


$$\text{RoHS} + \text{HF}$$


6.P/N:

SERIES NO: F0301 09 F 9-2 XX 2 X X 01

HEIGHT: 09: 0.9mm

MALE FEMALE: F-FEMALE

ANGLE: 9-90°





ROW NO: 2-DOUBLE ROW

COLOR: M-BEIGE
K-WHITE
S-NATURE

PLATING: A-ALL AU G/F
1-G/F
C-BRIGHE TIN

TERMIPOINT: 2-SMT

PIN Q' PY: 09~71

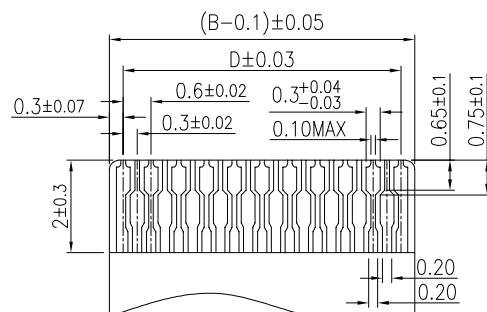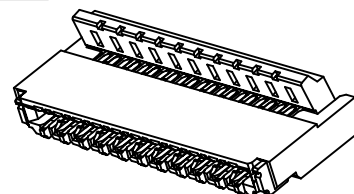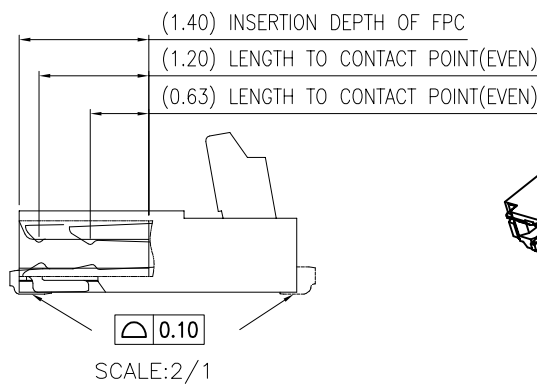

Circuit	Dimensions(mm)				Circuit	Dimensions(mm)			
	A	B	C	D		A	B	C	D
09	4.30	3.10	1.80	2.40	33	11.50	10.30	9.00	9.60
11	4.90	3.70	2.40	3.00	35	12.10	10.90	9.60	10.20
13	5.50	4.30	3.00	3.60	39	13.30	12.10	10.80	11.40
15	6.10	4.90	3.60	4.20	41	13.90	12.70	11.40	12.00
21	7.90	6.70	5.40	6.00	45	15.10	13.90	12.60	13.20
23	8.50	7.30	6.00	6.60	51	16.90	15.70	14.40	15.00
25	9.10	7.90	6.60	7.20	61	19.90	18.70	17.40	18.00
29	10.30	9.10	7.80	8.40	71	22.90	21.70	20.40	21.00
31	10.90	9.70	8.40	9.00					

NO.	COMPONENTS	MATERIALS	COLOR/SPECIFICATION	QUANTITY
①	HOUSING	LCP	NATURAL UL94V-0	1 PCS
②	COVER	PA9T	BLACK UL94V-0	1 PCS
③	CONTACT	PHOSPHOR BRONZE	T=0.12mm PLATING	POSITIONS
④	CONTACT	PHOSPHOR BRONZE	T=0.12mm PLATING	POSITIONS
⑤	SOLDER TABS	BRASS	T=0.15mm PLATING	2 PCS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12	F030109F9-2XX2XX01	ENDE05		
				0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch 0.30mm H0.9mm双排卧贴后掀盖双面接 FPC		REV: AO	SHEET: 1/2
			UNIT:mm	0.00±0.25	X'±3°							
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.10.12				




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements




RoHS+HF

6. QTY. LIST:




Circuit	A	B	PCS/盘
4~8PIN	16.0		3000
9~24PIN	24.0		3000
25~34 PIN	32.0	28.4	3000



- NOTES:
- MATERIAL:
 - CARRY TAPE:HIPS,T=0.30±0.05mm,CLEAR
 - REEL:HIPS,
 - SHIM:PE,CLEAR.
 - PRIMARY PACKING:3,000PCS/REEL.
 - SECONDARY PACKING:SEE PACKING LIST
 - PEELING RESISTANCE: 0.1~0.7N(10~70gf); PEELING ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

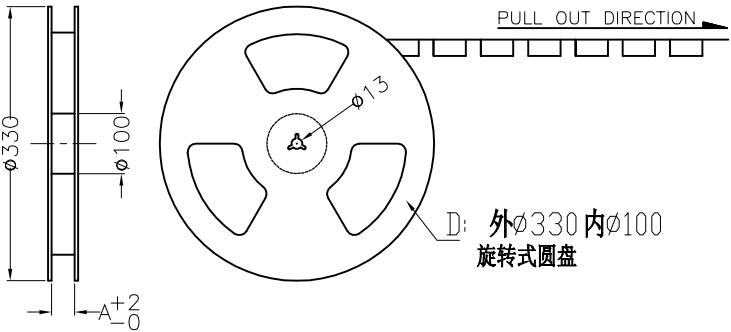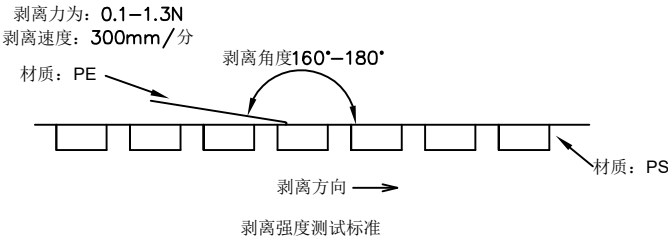

D: 外330内100
旋转式圆盘

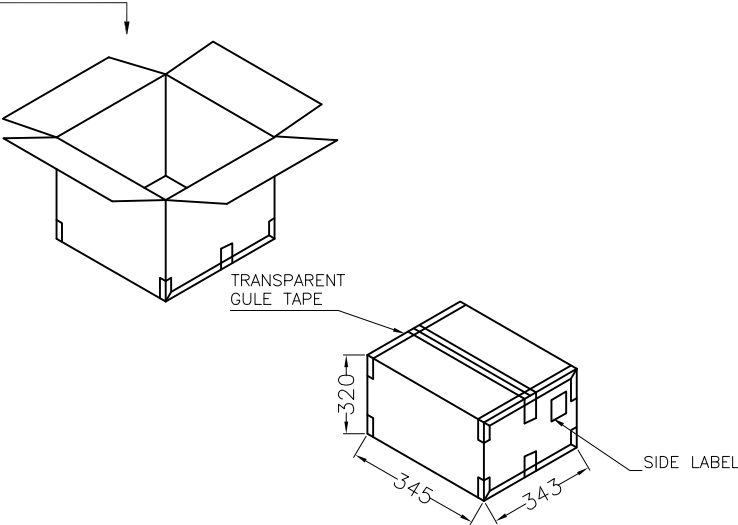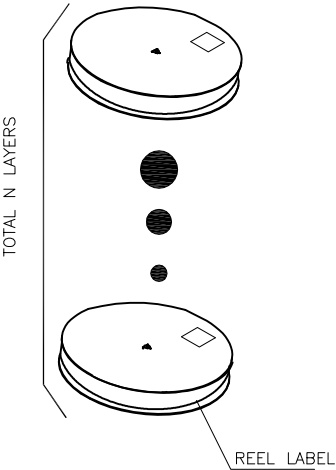

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: F030109F9-2XX2XX01	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12				
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.10.12				
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.10.12	TITLE: 包装规范			
			SIZE: A4	0.000±0.10	X°X'±2°							
											REV: A0	SHEET: 2/2