



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements




RoHS+HF

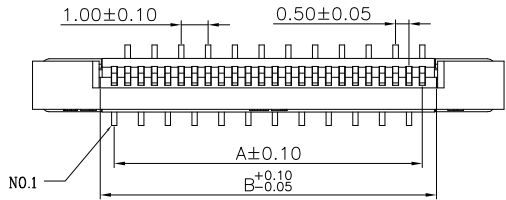


1-正脚位





With cover

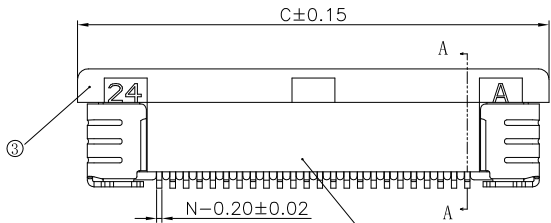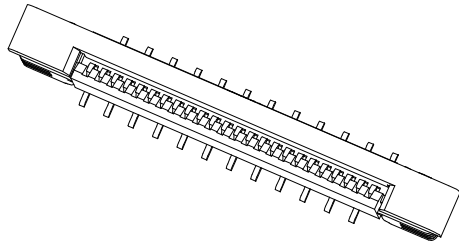


4PIN-5PIN贴MYLAY



SECTION:A-A

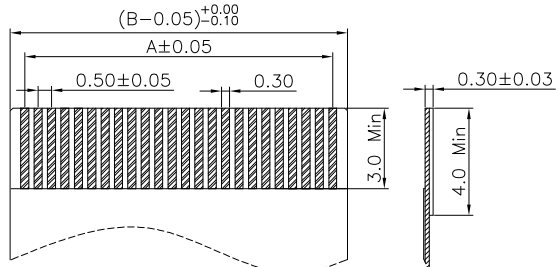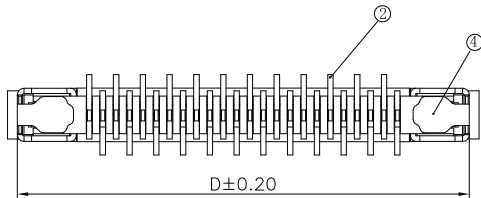

适用编平线 (Applicable Flat Cable)

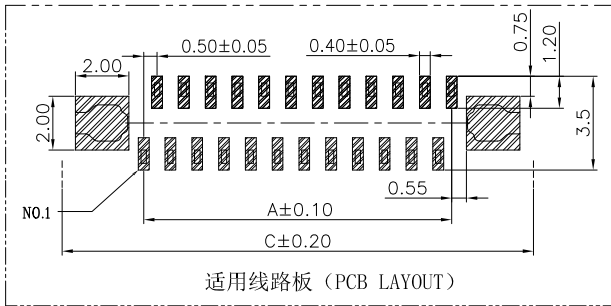

适用线路板 (PCB LAYOUT)

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING: LCP,UL94V-0
- 1-2.CONTACTS: PHOSPHOR BRONZE
- 1-3.SOLDER TABS: BRASS

2.PLATING SPECIFICATION:

- 2-1.CONTACTS: MATTE TIN PLATED OVER ALL.
- 2-2.SOLDER TABS: MATTE TIN PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

- 3-1.CURRENT RATING: 0.5A
RATED VOLTAGE : 50V
- 3-2.CONTACT RESISTANCE: 30 mΩ MAX
- 3-3.INSULATION RESISTANCE: 100MΩ Min
- 3-4.DIELECTRIC WITHSTANDING : 250V AC

4.ENVIRONMENTAL PERFORMANCE:

- 4-1.OPERATING TEMPERATURE: -25°C~+85°C.

5.PACKAGE SPEC: REEL

6.P/N:

SERIES NO: F0505 45 F 0-1 XX 2 X X 0X
HEIGHT: 45: 4.5mm
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 1-SINGLE ROW
PIN Q' PY: 04~60
TYPE: 1-正脚位
2-反脚位
COLOR: A-BLACK
S-NATURE
PLATING: A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin
TERMIPOINT: 2-SMT



序号	名称	材质
①	胶壳	LCP UL94V-0本色
②	端子	铜合金/表面镀锡
③	后盖	LCP UL94V-0黑色
④	焊片	铜合金/表面镀锡

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	F050545F0-1XX2XX0X	ENDE05		
			UNIT:mm	0.0±0.35	X°REF±6°	CHECK	XueZe_Ma	22.10.28	TITLE: Pitch 0.50mm H4.5mm立贴抽屉式正脚位 FPC		REV: A0	SHEET: 1/6
				0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28				
			SIZE: A4	0.000±0.10	X°X'±2°							




	1	2	3	4	5	6	7	8																																																																																																																																																																																																																																																																																																																										
A	The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																																																																																																																																																																																																																																																																																																	
B	RoHS+HF																																																																																																																																																																																																																																																																																																																																	
C	<table><tr><th rowspan="2">Circuit</th><th colspan="5">Dimensions(mm)</th><th rowspan="2">Circuit</th><th colspan="5">Dimensions(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th></tr><tr><td>04</td><td>1.50</td><td>2.56</td><td>7.60</td><td>6.88</td><td rowspan="16">4.45</td><td>33</td><td>16.00</td><td>17.06</td><td>22.10</td><td>21.38</td><td rowspan="2">4.45</td></tr><tr><td>05</td><td>2.00</td><td>3.06</td><td>8.10</td><td>7.38</td><td>34</td><td>16.50</td><td>17.56</td><td>22.60</td><td>21.88</td></tr><tr><td>06</td><td>2.50</td><td>3.56</td><td>8.60</td><td>7.88</td><td>35</td><td>17.00</td><td>18.06</td><td>23.10</td><td>22.38</td></tr><tr><td>07</td><td>3.00</td><td>4.06</td><td>9.10</td><td>8.38</td><td>36</td><td>17.50</td><td>18.56</td><td>23.60</td><td>22.88</td></tr><tr><td>08</td><td>3.50</td><td>4.56</td><td>9.60</td><td>8.88</td><td>37</td><td>18.00</td><td>19.06</td><td>24.10</td><td>23.38</td></tr><tr><td>09</td><td>4.00</td><td>5.06</td><td>10.10</td><td>9.38</td><td>38</td><td>18.50</td><td>19.56</td><td>24.60</td><td>23.88</td></tr><tr><td>10</td><td>4.50</td><td>5.56</td><td>10.60</td><td>9.88</td><td>39</td><td>19.00</td><td>20.06</td><td>25.10</td><td>24.38</td></tr><tr><td>11</td><td>5.00</td><td>6.06</td><td>11.10</td><td>10.38</td><td>40</td><td>19.50</td><td>20.56</td><td>25.60</td><td>24.88</td></tr><tr><td>12</td><td>5.50</td><td>6.56</td><td>11.60</td><td>10.88</td><td>41</td><td>20.00</td><td>21.06</td><td>26.10</td><td>25.38</td></tr><tr><td>13</td><td>6.00</td><td>7.06</td><td>12.10</td><td>11.38</td><td>42</td><td>20.50</td><td>21.56</td><td>26.60</td><td>25.88</td></tr><tr><td>14</td><td>6.50</td><td>7.56</td><td>12.60</td><td>11.88</td><td>43</td><td>21.00</td><td>22.06</td><td>27.10</td><td>26.38</td></tr><tr><td>15</td><td>7.00</td><td>8.06</td><td>13.10</td><td>12.38</td><td>44</td><td>21.50</td><td>22.56</td><td>27.60</td><td>26.88</td></tr><tr><td>16</td><td>7.50</td><td>8.56</td><td>13.60</td><td>12.88</td><td>45</td><td>22.00</td><td>23.06</td><td>28.10</td><td>27.38</td></tr><tr><td>17</td><td>8.00</td><td>9.06</td><td>14.10</td><td>13.38</td><td>46</td><td>22.50</td><td>23.56</td><td>28.60</td><td>27.88</td></tr><tr><td>18</td><td>8.50</td><td>9.56</td><td>14.60</td><td>13.88</td><td>47</td><td>23.00</td><td>24.06</td><td>29.10</td><td>28.38</td></tr><tr><td>19</td><td>9.00</td><td>10.06</td><td>15.10</td><td>14.38</td><td>48</td><td>23.50</td><td>24.56</td><td>29.60</td><td>28.88</td></tr><tr><td>20</td><td>9.50</td><td>10.56</td><td>15.60</td><td>14.88</td><td>49</td><td>24.00</td><td>25.06</td><td>30.10</td><td>29.38</td></tr><tr><td>21</td><td>10.00</td><td>11.06</td><td>16.10</td><td>15.38</td><td>50</td><td>24.50</td><td>25.56</td><td>30.60</td><td>29.88</td></tr><tr><td>22</td><td>10.50</td><td>11.56</td><td>16.60</td><td>15.88</td><td>51</td><td>25.00</td><td>26.06</td><td>31.10</td><td>30.38</td></tr><tr><td>23</td><td>11.00</td><td>12.06</td><td>17.10</td><td>16.38</td><td>52</td><td>25.50</td><td>26.56</td><td>31.60</td><td>30.88</td></tr><tr><td>24</td><td>11.50</td><td>12.56</td><td>17.60</td><td>16.88</td><td>53</td><td>26.00</td><td>27.06</td><td>32.10</td><td>31.38</td></tr><tr><td>25</td><td>12.00</td><td>13.06</td><td>18.10</td><td>17.38</td><td>54</td><td>26.50</td><td>27.56</td><td>32.60</td><td>31.88</td></tr><tr><td>26</td><td>12.50</td><td>13.56</td><td>18.60</td><td>17.88</td><td>55</td><td>27.00</td><td>28.06</td><td>33.10</td><td>32.38</td></tr><tr><td>27</td><td>13.00</td><td>14.06</td><td>19.10</td><td>18.38</td><td>56</td><td>27.50</td><td>28.56</td><td>33.60</td><td>32.88</td></tr><tr><td>28</td><td>13.50</td><td>14.56</td><td>19.60</td><td>18.88</td><td>57</td><td>28.00</td><td>29.06</td><td>34.10</td><td>33.38</td></tr><tr><td>29</td><td>14.00</td><td>15.06</td><td>20.10</td><td>19.38</td><td>58</td><td>28.50</td><td>29.56</td><td>34.60</td><td>33.88</td></tr><tr><td>30</td><td>14.50</td><td>15.56</td><td>20.60</td><td>19.88</td><td>59</td><td>29.00</td><td>30.06</td><td>35.10</td><td>34.38</td></tr><tr><td>31</td><td>15.00</td><td>16.06</td><td>21.10</td><td>20.38</td><td>60</td><td>29.50</td><td>30.56</td><td>35.60</td><td>34.88</td></tr><tr><td>32</td><td>15.50</td><td>16.56</td><td>21.60</td><td>20.88</td><td></td><td></td><td></td><td></td><td></td></tr></table>								Circuit	Dimensions(mm)					Circuit	Dimensions(mm)					A	B	C	D	E	A	B	C	D	E	04	1.50	2.56	7.60	6.88	4.45	33	16.00	17.06	22.10	21.38	4.45	05	2.00	3.06	8.10	7.38	34	16.50	17.56	22.60	21.88	06	2.50	3.56	8.60	7.88	35	17.00	18.06	23.10	22.38	07	3.00	4.06	9.10	8.38	36	17.50	18.56	23.60	22.88	08	3.50	4.56	9.60	8.88	37	18.00	19.06	24.10	23.38	09	4.00	5.06	10.10	9.38	38	18.50	19.56	24.60	23.88	10	4.50	5.56	10.60	9.88	39	19.00	20.06	25.10	24.38	11	5.00	6.06	11.10	10.38	40	19.50	20.56	25.60	24.88	12	5.50	6.56	11.60	10.88	41	20.00	21.06	26.10	25.38	13	6.00	7.06	12.10	11.38	42	20.50	21.56	26.60	25.88	14	6.50	7.56	12.60	11.88	43	21.00	22.06	27.10	26.38	15	7.00	8.06	13.10	12.38	44	21.50	22.56	27.60	26.88	16	7.50	8.56	13.60	12.88	45	22.00	23.06	28.10	27.38	17	8.00	9.06	14.10	13.38	46	22.50	23.56	28.60	27.88	18	8.50	9.56	14.60	13.88	47	23.00	24.06	29.10	28.38	19	9.00	10.06	15.10	14.38	48	23.50	24.56	29.60	28.88	20	9.50	10.56	15.60	14.88	49	24.00	25.06	30.10	29.38	21	10.00	11.06	16.10	15.38	50	24.50	25.56	30.60	29.88	22	10.50	11.56	16.60	15.88	51	25.00	26.06	31.10	30.38	23	11.00	12.06	17.10	16.38	52	25.50	26.56	31.60	30.88	24	11.50	12.56	17.60	16.88	53	26.00	27.06	32.10	31.38	25	12.00	13.06	18.10	17.38	54	26.50	27.56	32.60	31.88	26	12.50	13.56	18.60	17.88	55	27.00	28.06	33.10	32.38	27	13.00	14.06	19.10	18.38	56	27.50	28.56	33.60	32.88	28	13.50	14.56	19.60	18.88	57	28.00	29.06	34.10	33.38	29	14.00	15.06	20.10	19.38	58	28.50	29.56	34.60	33.88	30	14.50	15.56	20.60	19.88	59	29.00	30.06	35.10	34.38	31	15.00	16.06	21.10	20.38	60	29.50	30.56	35.60	34.88	32	15.50	16.56	21.60	20.88					
Circuit	Dimensions(mm)					Circuit	Dimensions(mm)																																																																																																																																																																																																																																																																																																																											
	A	B	C	D	E		A	B	C	D	E																																																																																																																																																																																																																																																																																																																							
04	1.50	2.56	7.60	6.88	4.45	33	16.00	17.06	22.10	21.38	4.45																																																																																																																																																																																																																																																																																																																							
05	2.00	3.06	8.10	7.38		34	16.50	17.56	22.60	21.88																																																																																																																																																																																																																																																																																																																								
06	2.50	3.56	8.60	7.88		35	17.00	18.06	23.10	22.38																																																																																																																																																																																																																																																																																																																								
07	3.00	4.06	9.10	8.38		36	17.50	18.56	23.60	22.88																																																																																																																																																																																																																																																																																																																								
08	3.50	4.56	9.60	8.88		37	18.00	19.06	24.10	23.38																																																																																																																																																																																																																																																																																																																								
09	4.00	5.06	10.10	9.38		38	18.50	19.56	24.60	23.88																																																																																																																																																																																																																																																																																																																								
10	4.50	5.56	10.60	9.88		39	19.00	20.06	25.10	24.38																																																																																																																																																																																																																																																																																																																								
11	5.00	6.06	11.10	10.38		40	19.50	20.56	25.60	24.88																																																																																																																																																																																																																																																																																																																								
12	5.50	6.56	11.60	10.88		41	20.00	21.06	26.10	25.38																																																																																																																																																																																																																																																																																																																								
13	6.00	7.06	12.10	11.38		42	20.50	21.56	26.60	25.88																																																																																																																																																																																																																																																																																																																								
14	6.50	7.56	12.60	11.88		43	21.00	22.06	27.10	26.38																																																																																																																																																																																																																																																																																																																								
15	7.00	8.06	13.10	12.38		44	21.50	22.56	27.60	26.88																																																																																																																																																																																																																																																																																																																								
16	7.50	8.56	13.60	12.88		45	22.00	23.06	28.10	27.38																																																																																																																																																																																																																																																																																																																								
17	8.00	9.06	14.10	13.38		46	22.50	23.56	28.60	27.88																																																																																																																																																																																																																																																																																																																								
18	8.50	9.56	14.60	13.88		47	23.00	24.06	29.10	28.38																																																																																																																																																																																																																																																																																																																								
19	9.00	10.06	15.10	14.38		48	23.50	24.56	29.60	28.88																																																																																																																																																																																																																																																																																																																								
20	9.50	10.56	15.60	14.88	49	24.00	25.06	30.10	29.38																																																																																																																																																																																																																																																																																																																									
21	10.00	11.06	16.10	15.38	50	24.50	25.56	30.60	29.88																																																																																																																																																																																																																																																																																																																									
22	10.50	11.56	16.60	15.88	51	25.00	26.06	31.10	30.38																																																																																																																																																																																																																																																																																																																									
23	11.00	12.06	17.10	16.38	52	25.50	26.56	31.60	30.88																																																																																																																																																																																																																																																																																																																									
24	11.50	12.56	17.60	16.88	53	26.00	27.06	32.10	31.38																																																																																																																																																																																																																																																																																																																									
25	12.00	13.06	18.10	17.38	54	26.50	27.56	32.60	31.88																																																																																																																																																																																																																																																																																																																									
26	12.50	13.56	18.60	17.88	55	27.00	28.06	33.10	32.38																																																																																																																																																																																																																																																																																																																									
27	13.00	14.06	19.10	18.38	56	27.50	28.56	33.60	32.88																																																																																																																																																																																																																																																																																																																									
28	13.50	14.56	19.60	18.88	57	28.00	29.06	34.10	33.38																																																																																																																																																																																																																																																																																																																									
29	14.00	15.06	20.10	19.38	58	28.50	29.56	34.60	33.88																																																																																																																																																																																																																																																																																																																									
30	14.50	15.56	20.60	19.88	59	29.00	30.06	35.10	34.38																																																																																																																																																																																																																																																																																																																									
31	15.00	16.06	21.10	20.38	60	29.50	30.56	35.60	34.88																																																																																																																																																																																																																																																																																																																									
32	15.50	16.56	21.60	20.88																																																																																																																																																																																																																																																																																																																														
D																																																																																																																																																																																																																																																																																																																																		
E																																																																																																																																																																																																																																																																																																																																		
F																																																																																																																																																																																																																																																																																																																																		
G																																																																																																																																																																																																																																																																																																																																		
H	<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="2">PART.NO: F050545F0-1XX2XX0X</td><td rowspan="2">DWG.NO: ENDE05</td><td rowspan="4"> WanLian Technology Co., Ltd</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>22.10.28</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>22.10.28</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X°REF±6°</td><td>CHECK</td><td>XueZe_Ma</td><td>22.10.28</td></tr><tr><td></td><td></td><td></td><td>UNIT:mm</td><td>0.00±0.25</td><td>X°±3°</td><td>DRAWN</td><td>LanXuan_Hou</td><td>22.10.28</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X°X' ±2°</td><td></td><td></td><td></td><td colspan="2">TITLE: Pitch 0.50mm H4.5mm立贴抽屉式正脚位 FPC</td><td>REV: A0</td><td>SHEET: 2/6</td></tr></table>	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: F050545F0-1XX2XX0X	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	AO	NEW RELEASE	22.10.28	LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28				0.0±0.35	X°REF±6°	CHECK	XueZe_Ma	22.10.28				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28				SIZE: A4	0.000±0.10	X°X' ±2°				TITLE: Pitch 0.50mm H4.5mm立贴抽屉式正脚位 FPC		REV: A0	SHEET: 2/6																																																																																																																																																																																																																																																																															
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: F050545F0-1XX2XX0X	DWG.NO: ENDE05				 WanLian Technology Co., Ltd																																																																																																																																																																																																																																																																																																																				
AO	NEW RELEASE	22.10.28		LINEAR		ANGLES	APPROVED	Wang_jr			22.10.28																																																																																																																																																																																																																																																																																																																							
				0.0±0.35		X°REF±6°	CHECK	XueZe_Ma	22.10.28																																																																																																																																																																																																																																																																																																																									
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28																																																																																																																																																																																																																																																																																																																									
			SIZE: A4	0.000±0.10	X°X' ±2°				TITLE: Pitch 0.50mm H4.5mm立贴抽屉式正脚位 FPC		REV: A0	SHEET: 2/6																																																																																																																																																																																																																																																																																																																						
	1	2	3	4	5	6	7	8																																																																																																																																																																																																																																																																																																																										

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements


RoHS+HF

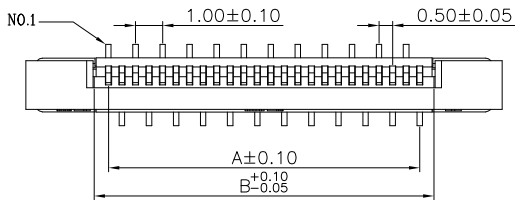



With cover

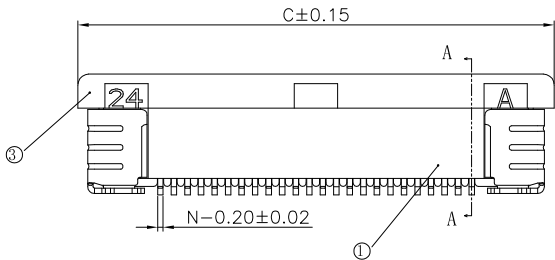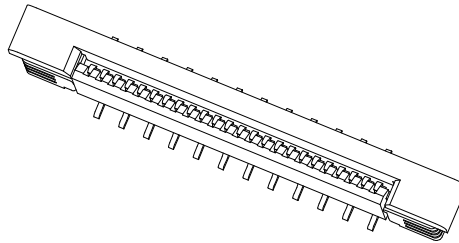


4PIN-5PIN贴MYLAY



SECTION:A-A

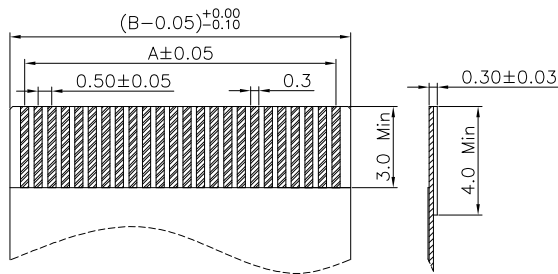

适用编平线 (Applicable Flat Cable)

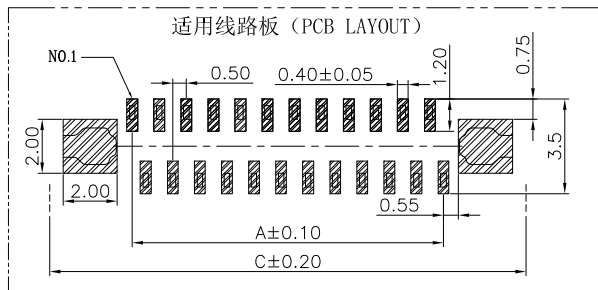

适用线路板 (PCB LAYOUT)

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: LCP,UL94V-0
 - CONTACTS: PHOSPHOR BRONZE
 - SOLDER TABS: BRASS
- PLATING SPECIFICATION:
 - CONTACTS: MATTE TIN PLATED OVER ALL.
 - SOLDER TABS: MATTE TIN PLATED OVER ALL.
- ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 0.5A
RATED VOLTAGE : 50V
 - CONTACT RESISTANCE: 30 mΩ MAX
 - INSULATION RESISTANCE: 100MΩ Min
 - DIELECTRIC WITHSTANDING : 250V AC
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
- PACKAGE SPEC: REEL
- P/N:

SERIES NO: F0505 45 F 0-1 XX 2 X X 0X
HEIGHT: 45: 4.5mm
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 1-SINGLE ROW
PIN Q' PY: 04~60
TYPE: 1-正脚位
2-反脚位
COLOR: A-BLACK
S-NATURE
PLATING: A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin
TERMIPOINT: 2-SMT




序号	名称	材质
①	胶壳	LCP UL94V-0本色
②	端子	铜合金/表面镀锡
③	后盖	LCP UL94V-0黑色
④	焊片	铜合金/表面镀锡

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	F050545F0-1XX2XX0X	ENDE05		
			UNIT:mm	0.0±0.35	X'REF±6°	CHECK	XueZe_Ma	22.10.28	TITLE: Pitch 0.50mm H4.5mm立贴抽屉式反脚位 FPC		REV: A0 SHEET: 3/6	
				0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.10.28				
			SIZE: A4	0.000±0.10	X*X'±2°							

1		2		3		4		5		6		7		8	
The product using material and processing must conform to the "WI -PZ-001"HSF technical standard control requirements															
RoHS+HF															
Circuit		Dimensions(mm)				Circuit		Dimensions(mm)							
		A	B	C	D			A	B	C	D				
04		1.50	2.56	7.60	4.45	33		16.00	17.06	22.10	4.45				
05		2.00	3.06	8.10		34		16.50	17.56	22.60					
06		2.50	3.56	8.60		35		17.00	18.06	23.10					
07		3.00	4.06	9.10		36		17.50	18.56	23.60					
08		3.50	4.56	9.60		37		18.00	19.06	24.10					
09		4.00	5.06	10.10		38		18.50	19.56	24.60					
10		4.50	5.56	10.60		39		19.00	20.06	25.10					
11		5.00	6.06	11.10		40		19.50	20.56	25.60					
12		5.50	6.56	11.60		41		20.00	21.06	26.10					
13		6.00	7.06	12.10		42		20.50	21.56	26.60					
14		6.50	7.56	12.60		43		21.00	22.06	27.10					
15		7.00	8.06	13.10		44		21.50	22.56	27.60					
16		7.50	8.56	13.60		45		22.00	23.06	28.10					
17		8.00	9.06	14.10		46		22.50	23.56	28.60					
18		8.50	9.56	14.60		47		23.00	24.06	29.10					
19		9.00	10.06	15.10		48		23.50	24.56	29.60					
20		9.50	10.56	15.60		49		24.00	25.06	30.10					
21		10.00	11.06	16.10		50		24.50	25.56	30.60					
22		10.50	11.56	16.60		51		25.00	26.06	31.10					
23		11.00	12.06	17.10		52		25.50	26.56	31.60					
24		11.50	12.56	17.60		53		26.00	27.06	32.10					
25		12.00	13.06	18.10		54		26.50	27.56	32.60					
26		12.50	13.56	18.60		55		27.00	28.06	33.10					
27		13.00	14.06	19.10		56		27.50	28.56	33.60					
28		13.50	14.56	19.60		57		28.00	29.06	34.10					
29		14.00	15.06	20.10		58		28.50	29.56	34.60					
30		14.50	15.56	20.60		59		29.00	30.06	35.10					
31		15.00	16.06	21.10		60		29.50	30.56	35.60					
32		15.50	16.56	21.60											
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd				
A0	NEW RELEASE	22.10.28		LINEAR		ANGLES	APPROVED	Wang_jr	22.10.28	F050545F0-1XX2XX0X		ENDE05			
				0.0±0.35		X°REF±6°	CHECK	XueZe_Ma	22.10.28	TITLE:					
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28	Pitch 0.50mm H4.5mm立贴抽屉式反脚位 FPC					
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A0	SHEET: 4/6			
1		2		3		4		5		6		7		8	

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS+HF

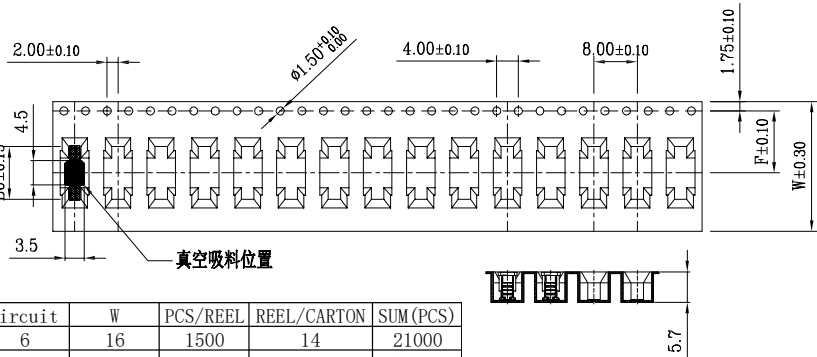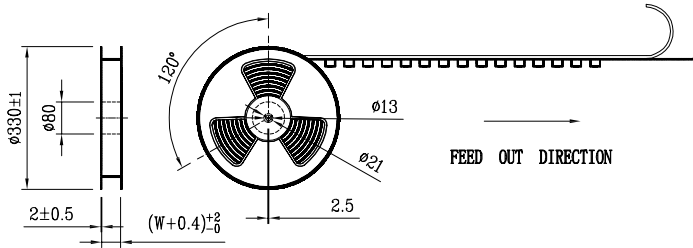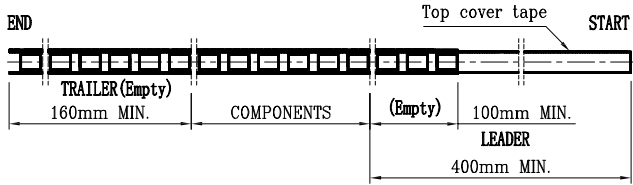

Circuit	W	PCS/REEL	REEL/CARTON	SUM(PCS)
6	16	1500	14	21000
7		1500	10	15000
8		1500	10	15000
9		1500	10	15000
10		1500	10	15000
11		1500	10	15000
12		1500	10	15000
13		1500	10	15000
14		1500	10	15000
15		1500	10	15000
16		1500	10	15000
17		1500	10	15000
18		1500	10	15000

NOTE(注):

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$. (10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm. (载带拱/弧形MAX 1/100mm)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS. (所有的尺寸要满足协会EIA-481 规范.)
4. MATTIRIAL: BLACK ANTISTATIC PS. (载带材料: 黑色抗静电PS.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGHT PER REEL: 13 METERS. (每卷包装长度: 13米.)
7. COMPONENT LOAD PER REEL: 1500 PCS. (每卷包装数量: 1500只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

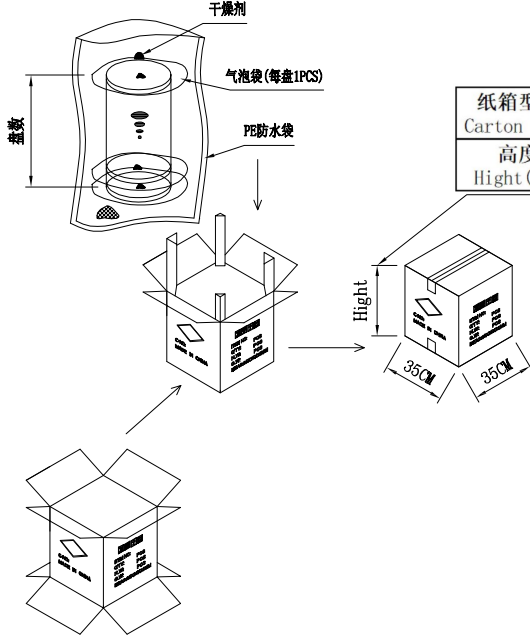

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Hight (CM)	7.5	15	32

Circuit	B0	W	F
6	8.20	16	11.4
7	8.70	24	
8	9.20		
9	9.70		
10	10.20		
11	10.70		
12	11.20		
13	11.70		
14	12.20		
15	12.70		
16	13.20		
17	13.70		
18	14.20		

