

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements








RoHS+HF

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: LCP, UL94V-0
    - CONTACTS: PHOSPHOR BRONZE
  - PLATING SPECIFICATION:
    - CONTACTS: MATTE TIN
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 0.5A  
RATED VOLTAGE : 50V
    - CONTACT RESISTANCE: 30 mΩ MAX
    - INSULATION RESISTANCE: 500MΩ Min
    - DIELECTRIC WITHSTANDING : 500V AC
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -40°C~+105°C.
  - PACKAGE SPEC: REEL
  - P/N:

SERIES NO: F1010 55 F 0-1 XX 2 X X 01  
 HEIGHT: \_\_\_\_\_  
 MALE FEMALE: \_\_\_\_\_  
 F-FEMALE \_\_\_\_\_  
 ANGLE: \_\_\_\_\_  
 0-180° \_\_\_\_\_  
 ROW NO: \_\_\_\_\_  
 1-SINGLE ROW \_\_\_\_\_

COLOR: S-NATURE  
 PLATING: D-MATTE TIN  
 TERMIPONT: 2-SMT  
 PIN Q'PY: 04~30

Circuit	Dimensions(mm)			
	A	B	C	D
06	5.00	7.15	11.20	13.10
08	7.00	9.15	13.20	15.10
10	9.00	11.15	15.20	17.10
12	11.00	13.15	17.20	19.10
14	13.00	15.15	19.20	21.10
15	14.00	16.15	20.20	22.10
16	15.00	17.15	21.20	23.10
18	17.00	19.15	23.20	25.10
20	19.00	21.15	25.20	27.10
22	21.00	23.15	27.20	29.10
24	23.00	25.15	29.20	31.10
25	24.00	26.15	30.20	32.10
26	25.00	27.15	31.20	33.10
28	27.00	29.15	33.20	35.10
29	28.00	30.15	34.20	36.10
30	29.00	31.15	35.20	37.10

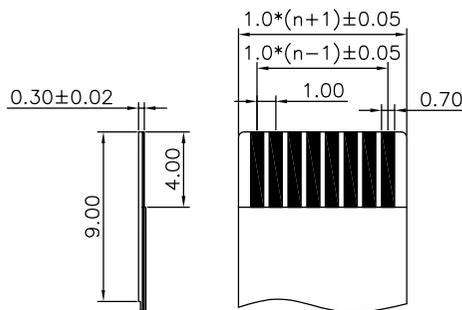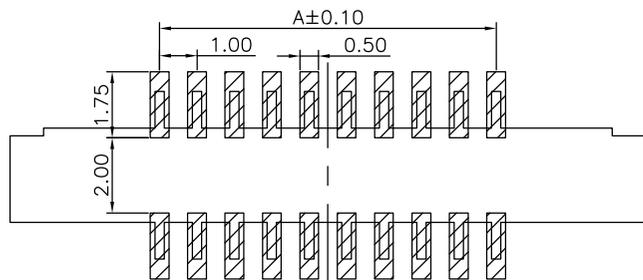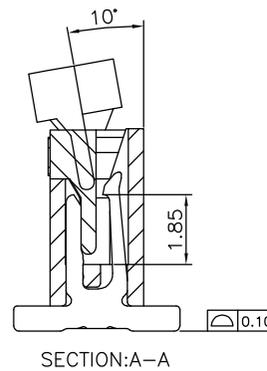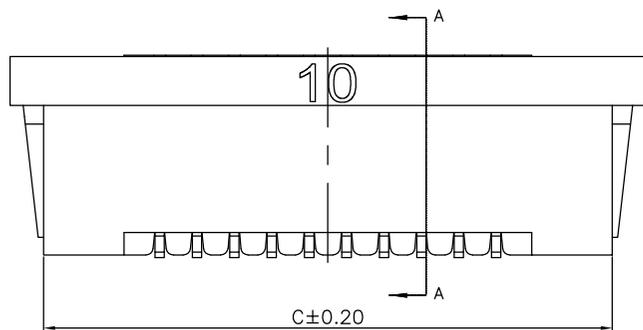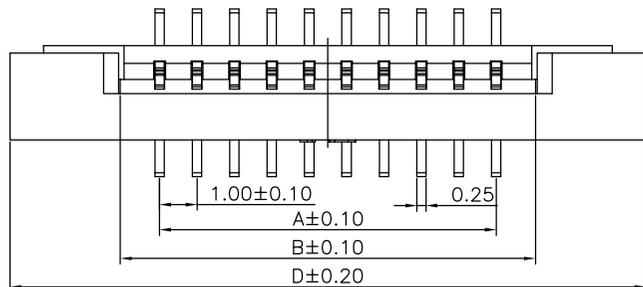




PROPER CABLE (SCALE 2:1)

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	22.11.07	LINEAR	ANGLES	1:1	Wang_jr	22.11.07	F101055F0-1XX2XX01	ENDE05
			0.0±0.35	X'REF±6°	APPROVED	XueZe_Ma	22.11.07	TITLE: Pitch 1.00mm H5.5立贴抽屜式FPC	WanLian Technology Co., Ltd
			0.00±0.25	X'±3°	CHECK	LanXuan_Hou	22.11.07		
			0.000±0.10	X'X' ±2°	DRAWN				
			UNIT:mm					REV: A0	SHEET: 1/2





The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

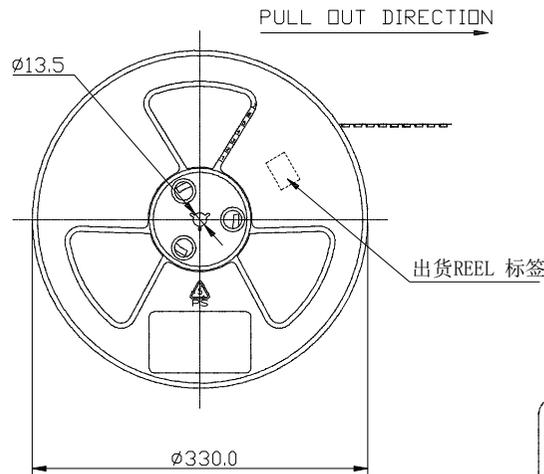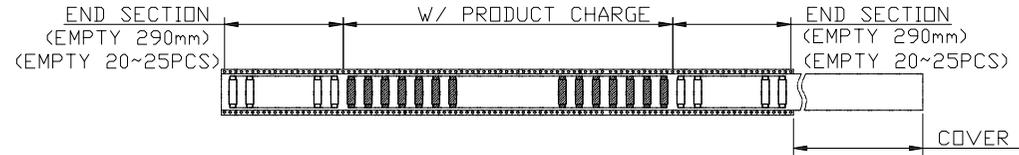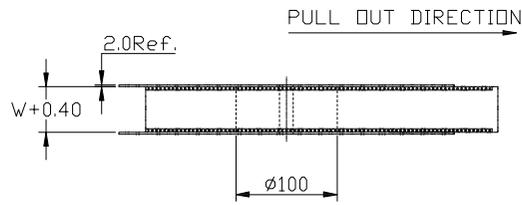


SCALE 3:20

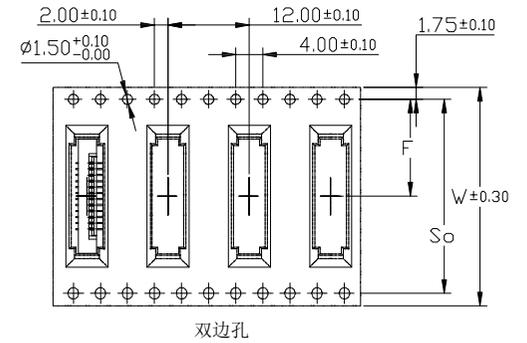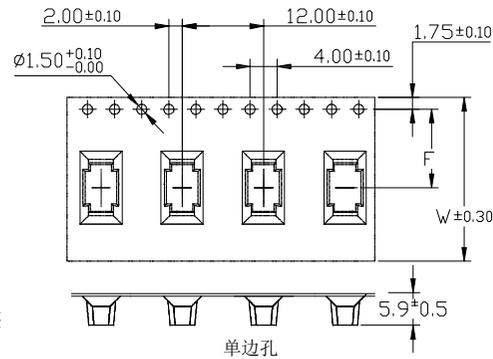

DIM TABLE :




PIN NO.	DIM W	DIM F	DIM So
04~07	24.0±0.30	11.50±0.20	-- 单边孔
08~12	32.0±0.30	14.20±0.20	28.4±0.20
13~26	44.0±0.30	20.20±0.25	40.4±0.20
27~34	56.0±0.30	26.20±0.25	52.4±0.20



1. 包装方式:  
 1. 1载带头尾槽空约20-25pcs穴槽.  
 1. 2每REEL共包装产品900PCS.

注意

1. 防止漏装.  
 2. 产品在CARRY TAPE 中的方向须与图一致.  
 3. COVER TYPE 剥离力: 30.0—130gf, 速度: 300mm/min.  
 4. 包装标识/标签满足客户和厂内管制要求.



包装箱: 350\*350\*296

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd REV: A0 SHEET: 1/2
A0	NEW RELEASE	22.11.07	 LINEAR 0.0±0.35	ANGLES X'REF±6°	1:1	Wang_jr	22.11.07	F101055F0-1XX2XX01	ENDE05	
					UNIT:mm	X'±3°	CHECK	XueZe_Ma	22.11.07	
			SIZE: A4	X'X' ±2°	DRAWN	LanXuan_Hou	22.11.07	Pitch 1.00mm H5.5立贴抽屉式FPC		