

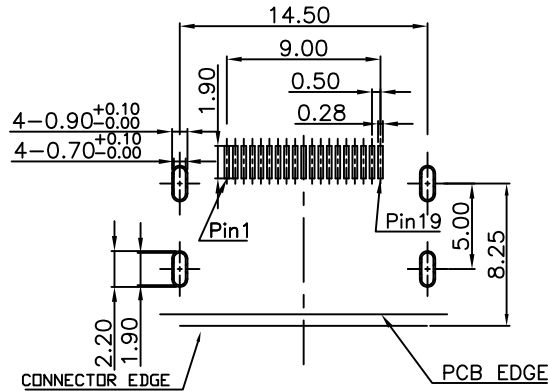
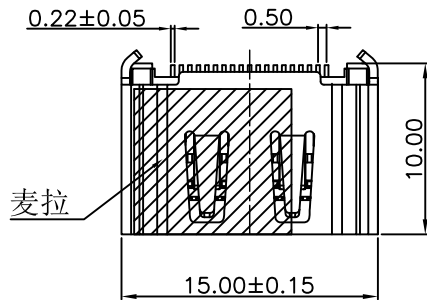





RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: $\pm 0.05\text{mm}$

SPECIFICATIONS:


- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 0.5 AMP
 - VOLTAGE RATING: 40 V
 - CONTACT RESISTANCE: 30MILLIOHMS MAX
 - INSULATION RESISTANCE: 100M MIN. @ 500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 4.5KGF MAX.
 - WITHDRAWING FORCE : 1KGF ~ 4KGF.
- LIFE TEST: 10000 CYCLES
- OPERATING TEMPERATURE: -25°C TO $+85^{\circ}\text{C}$
- PART NO. DESCRIPTION:

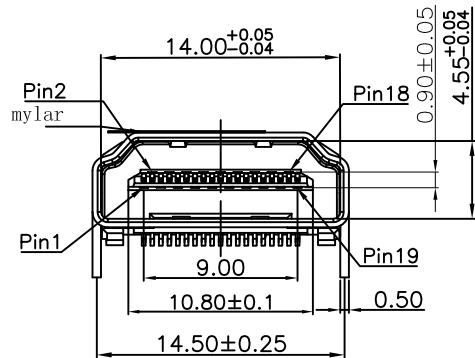

HDB11-19 B S L 66 A A L-R

PIN Poles: _____
 1-99PIN OF 01-99
 B:Female _____
 S:SMT 90° _____
 Insulator Material: _____
 L: LCP 9:PA9T B:PBT
 Height: _____
 66:6.6mm
 Plating: _____
 A: G/F Plated on Contact Area
 B: 3u" Plated on Contact Area
 D: 10u" Plated on Contact Area
 E: 15u" Plated on Contact Area
 G: 30u" Plated on Contact Area
 H: Tin Plated

R: RoHS
 H: HF
 Packing:
 B: Tray
 P: Bag
 G: Tube
 L: Tape reel
 Color:
 A: black



D	MYLAR	1	PI FILM BROWN
C	SHELL	1	C2680R-H Ni 50u" T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	TITLE: HDMI 反向SMT式 铜壳镀镍 端子 半金壳锡1u" 贴麦拉	JCTC® TERMINAL&CONNECTORS
A0	新图面发行	2020.06.22		LINEAR	ANGLES	APPROVED	GZT		HDB11-19BSL66AAL-R	ENDE05		
				0.0±0.35	X° REF±6°	DESIGNER	SMARK				REV: A0	SHEET: 1/1
			SIZE: A4	0.00±0.25	X° ±3°	DRAWN	DAIN					
				0.000±0.15	X° X'±2°							