


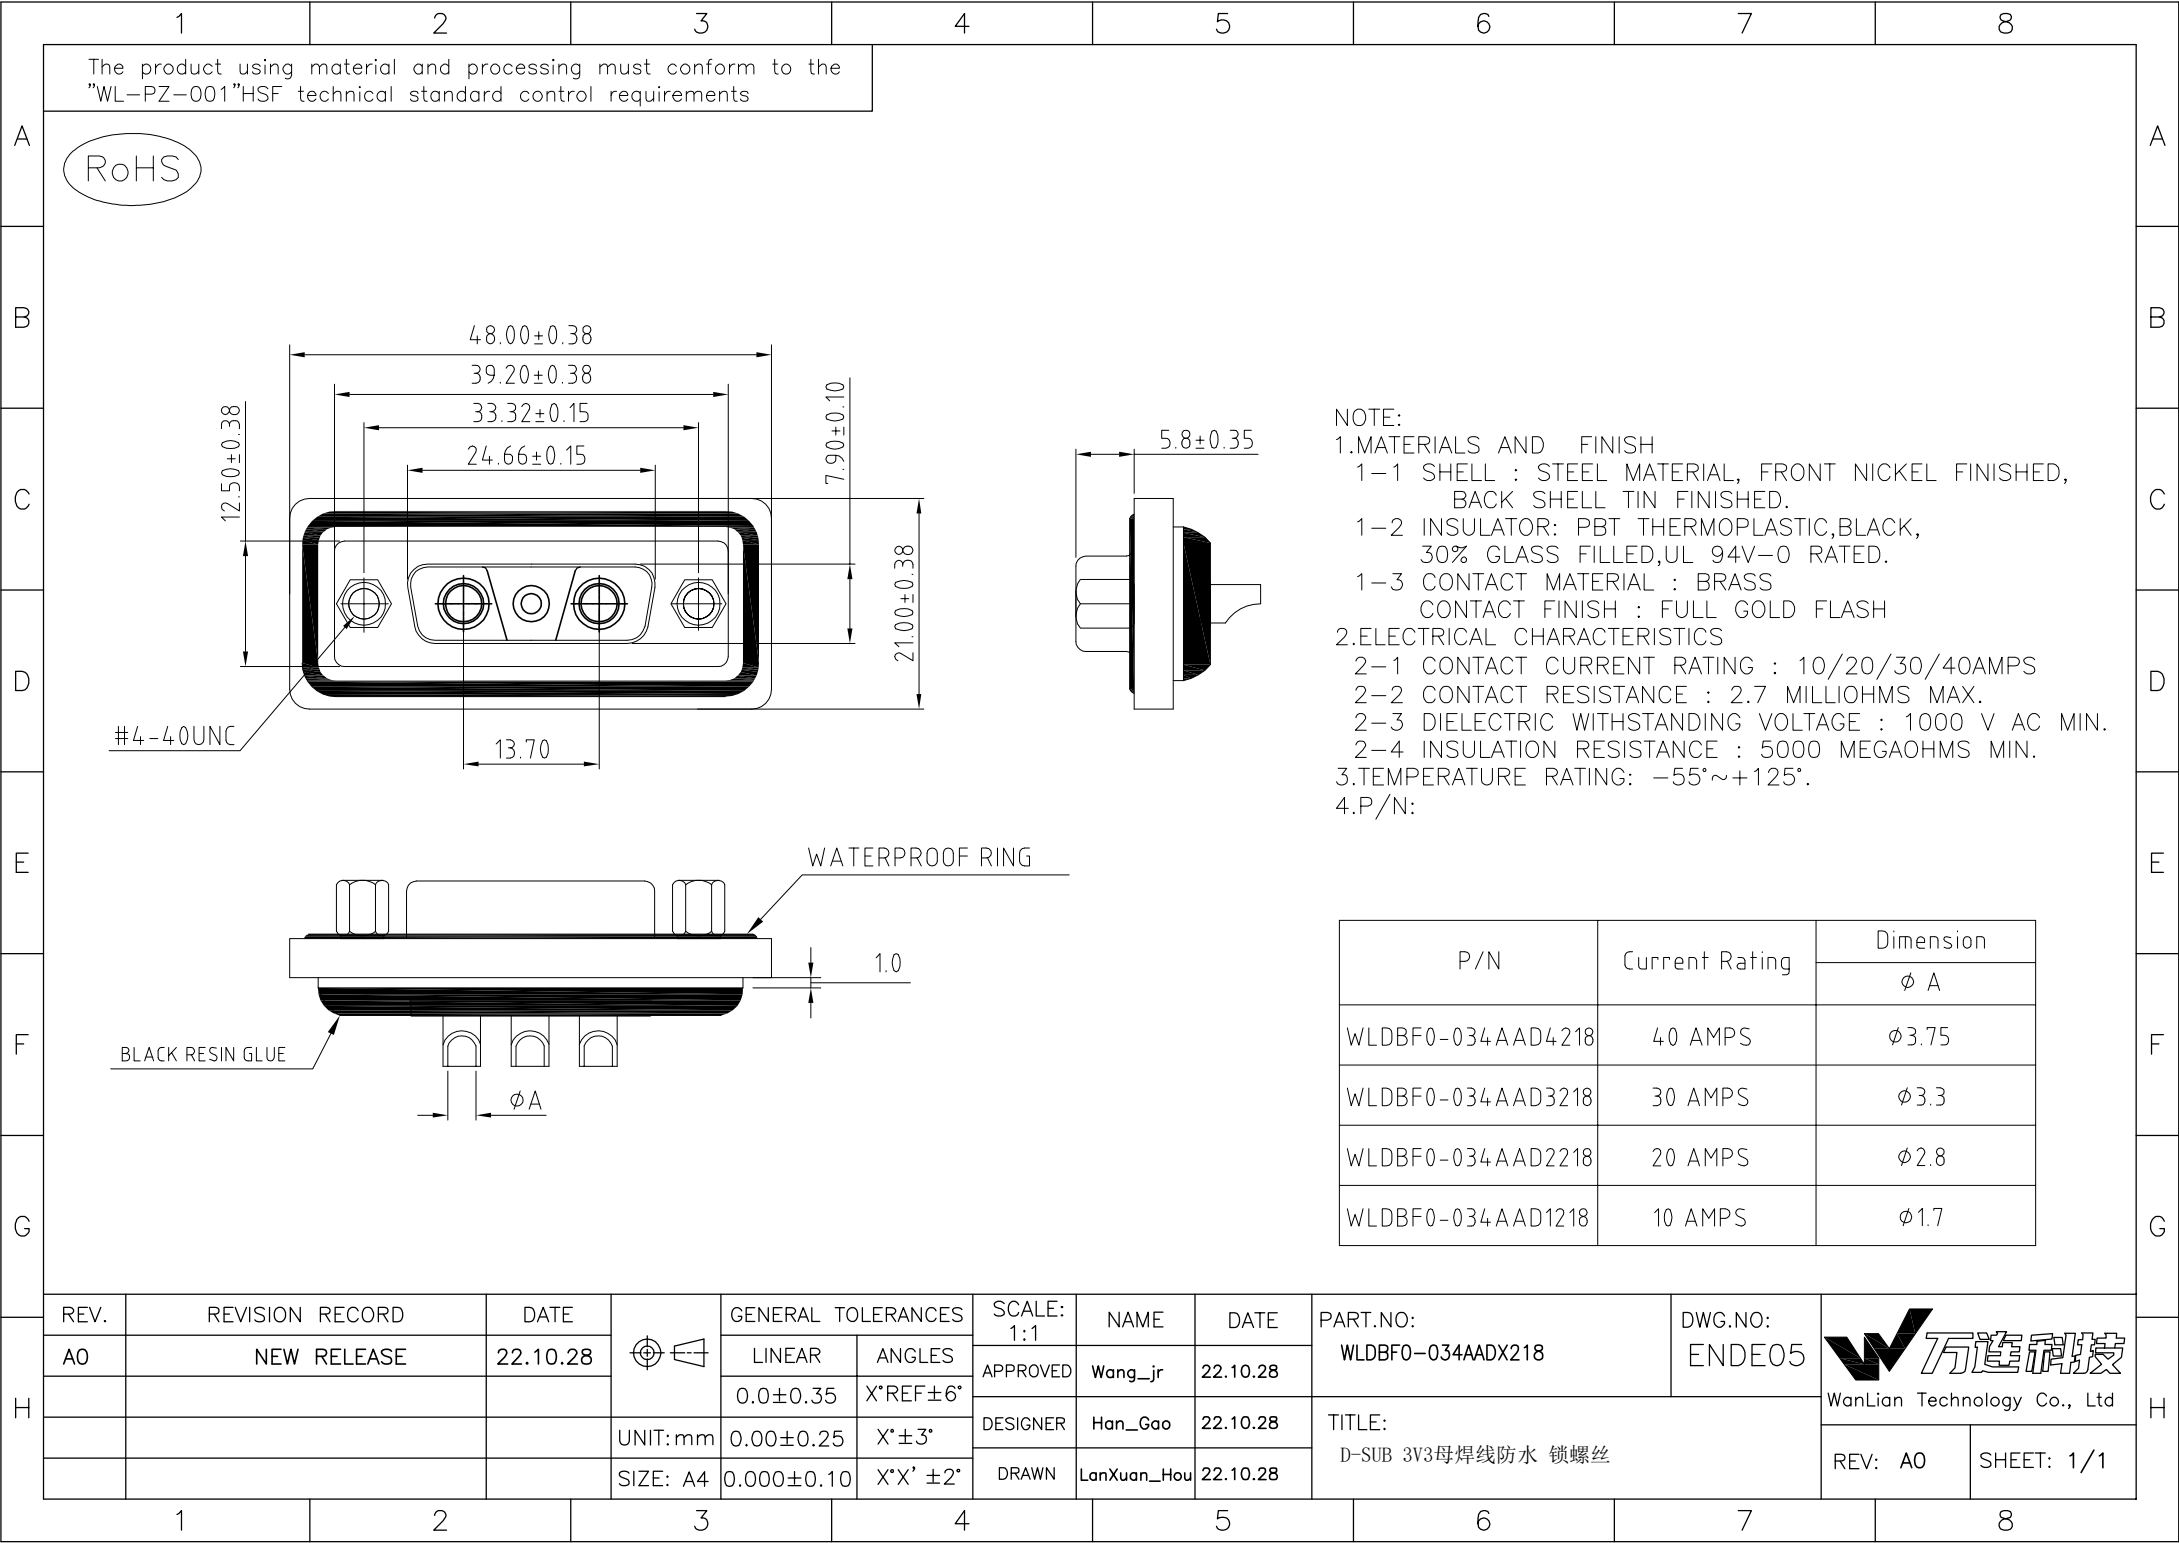

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

NOTE:
1.MATERIALS AND FINISH
1-1 SHELL : STEEL MATERIAL, FRONT NICKEL FINISHED, BACK SHELL TIN FINISHED.
1-2 INSULATOR: PBT THERMOPLASTIC,BLACK, 30% GLASS FILLED,UL 94V-0 RATED.
1-3 CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FLASH
2.ELECTRICAL CHARACTERISTICS
2-1 CONTACT CURRENT RATING : 10/20/30/40AMPS
2-2 CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
2-3 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
2-4 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
3.TEMPERATURE RATING: -55°~+125°.
4.P/N:

P/N	Current Rating	Dimension
		φ A
WLDBF0-034AAD4218	40 AMPS	φ3.75
WLDBF0-034AAD3218	30 AMPS	φ3.3
WLDBF0-034AAD2218	20 AMPS	φ2.8
WLDBF0-034AAD1218	10 AMPS	φ1.7

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBF0-034AADX218	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28				
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.10.28	TITLE: D-SUB 3V3母焊线防水 锁螺丝			
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou		22.10.28		
				SIZE: A4	0.000±0.10	X°X' ±2°						
											REV: A0	SHEET: 1/1