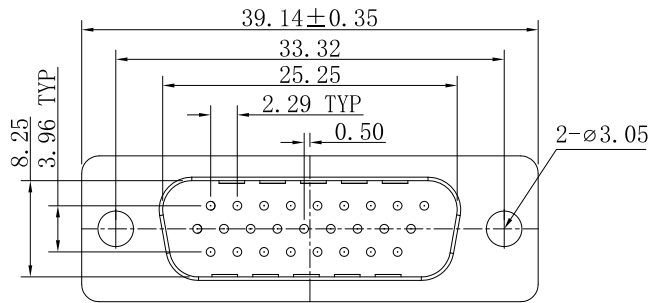
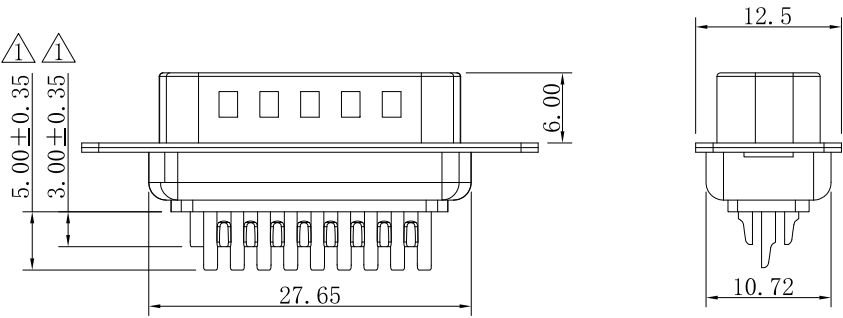











1	2	3	4	5	6	7	8																																																												
The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements							RoHS																																																												
A								A																																																											
B								B																																																											
C								C																																																											
D								D																																																											
E								E																																																											
F	<table><tr><td colspan="4">Specification Type</td></tr><tr><td>A</td><td>B</td><td colspan="2">C</td></tr><tr><td></td><td></td><td colspan="2"></td></tr></table>							Specification Type				A	B	C						F																																															
Specification Type																																																																			
A	B	C																																																																	
																																																																			
G								G																																																											
H	<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td>PART.NO:</td><td>DWG.NO:</td><td rowspan="4"> WanLian Technology Co., Ltd</td></tr><tr><td>A0</td><td>NEW RELEASE</td><td>21.01.13</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>21.01.13</td><td colspan="2">WLDBM0-264XXX046</td><td>ENDE05</td></tr><tr><td>A1</td><td>2.80Cha3.0//4.8Cha5.0  Add illustrate </td><td>24.5.21</td><td>0.0±0.35</td><td>X°REF±6°</td><td>DESIGNER</td><td>Ding_bo</td><td>21.01.13</td><td colspan="2">TITLE:</td><td></td></tr><tr><td></td><td></td><td></td><td>UNIT:mm</td><td>0.00±0.25</td><td>X°±3°</td><td>DRAWN</td><td>Ou_jian</td><td>21.01.13</td><td colspan="2">HDB 26M SOLDERING</td><td></td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X°X' ±2°</td><td></td><td></td><td></td><td></td><td></td><td>REV: A1</td><td>SHEET: 1/1</td></tr></table>							REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLDBM0-264XXX046		ENDE05	A1	2.80Cha3.0//4.8Cha5.0  Add illustrate 	24.5.21	0.0±0.35	X°REF±6°	DESIGNER	Ding_bo	21.01.13	TITLE:						UNIT:mm	0.00±0.25	X°±3°	DRAWN	Ou_jian	21.01.13	HDB 26M SOLDERING						SIZE: A4	0.000±0.10	X°X' ±2°						REV: A1	SHEET: 1/1	H
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		 WanLian Technology Co., Ltd																																																							
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLDBM0-264XXX046				ENDE05																																																						
A1	2.80Cha3.0//4.8Cha5.0  Add illustrate 	24.5.21		0.0±0.35	X°REF±6°	DESIGNER	Ding_bo	21.01.13	TITLE:																																																										
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Ou_jian	21.01.13	HDB 26M SOLDERING																																																									
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A1	SHEET: 1/1																																																							
1	2	3	4	5	6	7	8																																																												

△ MATERIAL:

- 1、HOUSING: PBT UL94V-0 BLACK 230° C±5
- 2、CONTACTS: BRASS、NI/AU/SN PLATED
- 3、SHELL: STAINLESS STEEL、CU/NI/SN PLATED .
- 4、SCREW: BRASS、NI PLATED .

CHARACTERISTICS/特性:

- 1、RATED VOLTAGE: 250V AC CD
- 2、RATED CURRENT: 3.0AMP
- 3、CONTACT RESISTANCE: 30mΩ MAX.
- 4、INSULATION RESISTANCE: 1000 MΩ MIN.500V DC
- 5、ELECTRIC PRESSURE: KEEPING 60 SECOND IN AC 500V/1MA
- 6、OPERATING TEMPERATURE: -55℃~105℃

△ 7、SALT:SHELL/48H

- 8、INSERTION/EXTRACTION FORCE PER CONTACT: 5.84Kg Max
0.45Kg Min

P/N: WLDBM0-26 4 X X X 046

Number of Contact

Contact Type
4: Soldering

Plating Contacts
1: Gold Flash
3: Au: 3u"
6: Au: 30u"

SCREW
A: Specification Type A
B: Specification Type B
C: Specification Type C

Housing color
A: Black
K: White