

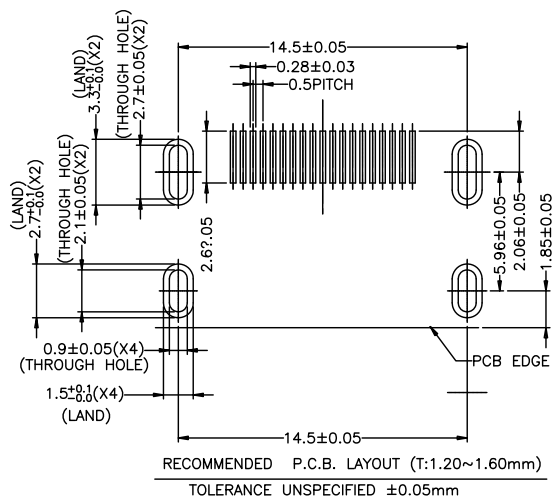


检验规范

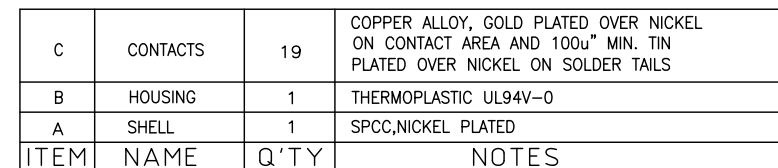

- 1.OPERATING CURRENT: 0.5A MAX.
- 2.OPERATION TEMPERATURE: -25°C TO +85°C
- 3.DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADJACENT TERMINAL(MATE)
- 4.INSULATION RESISTANCE:
100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)
- 5.HDMI SPECIFICATION COMPLIANCE
- 6.First piece confirm dimension: 'X'
- 7.Key inspection dimension: '▼'

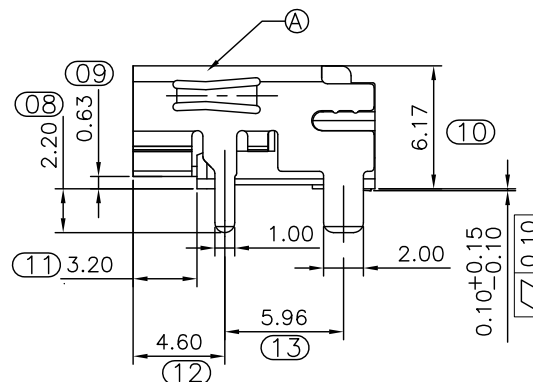

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	NOTES		
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLHDF9-1921A01-006	ENDE05	 WanLian Teconology Co., Ltd	REV: A0	SHEET: 1/1
				0.0±0.35	X°REF±6°								
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Ding_bo	21.01.13	TITLE:				
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Ou_jian	21.01.13	HDMI A TYPE R/A SMT CONNECTOR				

