

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

NOTE

1.MATERIAL:

- 1.1 INSULATOR: LCP UL94V-0 COLOR:BLACK
- 1.2 TERMINAL: SEE TABLE
- 1.3 SHELL: SEE TABLE

2.ELECTRICAL:

- 2.1 INSULATOR RESISTANCE: 500MEGOHMS MIN AT 100V DC.
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S
- 2.3 VOLTAGE TATING: 125V AC (RMS) CONTINUOUS MAX.
- 2.4 CURRENT RATING: 1.5A.
- 2.5 CONTGACT RESISTANCE: 40 MILLIOHMS MAX.






3.MECHANICAL

- 3.1 INSERTION/EXTRACTION FORCE : 2.24Kgf Max
- 3.2 DURRABILITY : 750 CYCLES



4.ENVIRONMENTAL

TEMPERATURE RANGE:-40°C TO + 85°C.

5. PACKAGE SPEC, REEL

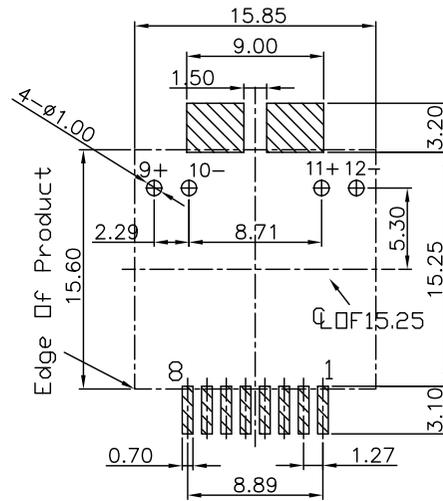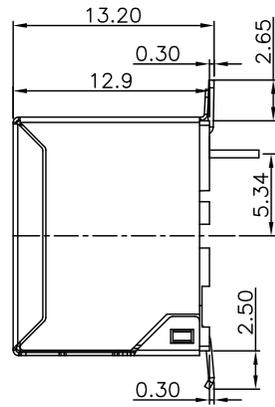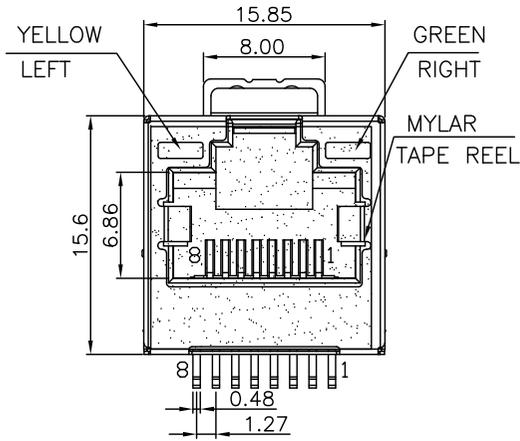

PCBLAYOUT T=1.6
TOL:±0.05




8	/
7	/
6	RX-
5	/
4	/
3	RX+
2	TX-
1	TX+
PIN序 说明	

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

7	1.4x3.2x4.0 平头半透明亮锡绿灯	1	SPCC T=0.5mm	胶体半透明绿色发绿光
6	1.4x3.2x4.0 平头半透明亮锡黄灯	1	SPCC T=0.5mm	胶体半透明黄色发黄光
5	RJ45 立式12.7H SMT有灯外壳	1	C2680 T=0.2mm	镍40u"
4	RJ45 立式12.7H接地片	1	C2680 T=0.35mm	镍50u"亮锡100u"
3	RJ45 立式12.7H端子	8	C5191 T=0.35mm	Au/亮锡100u"/NI 50u"
2	RJ45 立式12.7H SMT插芯半成品	1	LCP UL94V-0	BLACK
1	RJ45 立式12.7H无柱有灯主体	1	LCP UL94V-0	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR


REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co.,	
A0	NEW RELEASE	23.06.08	LINEAR	ANGLES	1:1	Wang_jr	23.06.08	WLR4FO-1221A0161	ENDE05	WanLian Technology Co.,	
			0.0±0.35	X'REF±6'		Ding_Bo	23.06.08	TITLE:		REV: A0	SHEET: 1/1
			UNIT:mm	X'±3'		Ou_Jian	23.06.08	RJ45 8P8C V/T H12.7 SMT W/ LED, W/ SHELL			
			SIZE: A4	X'X' ±2'							



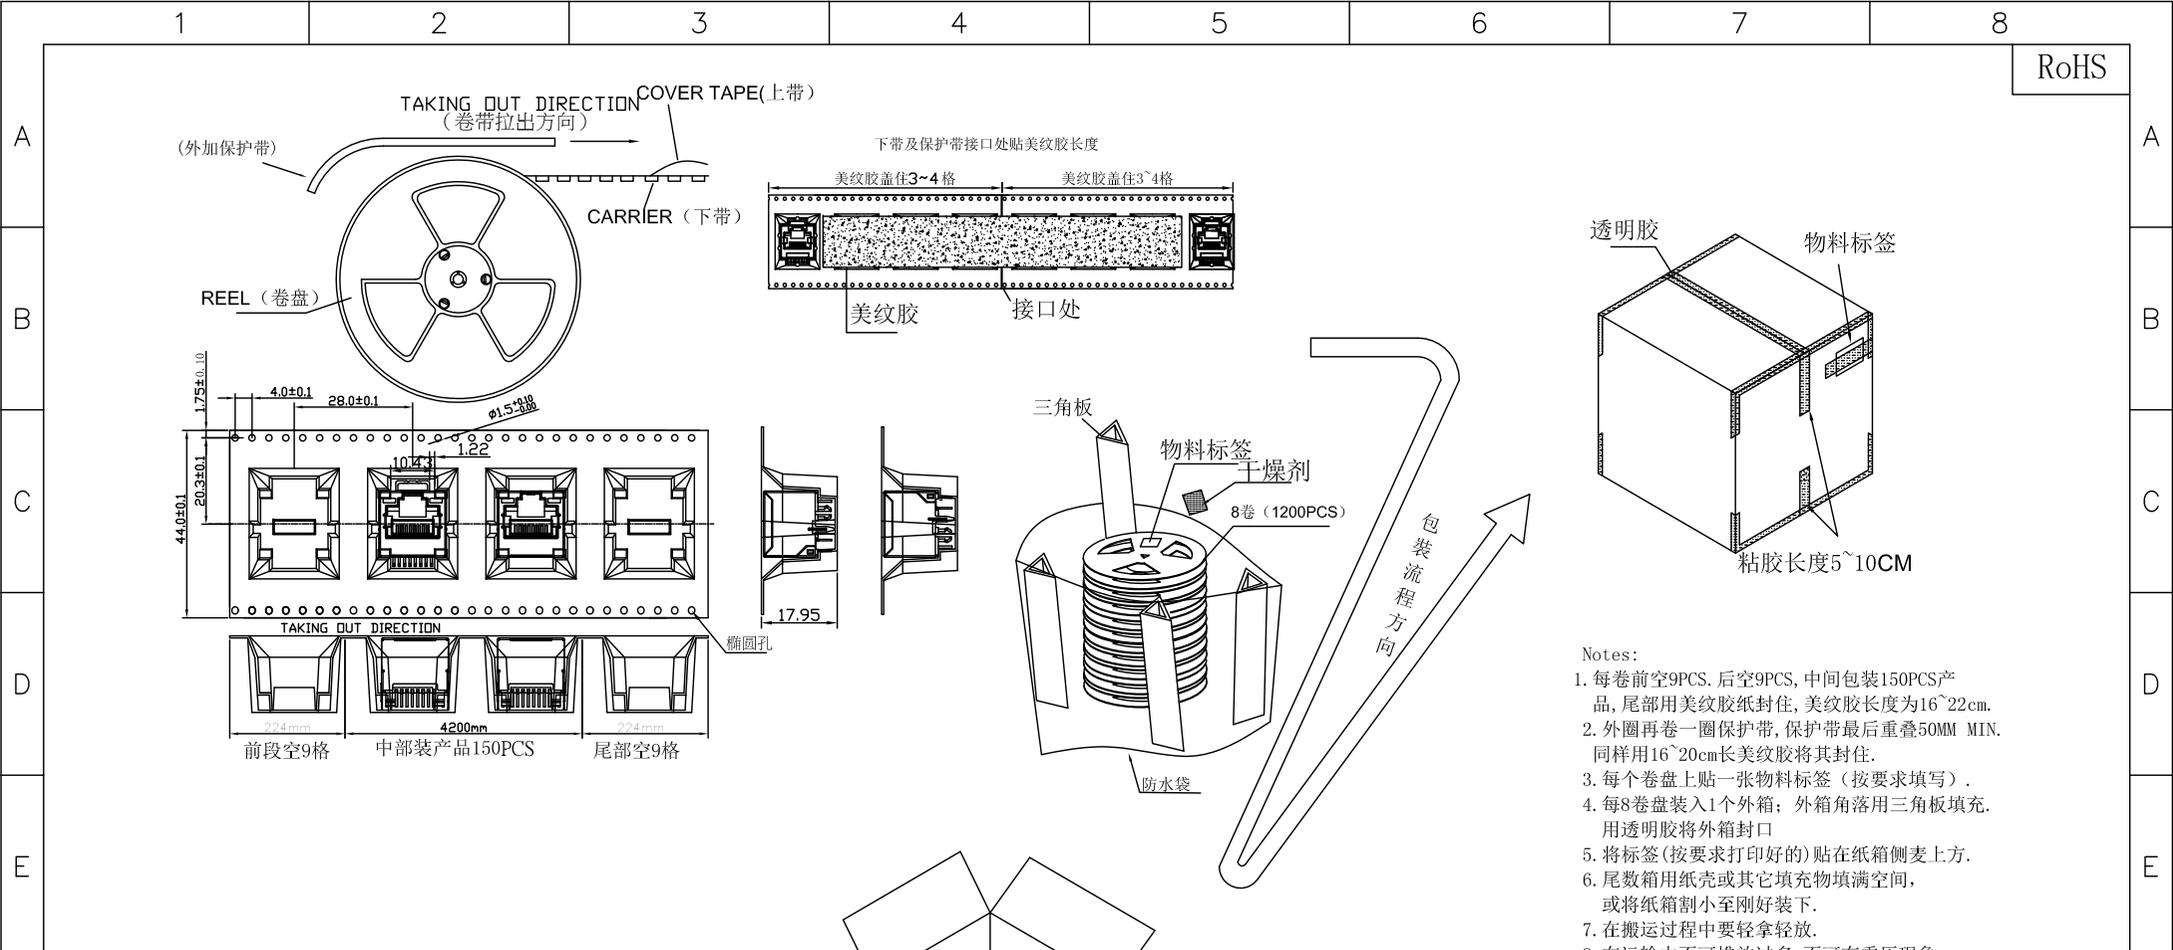

- Notes:
1. 每卷前空9PCS. 后空9PCS, 中间包装150PCS产品, 尾部用美纹胶纸封住, 美纹胶长度为16~22cm.
 2. 外圈再卷一圈保护带, 保护带最后重叠50MM MIN. 同样用16~20cm长美纹胶将其封住.
 3. 每个卷盘上贴一张物料标签(按要求填写).
 4. 每8卷盘装入1个外箱; 外箱角落用三角板填充. 用透明胶将外箱封口
 5. 将标签(按要求打印好的)贴在纸箱侧麦上方.
 6. 尾数箱用纸壳或其它填充物填满空间, 或将纸箱割小至刚好装下.
 7. 在搬运过程中要轻拿轻放.
 8. 在运输中不可堆放过多, 不可有重压现象.

注: 客户特殊要求请参照业务的出货资料

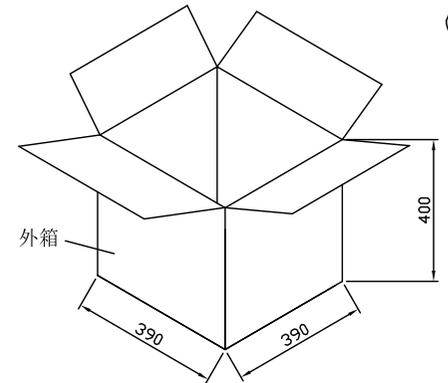

产品	RJ45立式 12.7H 带灯	1200
干燥剂	13-8010-00	2g
防水袋	15-0050-00	750*660*0.05
透明胶	13-2010-00	W=45
美纹胶	13-5010-00	宽15mm厚0.08
保护带	21-0400-00	透明色, W44*T0.4*1.2米
下带	22-0280-00	4.4mm透明色, T=0.5
上带	21-1400-00	37.5mm(自粘)
卷盘	23-1400-00	15" * 44.4mm
三角板	18-0600-00	双坑B=B 375*380*6
纸箱	16-3201-00	双坑K=A 390*390*400
品名	料号	规格(mm)
		用量(PCS)

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	<p>WanLian Technology Co., Ltd.</p>
AO	NEW RELEASE	23.06.08	LINEAR	ANGLES	APPROVED	Wang_jr	23.06.08	WLR4FO-1221A0161	ENDE05	
			0.0±0.35	X'REF±6°	DESIGNER	Ding_Bo	23.06.08	TITLE:		
			0.00±0.25	X'±3°	DRAWN	Ou_Jian	23.06.08	RJ45 8P8C V/T H12.7 包装图		
			UNIT:mm	X'±3°						REV: A0
			SIZE: A4	X'X' ±2°						SHEET: 1/1