




RoHS

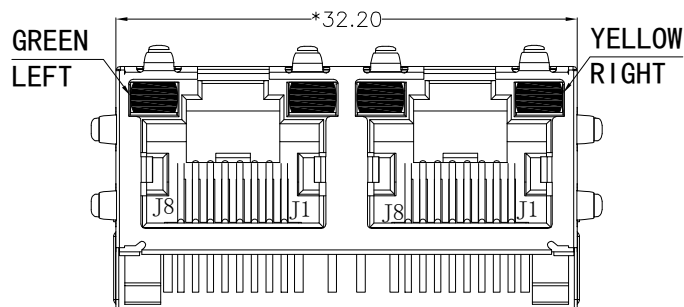


FRONT VIEW

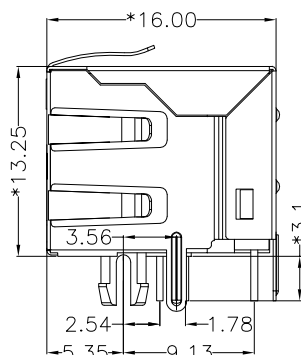


RIGHT SIDE VIEW

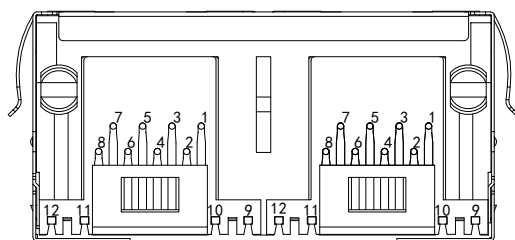

BOTTOM VIEW

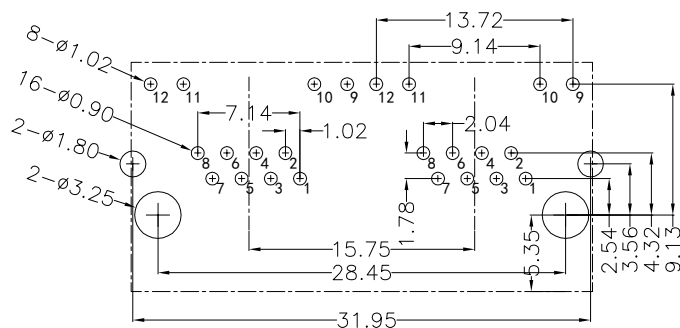


RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

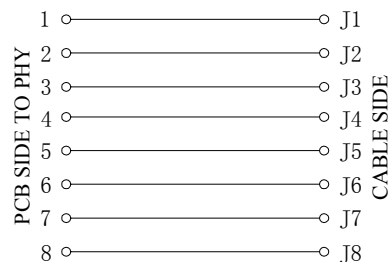

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	569nm	20mA	1.85-2.45'
Yellow	589nm	20mA	1.7-2.2V



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	21. 11. 17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	WLR4F9-1611A1095	ENDE05		
				0.0±0.35	X°REF±6°							
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE:		
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17	RJ45 1*2 56带屏蔽带灯带弹		REV: AO	SHEET: 1/1

 万连科技
Wanlian Teconology Co., Ltd

REV: A0	SHEET: 1/1
---------	------------