
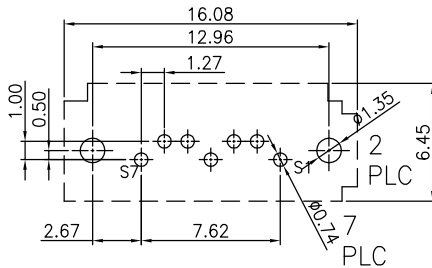

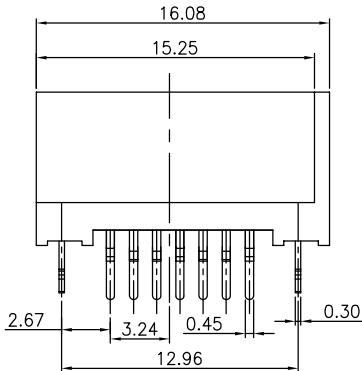
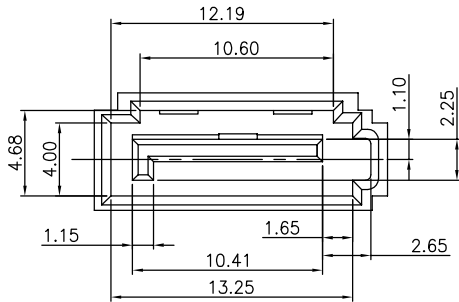


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

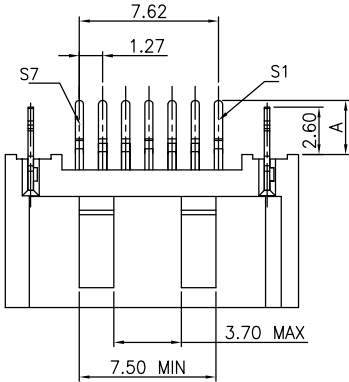

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

NOTE:
PRODUCTS MUST CONFORM TO JS SPEC JS-GC03143-A1.
1.MATERIAL:
1-1.HOUSING: LCP, UL94V-0 COLOR: BLACK
1-2.CONTACT: BRASS. T=0.25mm.
1-3.BOARDLOCK :BRASS. T=0.30mm.
2.FINISH:
2-1.CONTACT: GOLD PLATED ON CONTACT AREA
2.54μm [100μ"] MIN. TIN PLATING
ON SOLDER TAILS 1.27μm [50μ"] MIN. NICKEL
UNDERPLATING OVER ALL
2-2.BOARDLOCKS:2.54μm [100m"] MIN. TIN OVER
1.27μm [50μ"]MIN. NICKEL PLATED.
3.ELECTRICAL:
3-1.CONTACT RESISTANCE: 45 mΩ MAX.
3-2.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
3-3.CURRENT RATING: 1.5A
3-4.VOLAGE RATING: 12V AC
4.ENVIRONMENTAL:
OPERATING TEMPERATURE: -25°C TO +85°C

H	REV.		REVISION RECORD		DATE			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLSAM0-0711A0023		DWG.NO: ENDE05		 WanLian Technology Co., Ltd		H				
	AO		NEW RELEASE		22.09.15			LINEAR	ANGLES	APPROVED	Wang_jr	22.09.15											
							0.0±0.35	X°REF±6°															
							UNIT:mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.09.15	TITLE: SATA 7P VERTICAL A TYPE										
							SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.09.15											
1			2			3			4			5			6			7			8		