
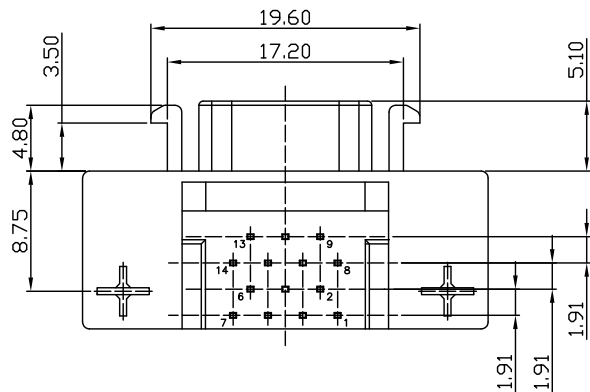

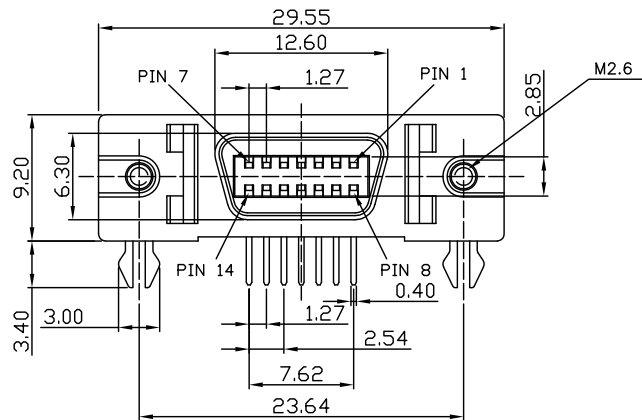
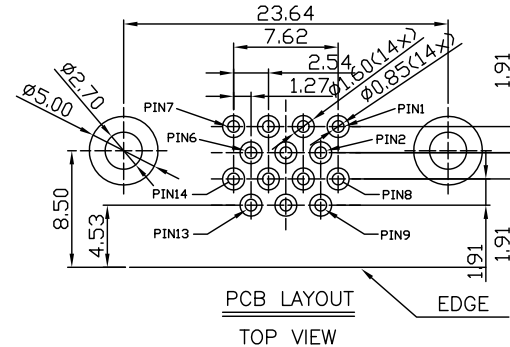


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

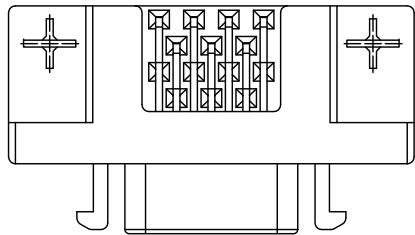

- NOTE:
- 1.MATERIAL SPECIFICATION:
1-1.HOUSING:PBT BLACK UL94V-0
1-2.COVER:LCP BLACK UL94V-0
1-3.CONTACTS:COPPER ALLOY
1-4.SHELL: ZINC ALLOY
 - 2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS AREA,
NICKEL UNDERPLATING OVER ALL.
2-2.SHELL:
NICKEL NDER PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
DURABILITY: 500 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
4-1. CURRENT RATING:1.0A
VOLTAGE RATING:40V MAX
4-2.WITHSTANDING VOLTAGE: 500V AC FOR 60S
4-3. LLCR:
VBUS & GND PINS AND OTHER PINS:
40MΩ/PIN MAX,SHIELD: 55MΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10MΩ.
4-4.INSULATION RESISTANCE: 500MΩ MIN
 - 5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+85°C.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLSCF9-1411A3013	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17			
				0.0±0.35	X°REF±6°	DESIGNER	Ou_jian	21.11.17	TITLE: SCSI CN 14P FEMALE R/A DIP		
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Hou-lanxuan		21.11.17	
				SIZE: A4	0.000±0.10	X°X' ±2°					
									REV: A0	SHEET: 1/1	