The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

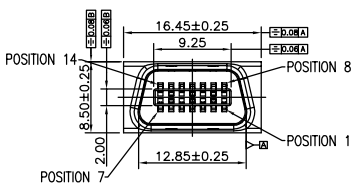



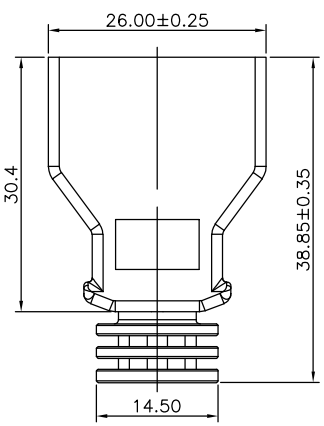





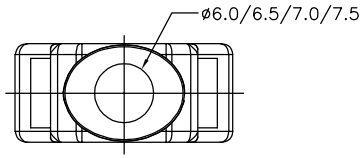

Specification:

1. Contact Resistance: 35 m Ohm Max.
2. Insulation Resistance: 200 M Ohm Min. At 500V DC.
3. Contact Current Rating: 1 Amp AC/DC
3. Voltage Rating: 40V AC.
4. Withstanding Voltage: 500V AC For 1 Minute.
5. Operating Temperature: -25°c to +85°c
6. Packing: Tray

Material and Finish:

1. Insulator Material: PBT,UL94-V0,Black
2. Cover Material: PBT,UL94-V0,Black
3. Hood Plastic Material: ABS Or PBT, Black
4. Contact Material: Phosphor Bronze(C5191-EH)T=0.25
5. Contact Area Plated: Gold Flash Plated Over Nickel 50u". Solder Area Plated Tin Plated(80u" min Lead Free)
6. Up And Down Shell Material: SPCC T=0.50
7. Up And Down Shell Plated: Nickel 80u" Plated Over Cu 50u"
8. Connector Shell Material: SPCC T=0.50
9. Connector Shell Plated: Nickel Plated Over Cu 50u"
10. Hook Spring Material: Stanless Steel T=0.30





P/N:

WLSCM0-1441 X X019

DIAMETER:
1-ø6.0 2-ø6.5
3-ø7.0 4-ø7.5

TYPE:
A-FISH HOOK TYPE
B-SICKLE TYPE

Fish Hook Type(鱼钩式)





Sickle Type(镰刀式)

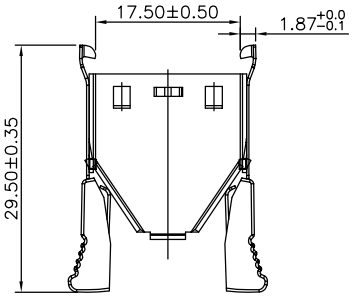

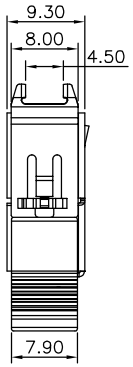

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	22.10.28

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

UNIT: mm

SIZE: A4

SCALE: 1:1	NAME	DATE
APPROVED	Wang_jr	22.10.28
CHECK	XueZe_Ma	22.10.28
DRAWN	LanXuan_Hou	22.10.28

PART.NO: WLSCM0-1441XX019

DWG.NO: ENDE05

TITLE: SCSI MDR-14P 卡钩式 四件式

万连科技 WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1