

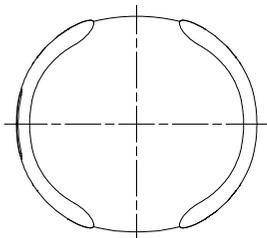






The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS


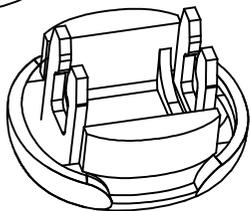


NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING:HIGH TEMPRATURE THERMOPLASTIC,UL 94V-0
 1-2.CONTACTS:COPPER ALLOY.
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 CONTACT: NI PLATING
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING:0.5A
 3-2.VOLTAGE RATING:12V MAX
 3-3.CONTACT RESISTANCE: 30m Ohm MAX.
 3-4.INSULATION RESISTANCE: 100MΩ MIN
 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
 4.ENVIRONMENTAL PERFORMANCE:
 OPERATING TEMPERATURE: -20°C~+85°C.

WLBTF0-02 5 X X 0 003
 PLATING: 7-Sn COLOUR: K:White

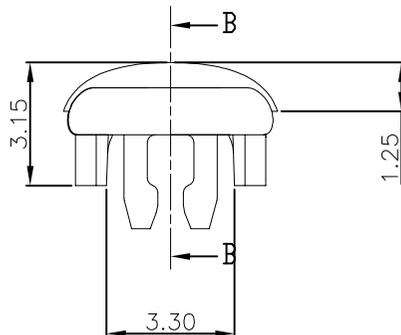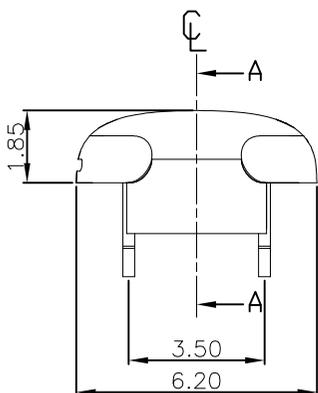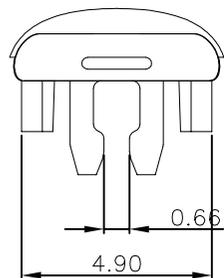

VIEW: A-A

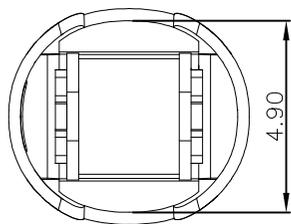

VIEW: B-B

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLBTF0-025XX0003	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
			0.0±0.35	X'REF±6°	DESIGNER	Ding_bo	21.01.13					
			UNIT:mm	0.00±0.25	X'±3'	DRAWN	Ou_jian	21.01.13				
			SIZE: A4	0.000±0.10	X'X' ±2'						REV: A0	SHEET: 1/1

万连科技

 WanLian Teconology Co., Ltd