

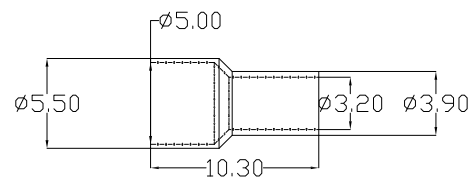
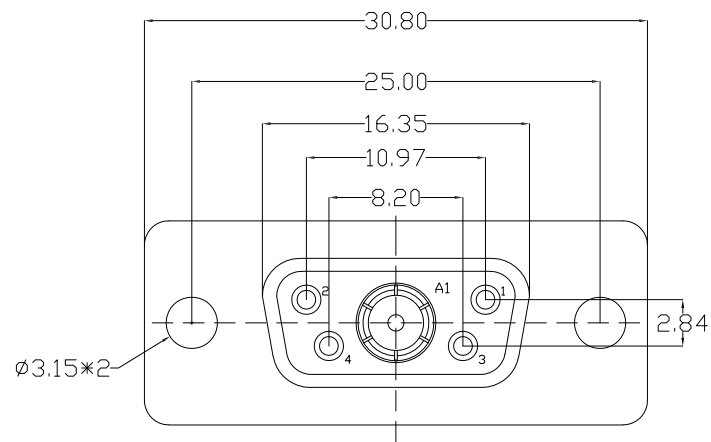


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

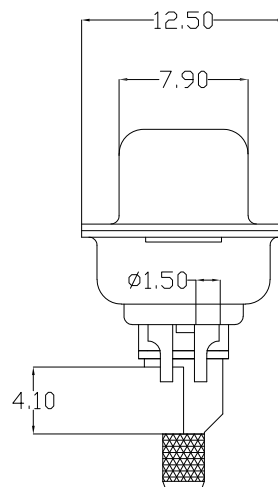

ATTACH TERMINAL SHEATH ACCORDING TO THE NUMBER OF COAXIAL TERMINALS

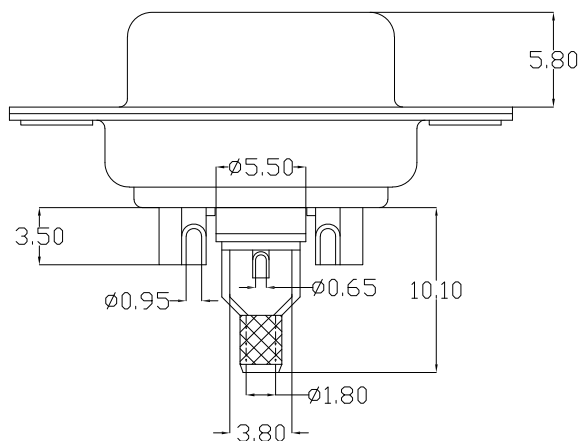

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING:PBT FIBER 30% (UL94V-0)

1-2.CONTACTS:COPPER ALLOY

1-3.SHELL: SPCC.

2.PLATING SPECIFICATION:

2-1.CONTACTS:

NI 40U" MIN. UNDER PLATED OVER ALL.

AU PLATED ON THE FUNCTIONAL AREA OF CONTACT.

2-2. SHELL:

NI 30U" MIN. UNDER PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING:3A

3-2.VOLTAGE RATING:300V AC

3-3.HIGH FREQUENCY RESISTANCE: 50 OR 75 OHM.

3-4.INSULATION RESISTANCE: 3000MΩ MIN

3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC MIN.

4.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -55°C~+105°C.

WLDBF0-054 X X 0088

PLATING:

1-G/F

2-AU 3U"

5-AU 15U"


6-AU 30U"

COLOUR:

A:Black

K:White

G:BLUE

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBF0—054XX0088	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13			
				0.0±0.35	X°REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Ding_bo	21.01.13	TITLE: D—SUB 5W1 FEMALE coaxial welding	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Ou_jian	21.01.13	REV: A0		SHEET: 1/1