


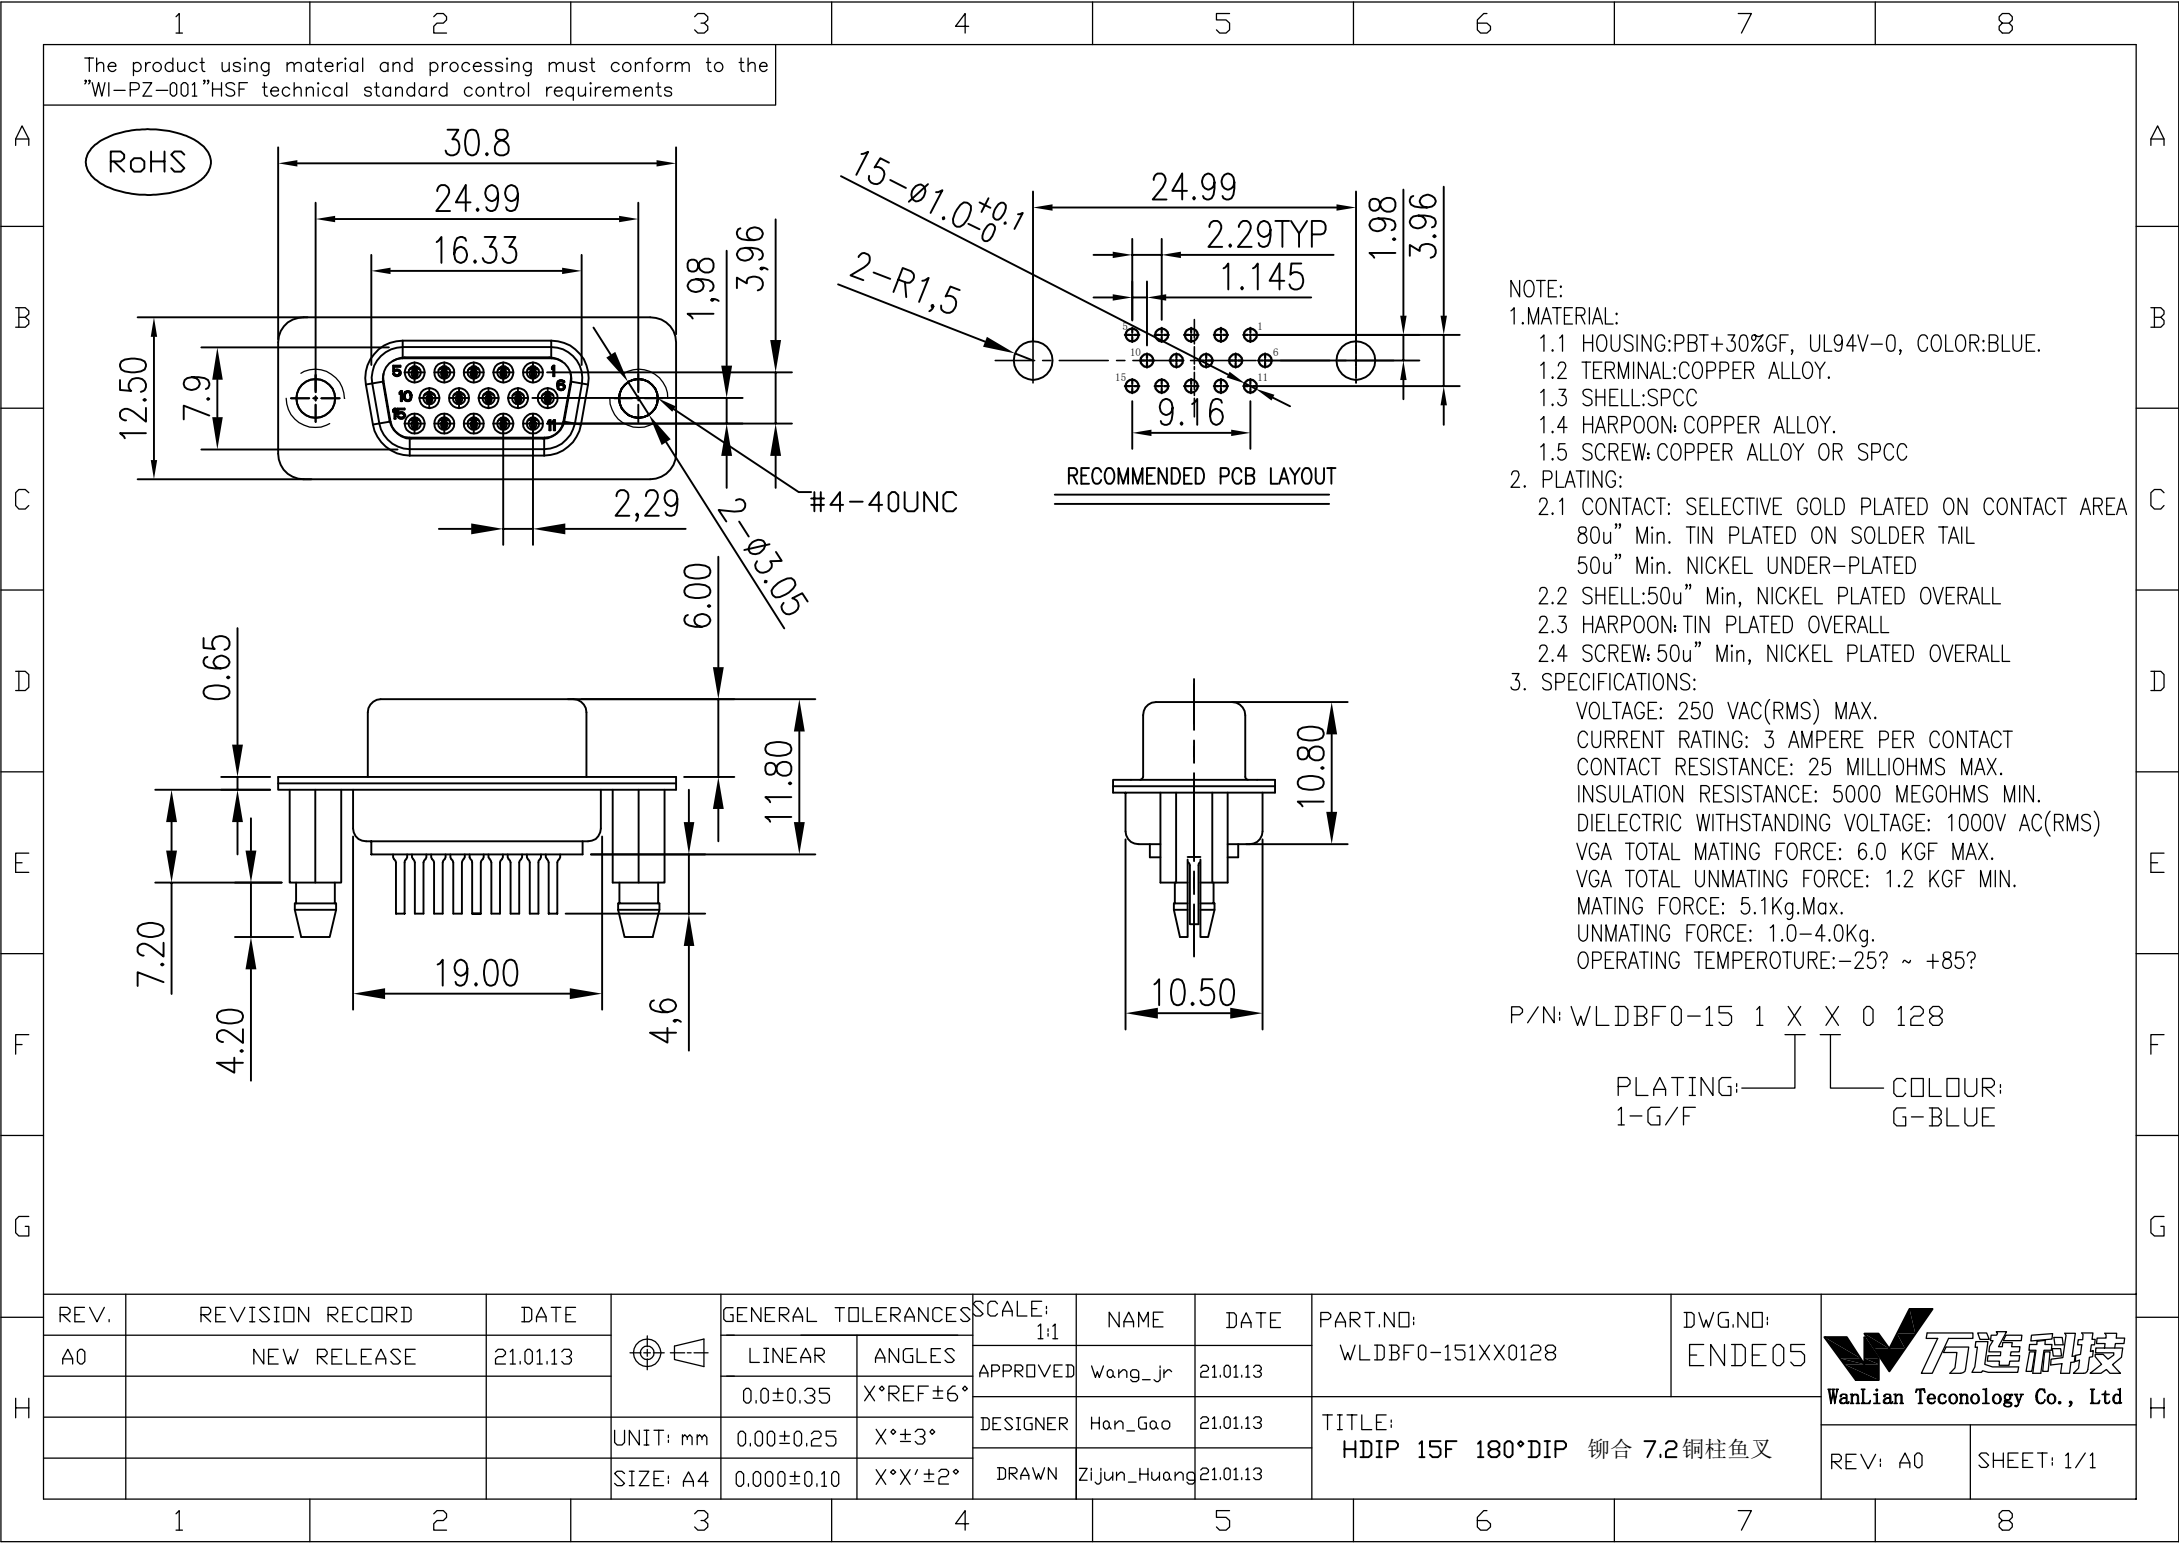

NOTE:
1. MATERIAL:
1.1 HOUSING: PBT+30%GF, UL94V-0, COLOR: BLUE.
1.2 TERMINAL: COPPER ALLOY.
1.3 SHELL: SPCC
1.4 HARPOON: COPPER ALLOY.
1.5 SCREW: COPPER ALLOY OR SPCC
2. PLATING:
2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED ON SOLDER TAIL
50u" Min. NICKEL UNDER-PLATED
2.2 SHELL: 50u" Min, NICKEL PLATED OVERALL
2.3 HARPOON: TIN PLATED OVERALL
2.4 SCREW: 50u" Min, NICKEL PLATED OVERALL
3. SPECIFICATIONS:
VOLTAGE: 250 VAC(RMS) MAX.
CURRENT RATING: 3 AMPERE PER CONTACT
CONTACT RESISTANCE: 25 MILLIOHMS MAX.
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC(RMS)
VGA TOTAL MATING FORCE: 6.0 KGF MAX.
VGA TOTAL UNMATING FORCE: 1.2 KGF MIN.
MATING FORCE: 5.1Kg.Max.
UNMATING FORCE: 1.0-4.0Kg.
OPERATING TEMPERATURE: -25? ~ +85?

P/N: WLDBF0-15 1 X X 0 128
PLATING: 1-G/F COLOUR: G-BLUE

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1					
				0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.01.13	WLDBF0-151XX0128	ENDE05	
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13			
			UNIT: mm	0.00±0.10	X°X'±2°	DRAWN	Zijun_Huang	21.01.13	TITLE: HDIP 15F 180°DIP 铆合 7.2铜柱鱼叉		
			SIZE: A4								

WanLian Teconology Co., Ltd
REV: A0 SHEET: 1/1