
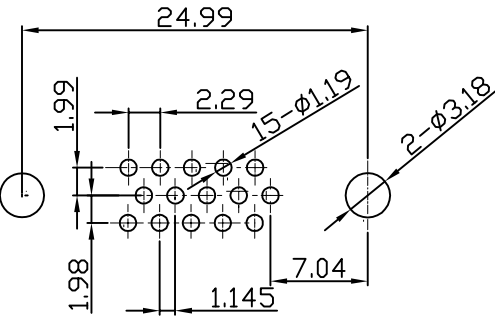


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS


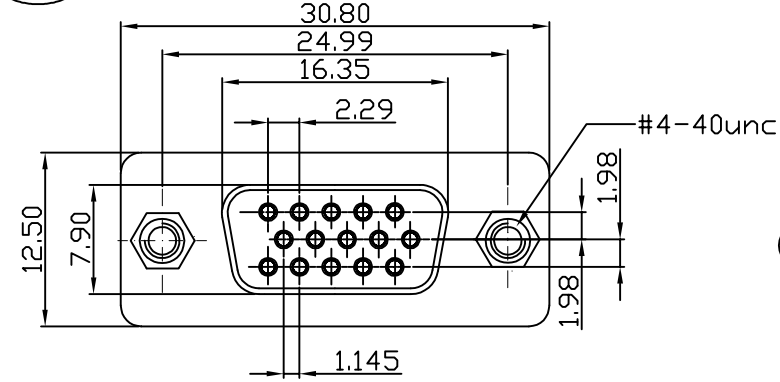


MATERIALS AND FINISH
SHELL : STEEL MATERIAL, TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, BLACK COLOR
CONTACT MATERIAL : BRASS
CONTACT FINISH : SELEVITE GOLD FINISHED
RIVETED INSERT: BRASS MATERIAL , TIN FINISHED
JACK SCREWS : BRASS MATERIAL , NICKEL FINISHED WITH #4-40 THREADED ASSEMBLED

ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C

P/N: WLDBF0-15 1 X X 0 151

PLATING: 7-Sn COLOUR: A-BLACK

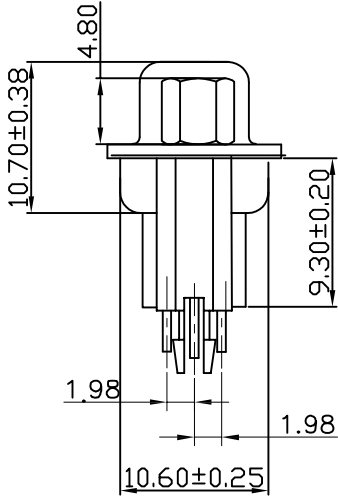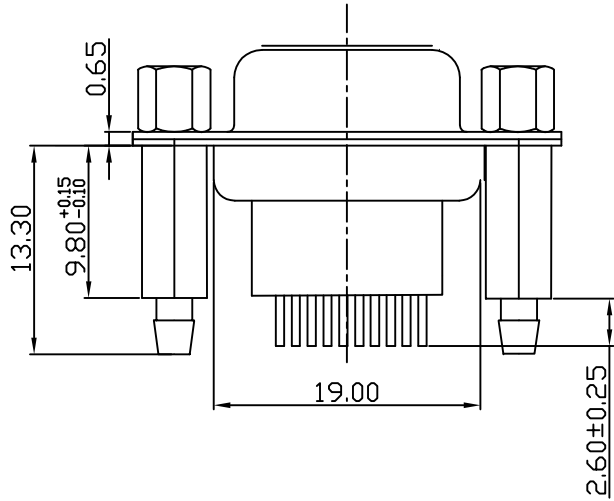

H	REV.		REVISION RECORD		DATE			GENERAL TOLERANCES		SCALE: 1:1		NAME		DATE		PART.NO:		DWG.NO:		 WanLian Teconology Co., Ltd			
	AO		NEW RELEASE		21.01.13			LINEAR		ANGLES		APPROVED		Wang_jr		21.01.13		WLDBF0-151XX0151				ENDE05	
							0.0±0.35		X°REF±6°		DESIGNER		Han_Gao		21.01.13		TITLE: HDS 15F 180°DIP Rivet Lock Copper Column 9.80		REV: AO		SHEET: 1/1		
					UNIT:mm		0.00±0.25		X°±3°														
					SIZE: A4		0.000±0.10		X°X' ±2°		DRAWN		Zijun_Huang		21.01.13								
1			2			3			4			5			6			7			8		