



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

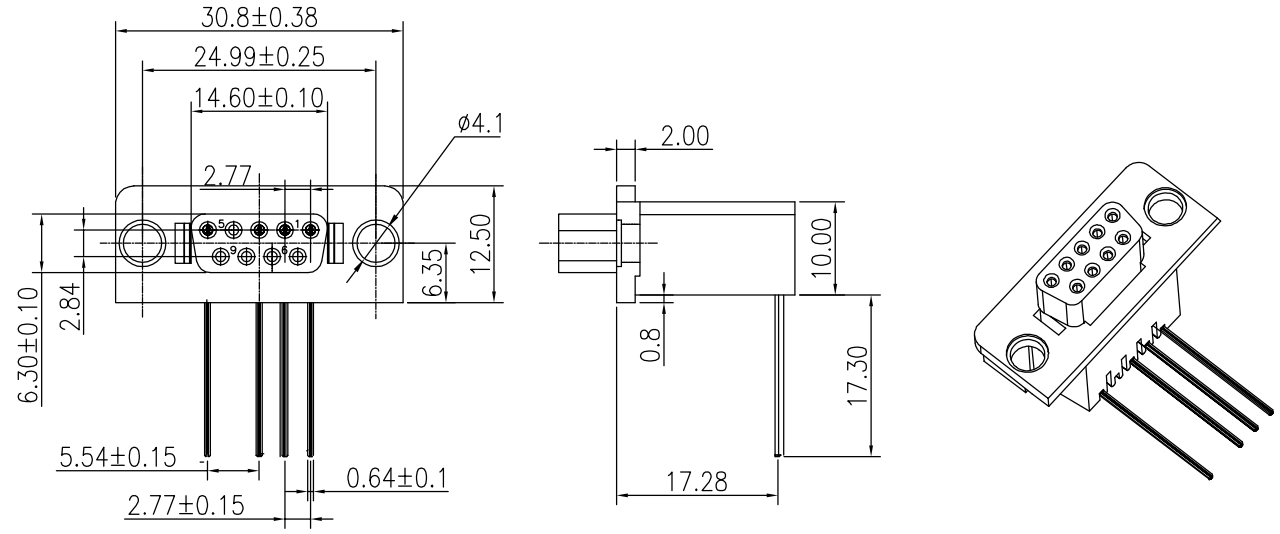

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PBT BLACK.
1-2.CONTACTS: COPPER ALLOY
2.PLATING:
2-1.CONTACT:
SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED OVERALL
50u" Min. NICKEL UNDER-PLATED
3.MECHANICAL PERFORMANCE:
3-1.MATING FORCE: 5.1Kg.Max.
3-2.UNMATING FORCE: 1.0~4.0Kg.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 3A
4-2.VOLTAGE RATING: 250V MAX
4-3.CONTACT RESISTANCE: 25mΩ Max.
4-4.INSULATION RESISTANCE: 5000MΩ MIN
4-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC Min
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6.P/N ORDER:

WLDBF9-09 1 X X 0 103
PLATING: 1-G/F 7-Sn COLOUR: A-BLACK

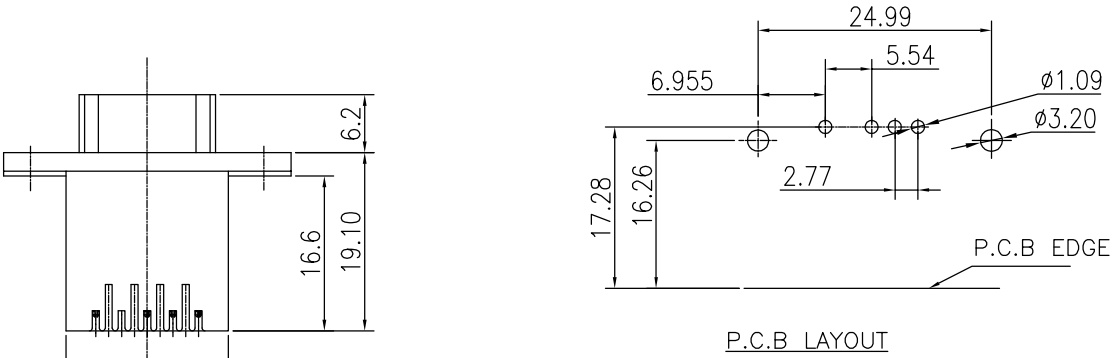

H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBF9-091XX0103	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd			
	A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13						
					0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: DR 9F 90° DIP 高架	REV: A0			SHEET: 1/1	
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.01.13						
				SIZE: A4	0.000±0.10	X°X' ±2°									
1		2		3		4		5		6		7		8	