
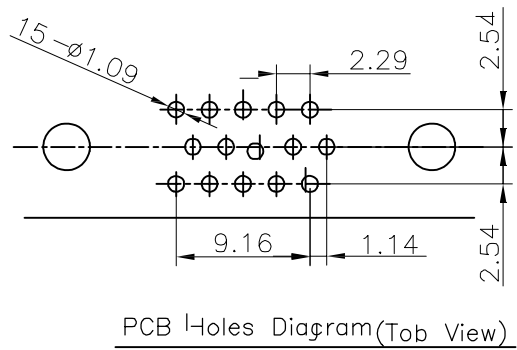




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

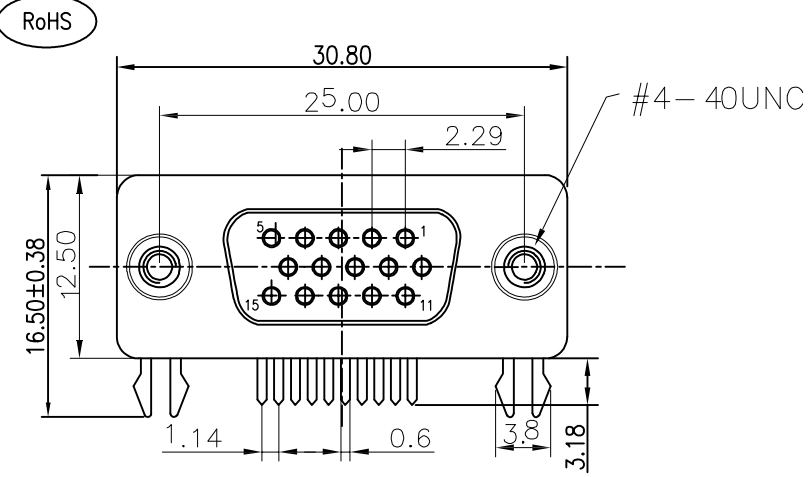

- NOTE:
- 1.MATERIAL:
 - 1.1 HOUSING:PBT+30%GF, UL94V-0, COLOR:BLACK
 - 1.2 TERMINAL:COPPER ALLOY.
 - 1.3 SHELL:SPCC
 - 1.4 RIVET:COPPER ALLOY.
 - 1.5 HARPOON:SPCC
 - 2. PLATING:
 - 2.1 CONTACT: 80u" Min.MATTE TIN NICKEL PLATED OVERALL 50u" Min. NICKEL UNDER-PLATED
 - 2.2 SHELL:50u" Min, NICKEL PLATED OVERALL
 - 2.3 HARPOON:50u" Min, TIN PLATED OVERALL.
 - 2.4 SCREW:50u" Min, NICKEL PLATED OVERALL.
 - 3. SPECIFICATIONS:
 - VOLTAGE: 250 VAC(RMS) MAX.
 - CURRENT RATING: 3 AMPERE PER CONTACT
 - CONTACT RESISTANCE: 25 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)
 - MATING FORCE: 5.1Kg.Max.
 - UNMATING FORCE: 1.0Kg.MIN
 - OPERATING TEMPEROTURE:-25? ~ +85?

P/N: WLDBF9-15 1 X X 0 140

PLATING: 7-Sn COLOUR: A-BLACK

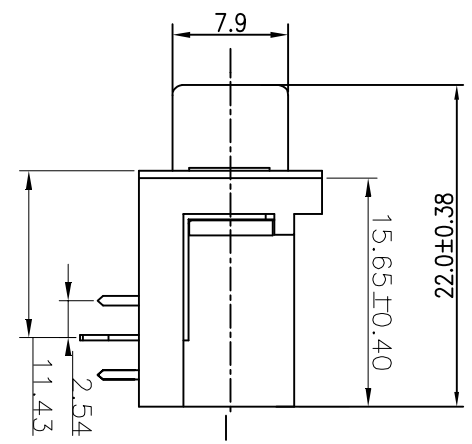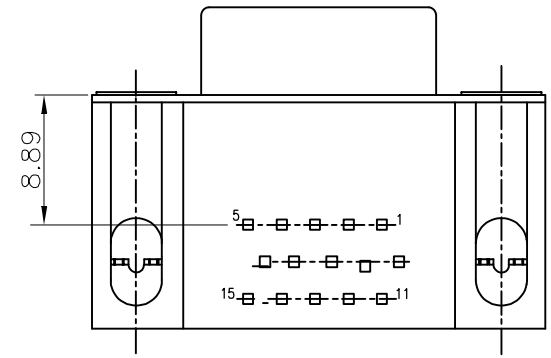

H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBF9-151XX0140	DWG.NO: ENDE05				
	A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13						
					0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE:					
				UNIT:mm	0.00±0.25	X*±3°	DRAWN	Zijun_Huang	21.01.13	HDR8.89 15F 90°DIP 铆合		REV: A0	SHEET: 1/1		
				SIZE: A4	0.000±0.10	X*X' ±2°									
1		2		3		4		5		6		7		8	