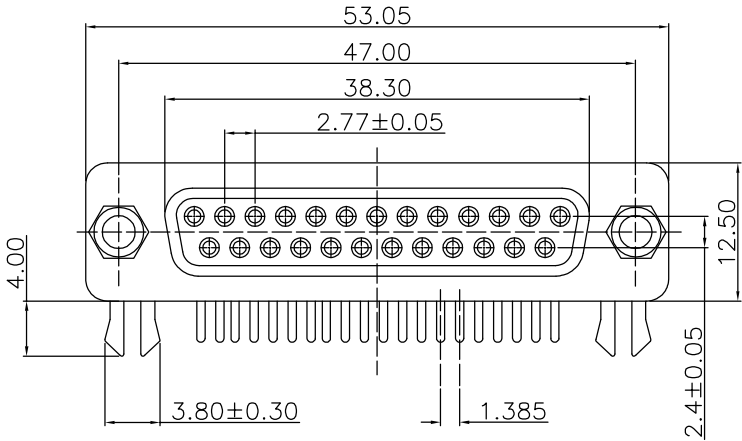
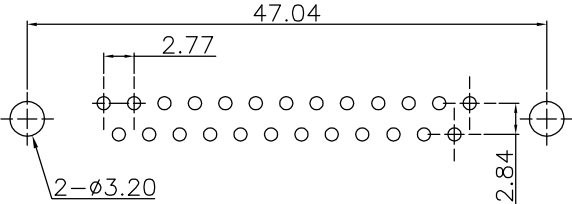
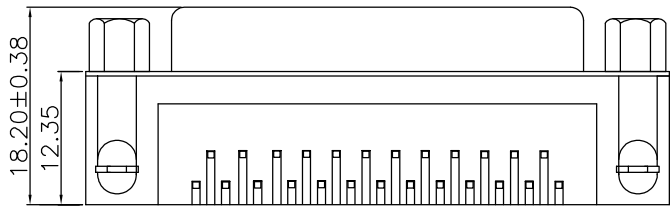
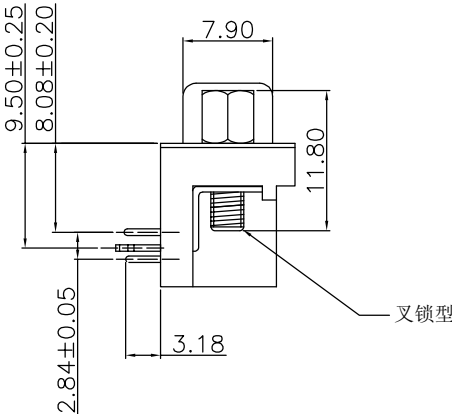


1	2	3	4	5	6	7	8
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements							
RoHS							
					NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: PBT BLACK 1-2.TERMINAL: COPPER ALLOY 1-3.SHELL:SPCC 1-4.SCREW:SPCC 1-5.GROUND HARPOON:SPCC 2.PLATING: 2-1.CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA 80u" Min. TIN PLATED OVERALL 50u" Min. NICKEL UNDER-PLATED 2-2.SHELL: 50u" Min. NICKEL PLATED OVERALL 2-3.SCREW: NICKEL PLATED OVERALL 2-4.GROUNDING HARPOON: TIN PLATED OVERALL 3.ELECTRICAL PERFORMANCE: 3-1.CURRENT RATING: 3A 3-2.VOLTAGE RATING: 250V MAX 3-3.CONTACT RESISTANCE: 25mΩ Max. 3-4.INSULATION RESISTANCE: 5000MΩ MIN 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC Min 4.ENVIRONMENTAL PERFORMANCE: OPERATING TEMPERATURE: -55°C~+105°C. 5.P/N ORDER: WLDBF9-25 1 X X 0 114 PLATING: 1-G/F 7-SN COLOUR: A-BLACK		
							
			</				

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PBT BLACK

1-2.TERMINAL: COPPER ALLOY

1-3.SHELL:SPCC

1-4.SCREW:SPCC

1-5.GROUND HARPOON:SPCC

2.PLATING:

2-1.CONTACT:

SELECTIVE GOLD PLATED ON CONTACT AREA

80u" Min. TIN PLATED OVERALL

50u" Min. NICKEL UNDER-PLATED

2-2.SHELL: 50u" Min. NICKEL PLATED OVERALL

2-3.SCREW: NICKEL PLATED OVERALL

2-4.GROUNDING HARPOON: TIN PLATED OVERALL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 3A

3-2.VOLTAGE RATING: 250V MAX

3-3.CONTACT RESISTANCE: 25mΩ Max.

3-4.INSULATION RESISTANCE: 5000MΩ MIN

3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC Min

4.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -55°C~+105°C.

5.P/N ORDER:

WLDBF9-25 1 X X 0 114

PLATING: 1-G/F 7-SN

COLOUR: A-BLACK

叉锁型