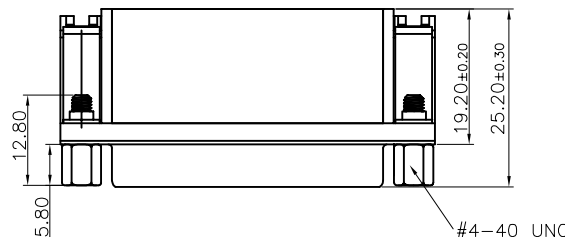
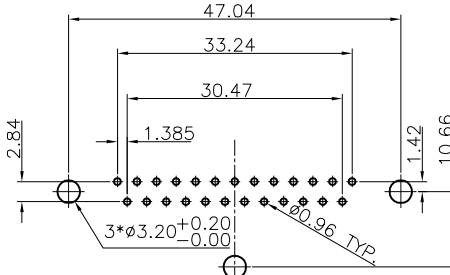
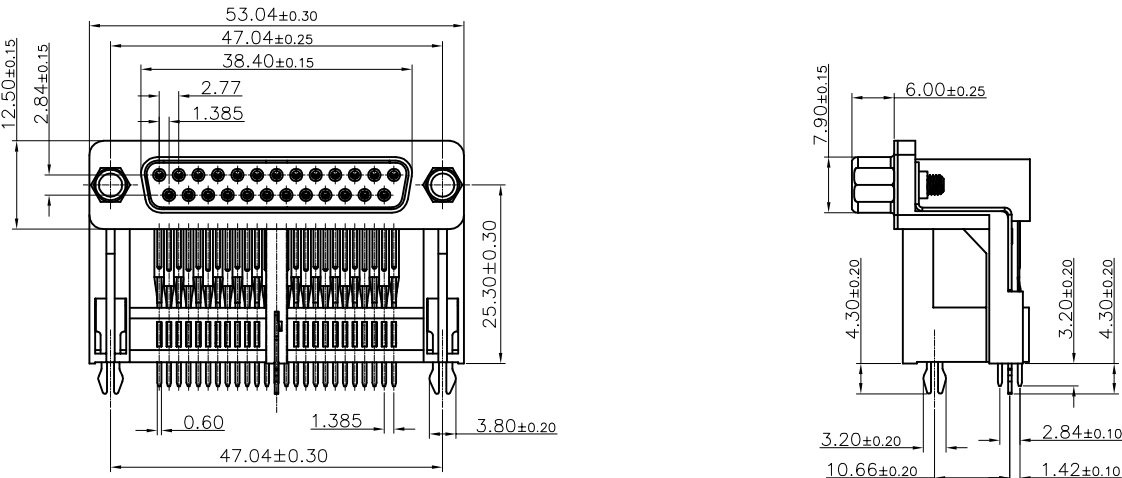


1	2	3	4	5	6	7	8						
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements													
A	RoHS 		 P.C.B. LAYOUT(TOP VIEW)		 SCALE: 1:2			A					
B	NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: NYLON UL94V-0 1-2.CAP: PBT+30%G/F UL94V-0 1-3.CONTACTS: BRASS C2680R-EH 1-4.SHELL: SPCC 1-5.BOARD LOCK: SPCC 1-6.BOARD LOCK-M: SPCC 1-7.SCREW: Fe 2.PLATING: 2-1.CONTACT: SELECTIVE GOLD PLATING ON CONTACT AREA, MATTE TIN PLATED ON SOLDER TAILS NICKEL PLATED UNDER OVERALL. 2-2.SHELL: NICKEL PLATED OVERALL 2-3.BOARD LOCK: NICKEL PLATING OVER COPPER 2-4.SCREW: NICKEL PLATED OVERALL 3.ELECTRICAL PERFORMANCE: 3-1.CURRENT RATING: 3A 3-2.VOLTAGE RATING: 250V MAX 3-3.CONTACT RESISTANCE: 30mΩ Max. 3-4.INSULATION RESISTANCE: 1000MΩ MIN 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC Min 4.ENVIRONMENTAL PERFORMANCE: OPERATING TEMPERATURE: -25°C~+85°C. 5.P/N ORDER: WLDBF9-25 1 X X 0 120 PLATING: 7-SN COLOUR: H.PURPLE							B					
C								C					
D								D					
E								E					
F								F					
G								G					
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
	A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLDBF9-251XX0120	ENDE05		
				UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: DR HIGH 25F 90°DIP		REV: A0	SHEET: 1/1
					0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.01.13				
	1	2	3		4	5	6	7	8				