

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance: 1000 Megohms Minimum.at DC 500V.
Contact Resistance: 25 Milliohms Maximum.
Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 341 g.Maximum.
Contact Separation Force: 21 g.Minimum.

MATERIALS:

Contacts: Brass.





Insulator: PBT Or High Temperature Plastic
Color: Top port black below port blue
UL 94V-0 Rated.

Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash Or Full Gold.
Shell: Tin Or Nickel Plated.

PACKAGE SPEC: TRAY

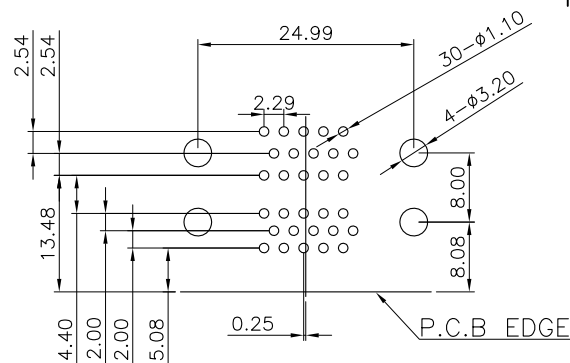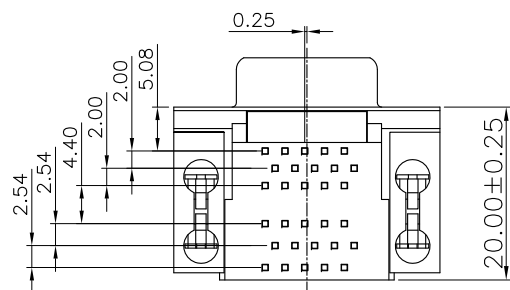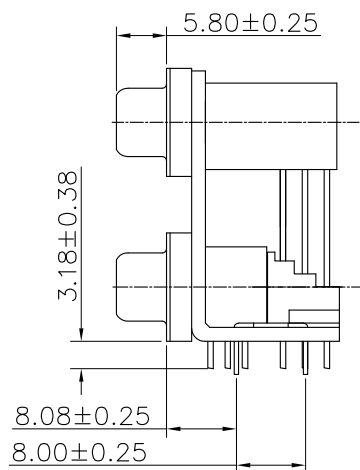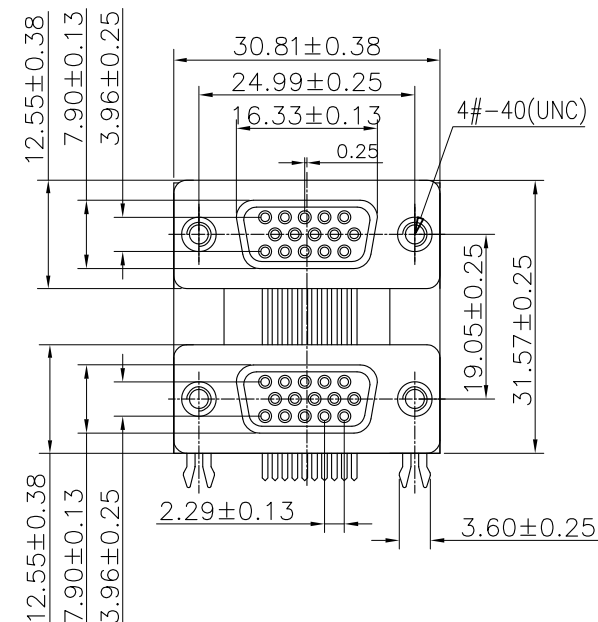

WLDBF9-30 1 X X 0003

PLATING: _____ COLOUR: _____
SPECIFICATION: A:BLACK
1-G/F K:WHITE
2-AU 3U" G:BLUE
5-AU 15U"
6-AU 30U"

RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(L)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBF9-301XX0003	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X°REF±6°							
			UNIT: mm	0.00±0.25	X°±3°	DESIGNER	Ding_bo	21.01.13	TITLE: HDR DOUBLE 15P/F 5.08MM			
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Ou_jian		21.01.13		
											REV: A0	SHEET: 1/1