


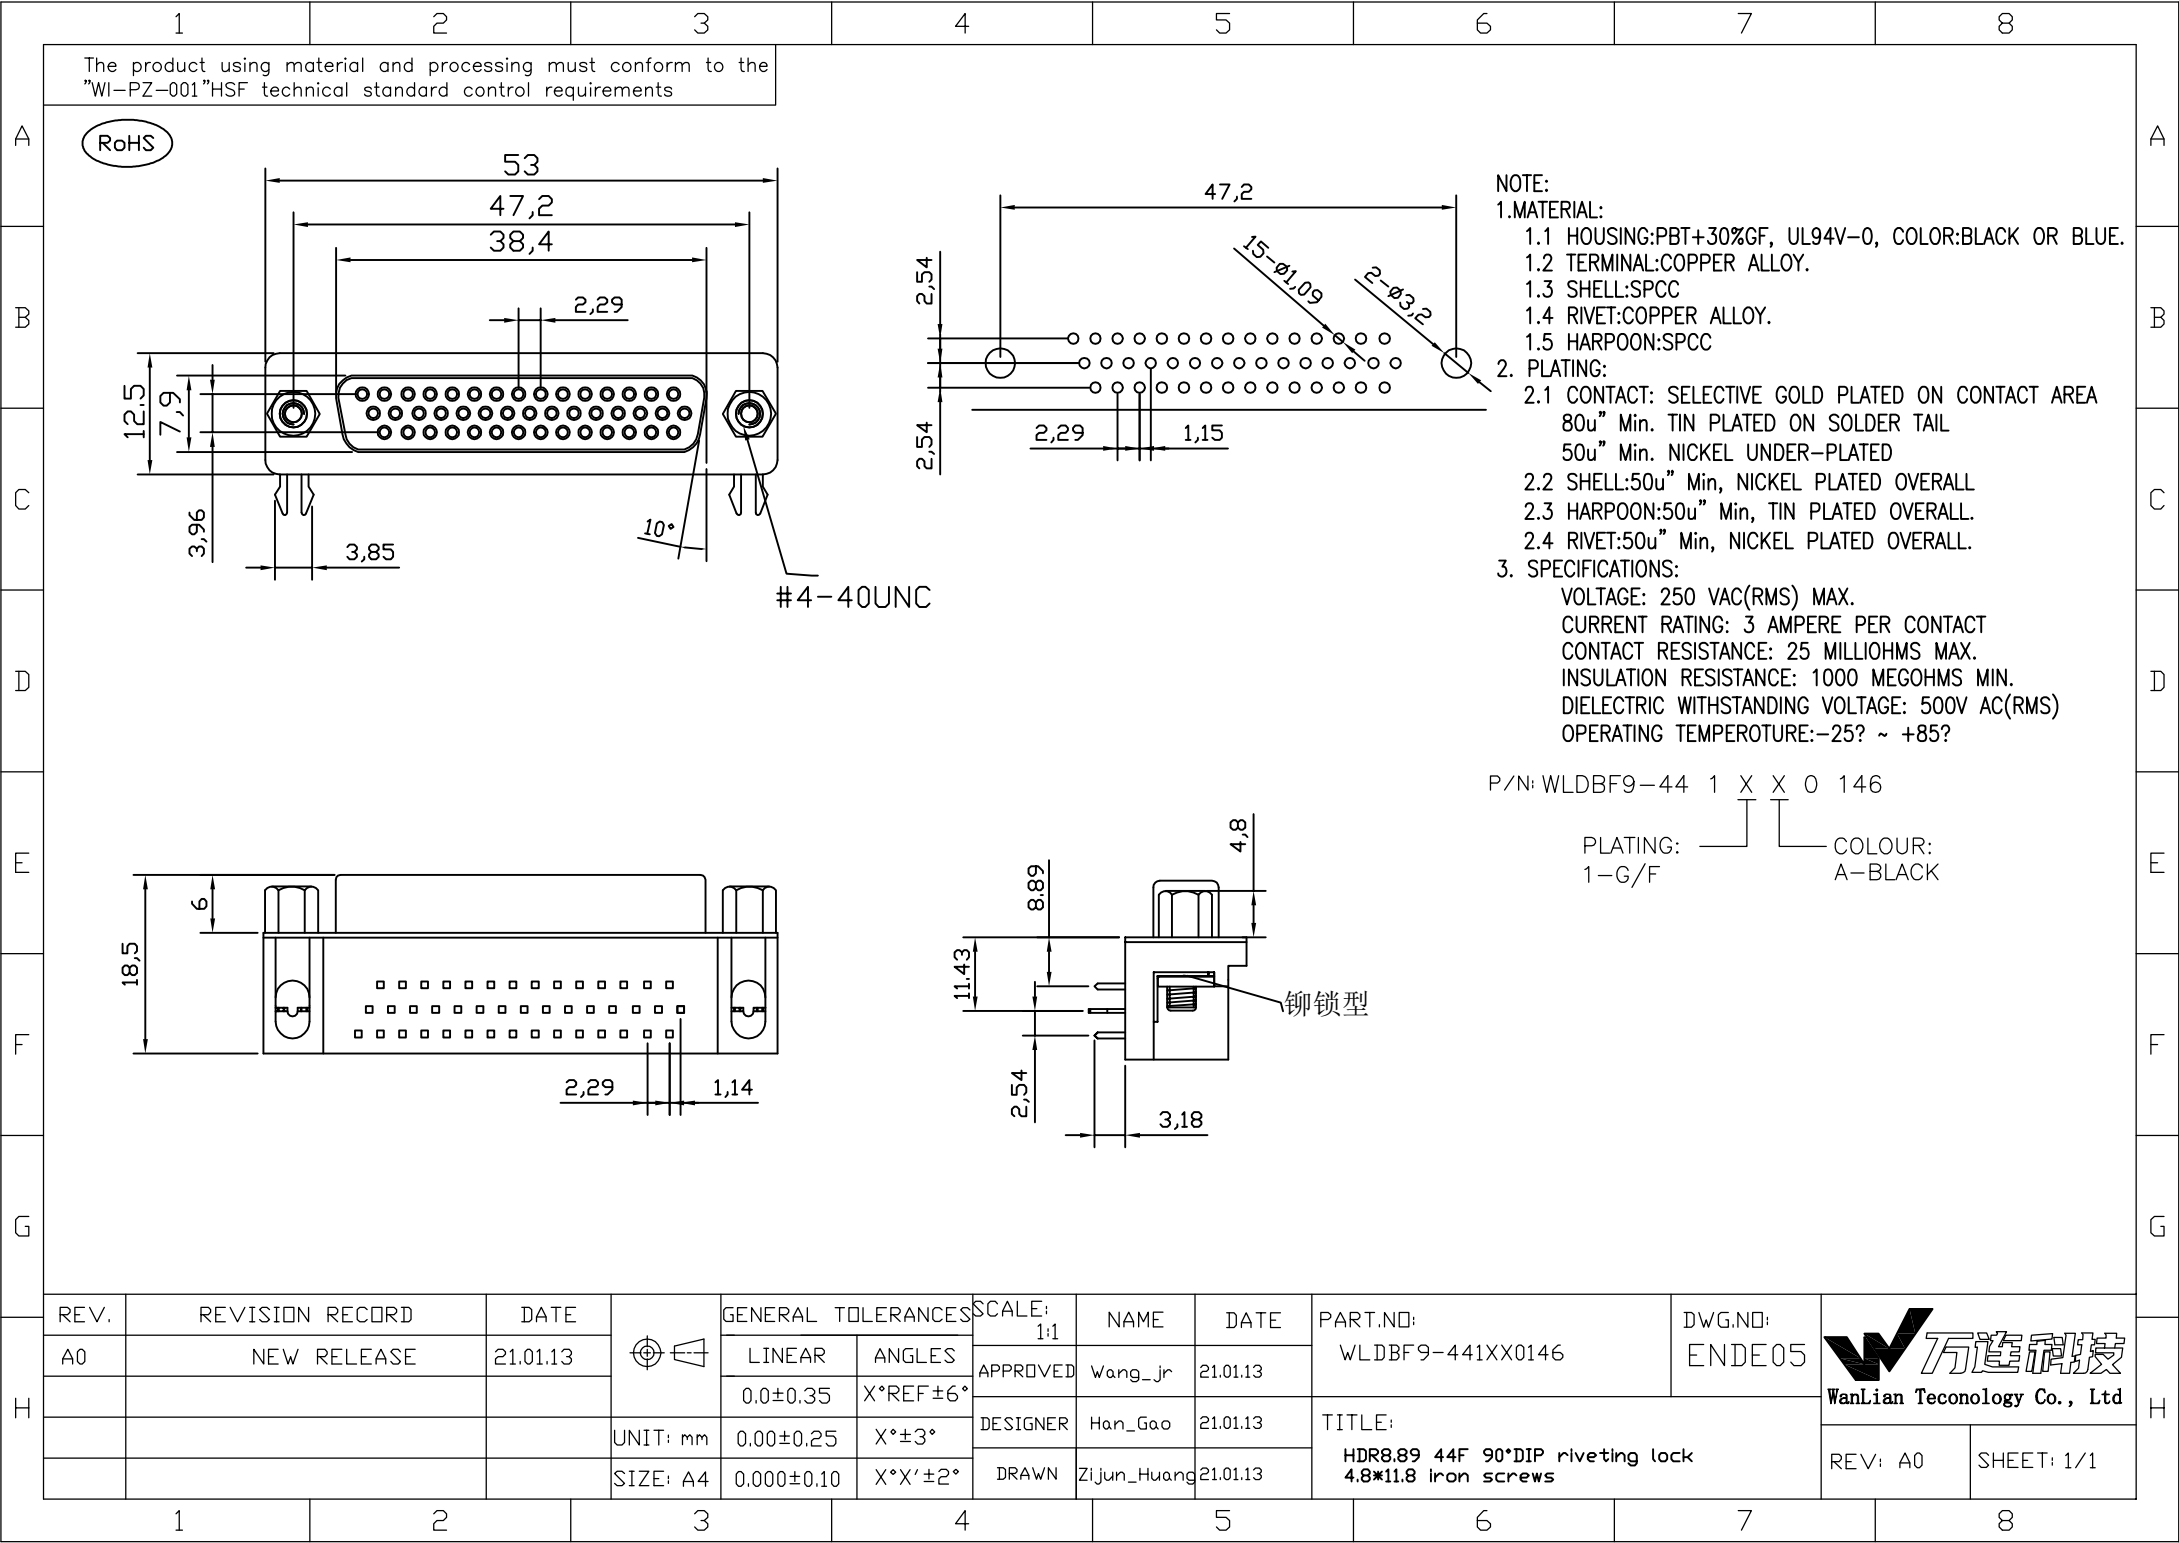

NOTE:
1. MATERIAL:
1.1 HOUSING: PBT+30%GF, UL94V-0, COLOR: BLACK OR BLUE.
1.2 TERMINAL: COPPER ALLOY.
1.3 SHELL: SPCC
1.4 RIVET: COPPER ALLOY.
1.5 HARPOON: SPCC
2. PLATING:
2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED ON SOLDER TAIL
50u" Min. NICKEL UNDER-PLATED
2.2 SHELL: 50u" Min, NICKEL PLATED OVERALL
2.3 HARPOON: 50u" Min, TIN PLATED OVERALL.
2.4 RIVET: 50u" Min, NICKEL PLATED OVERALL.
3. SPECIFICATIONS:
VOLTAGE: 250 VAC(RMS) MAX.
CURRENT RATING: 3 AMPERE PER CONTACT
CONTACT RESISTANCE: 25 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)
OPERATING TEMPERATURE: -25? ~ +85?

P/N: WLDBF9-44 1 X X 0 146

PLATING: 1-G/F COLOUR: A-BLACK

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.01.13	WLDBF9-441XX0146	
				0.0±0.35	X°REF±6°		DESIGNER	Han_Gao	21.01.13		
				0.00±0.25	X°±3°		DRAWN	Zijun_Huang	21.01.13		
			UNIT: mm	0.00±0.10	X°X'±2°						
			SIZE: A4								

TITLE:
HDR8.89 44F 90°DIP riveting lock
4.8*11.8 Iron screws

REV: A0 SHEET: 1/1