
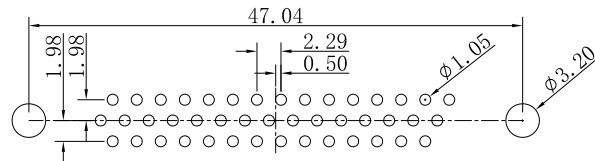
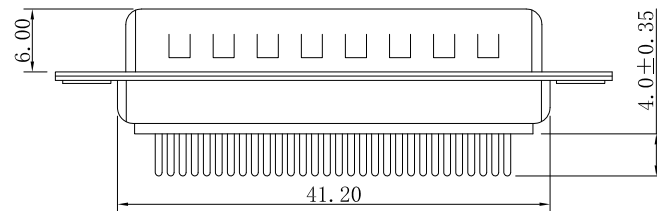


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS



PCB layout

CHARACTERISTICS:

- 1、RATED VOLTAGE: 250V AC CD
- 2、RATED CURRENT: 3.0AMP
- 3、CONTACT RESISTANCE: 30mΩ Max.
- 4、INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- 5、Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、Operating temperature: -55℃~105℃
- 7、INSERTION/EXTRACTION FORCE PER CONTACT: 9.08Kg Max
0.78Kg Min.

ORDER INFORMATION

P/N:WLDBM0-441XXX056

Number of Contact

Contact Type
1: DIP

Plating Contact
1: Gold Flash
3: Au: 3U"
6: Au: 30U"

SCREW

A: Specification Type A
B: Specification Type B
C: Specification Type C
D: Specification Type D

Housing color
A: Black
S: Nature

Specification Type			
A	B	C	D

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: WLDBM0-441XXX056	DWG. NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21. 01. 13		LINEAR	ANGLES	APPROVED	Wang_jr	21. 03. 11			
				0. 0±0. 35	X° REF±6°	DESIGNER	Ding_Bo	21. 03. 11	TITLE: HDP 44M DIP		
				UNIT: mm	0. 00±0. 25	X° ±3°	DRAWN	Ou_Jian		21. 03. 11	
			SIZE: A4	0. 000±0. 10	X° X'±2°					REV: A0	SHEET: 1/1