


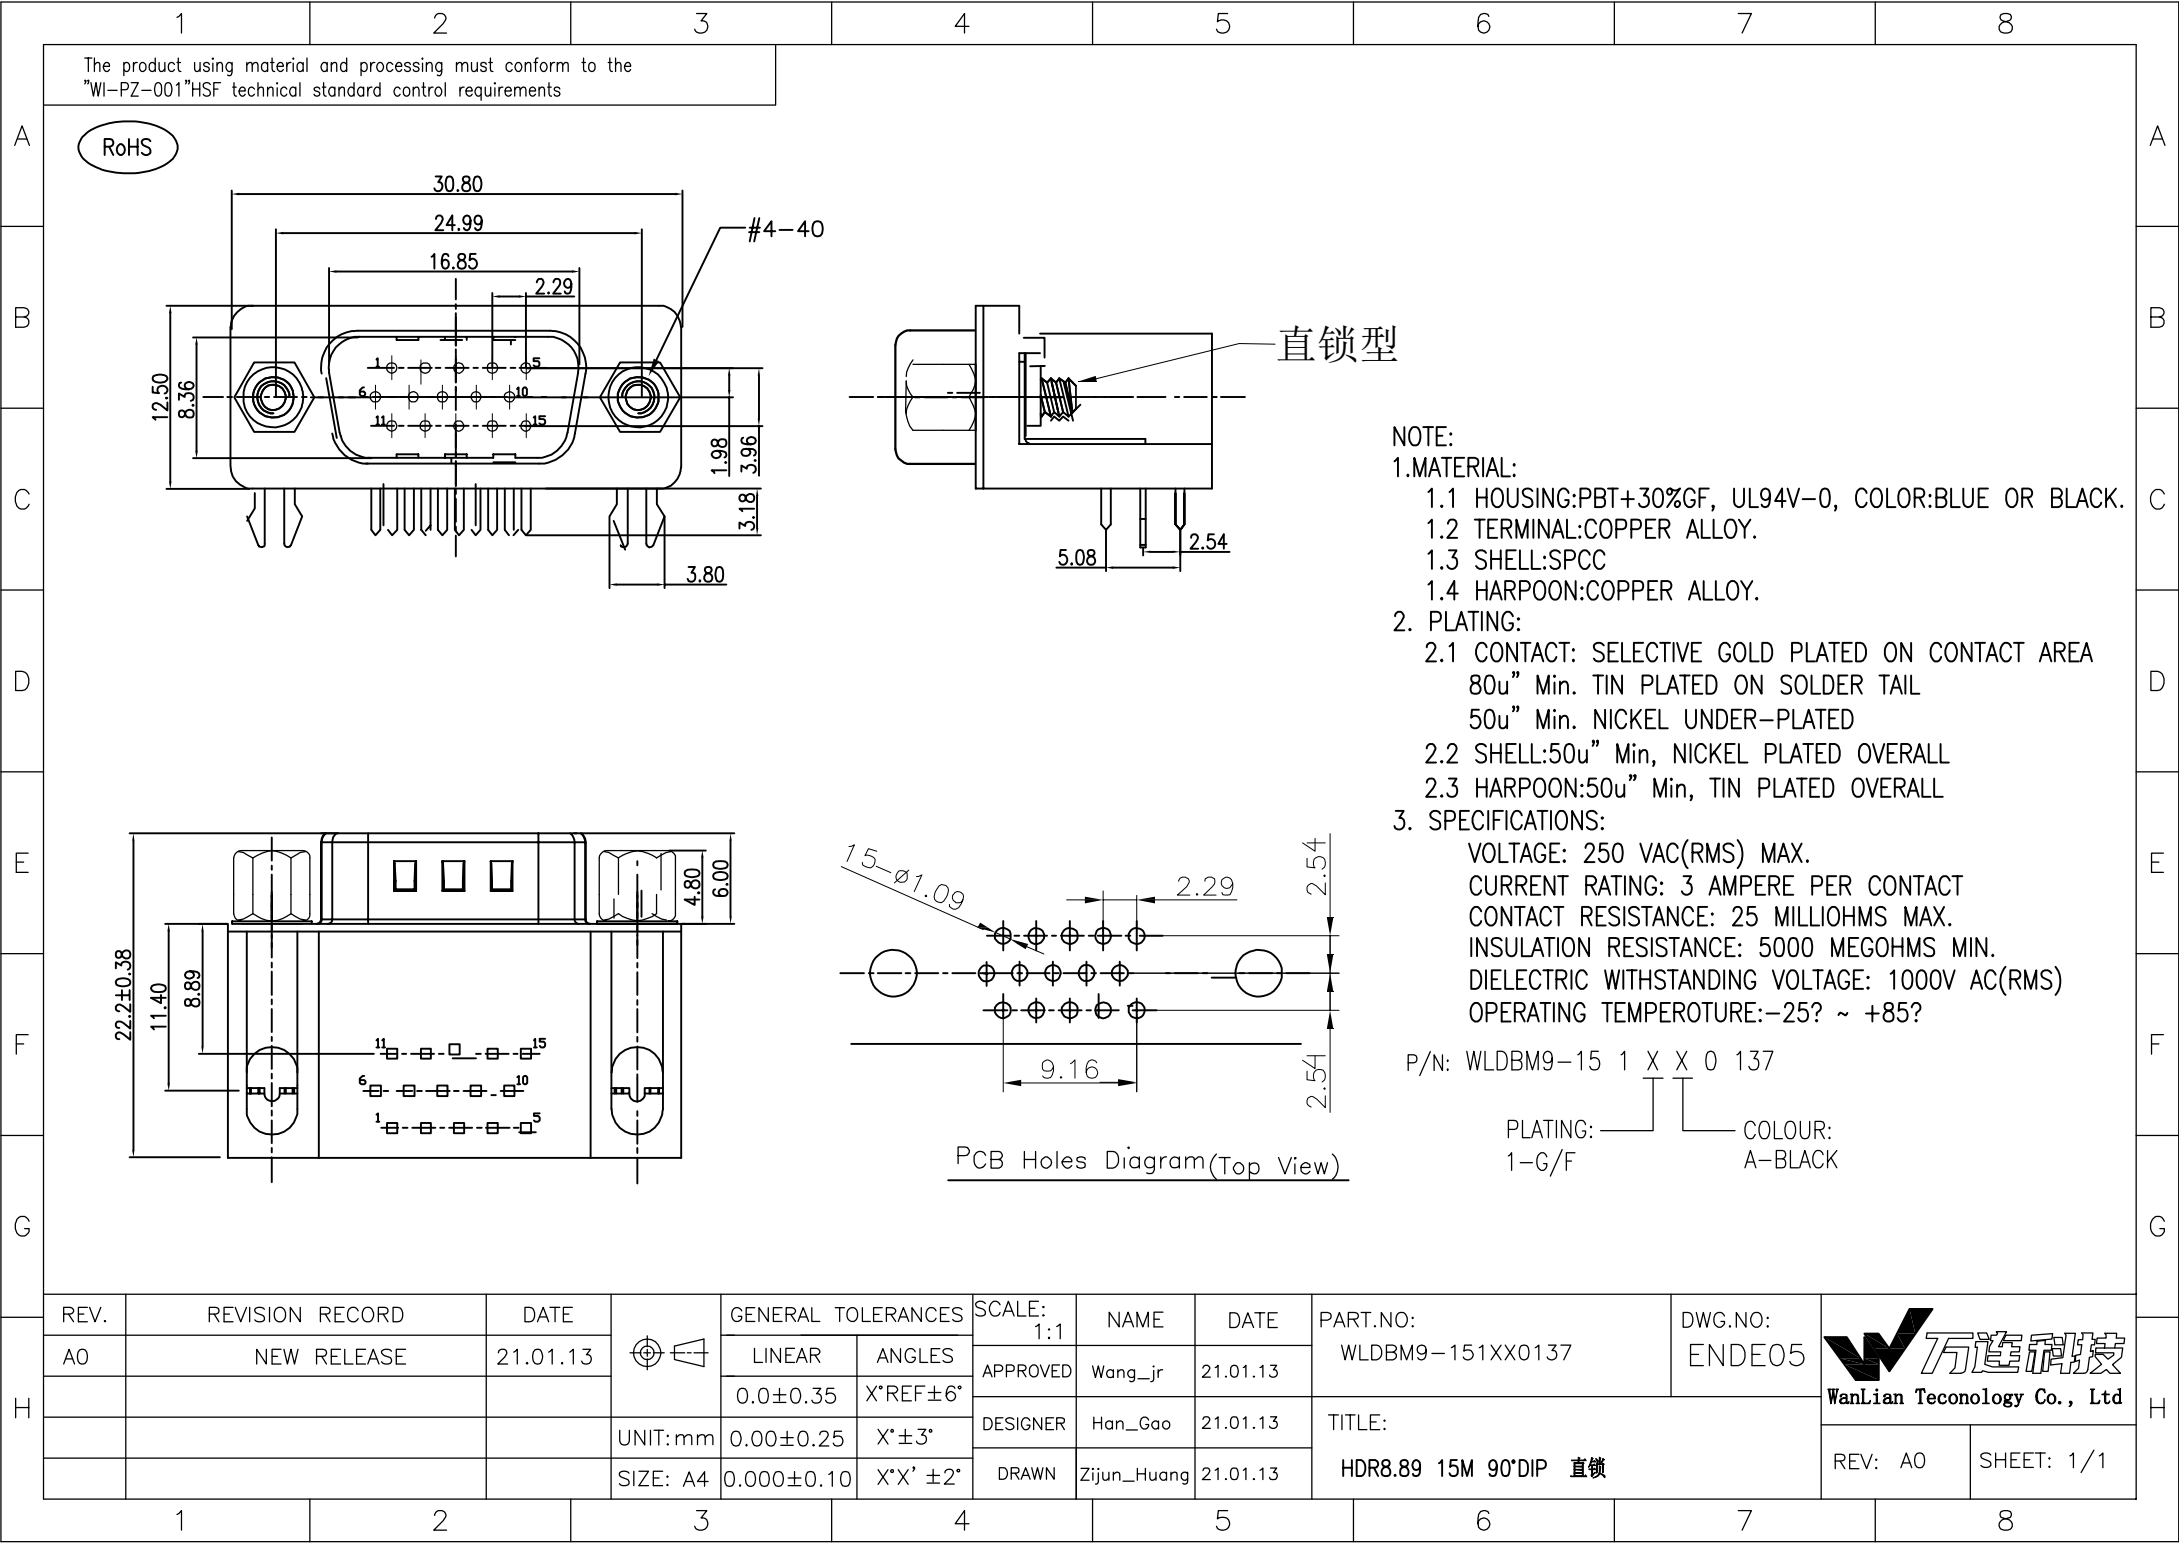

RoHS

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

NOTE:
1.MATERIAL:
1.1 HOUSING:PBT+30%GF, UL94V-0, COLOR:BLUE OR BLACK.
1.2 TERMINAL:COPPER ALLOY.
1.3 SHELL:SPCC
1.4 HARPOON:COPPER ALLOY.
2. PLATING:
2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA 80u" Min. TIN PLATED ON SOLDER TAIL 50u" Min. NICKEL UNDER-PLATED
2.2 SHELL:50u" Min, NICKEL PLATED OVERALL
2.3 HARPOON:50u" Min, TIN PLATED OVERALL
3. SPECIFICATIONS:
VOLTAGE: 250 VAC(RMS) MAX.
CURRENT RATING: 3 AMPERE PER CONTACT
CONTACT RESISTANCE: 25 MILLIOHMS MAX.
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC(RMS)
OPERATING TEMPEROTURE:-25? ~ +85?

P/N: WLDBM9-15 1 X X 0 137
PLATING: 1-G/F COLOUR: A-BLACK

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBM9-151XX0137	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13			
				0.0±0.35	X*REF±6°						
			UNIT:mm	0.00±0.25	X*±3°	DESIGNER	Han_Gao	21.01.13	TITLE: HDR8.89 15M 90°DIP 直锁		
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	Zijun_Huang	21.01.13			
									REV: A0	SHEET: 1/1	