


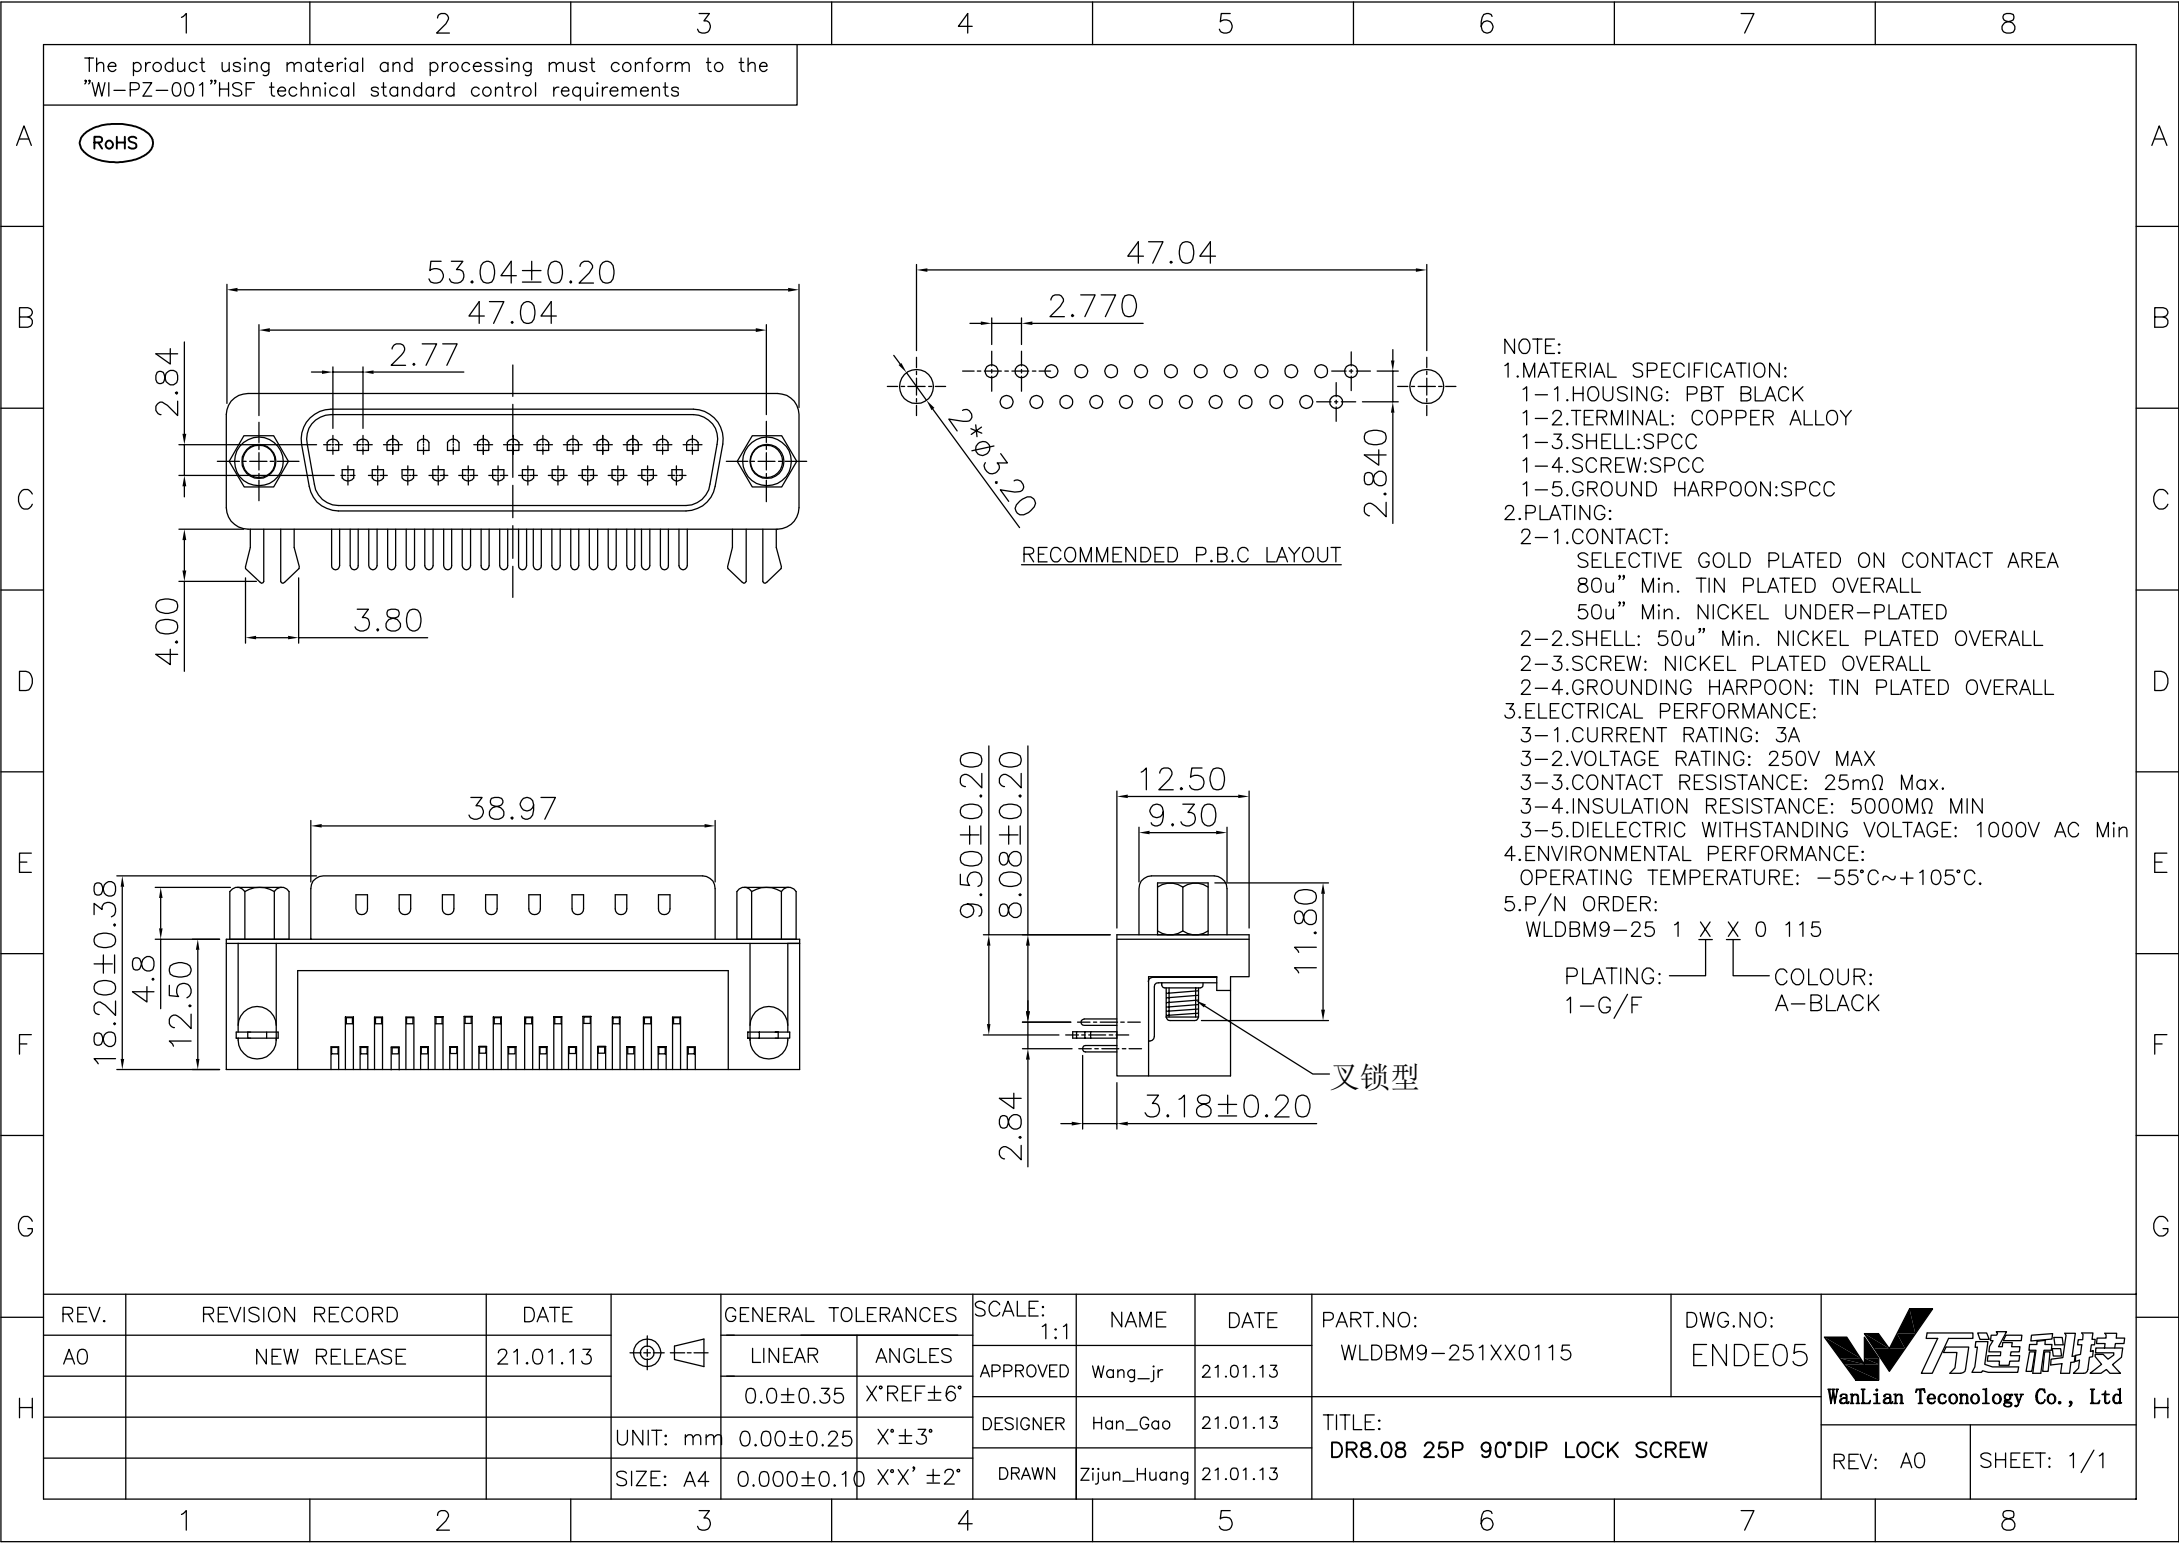

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PBT BLACK
1-2.TERMINAL: COPPER ALLOY
1-3.SHELL:SPCC
1-4.SCREW:SPCC
1-5.GROUND HARPOON:SPCC
2.PLATING:
2-1.CONTACT:
SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED OVERALL
50u" Min. NICKEL UNDER-PLATED
2-2.SHELL: 50u" Min. NICKEL PLATED OVERALL
2-3.SCREW: NICKEL PLATED OVERALL
2-4.GROUNDING HARPOON: TIN PLATED OVERALL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.VOLTAGE RATING: 250V MAX
3-3.CONTACT RESISTANCE: 25mΩ Max.
3-4.INSULATION RESISTANCE: 5000MΩ MIN
3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC Min
4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -55°C~+105°C.
5.P/N ORDER:
WLDBM9-25 1 X X 0 115
PLATING: 1-G/F COLOUR:
A-BLACK

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBM9-251XX0115	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13			
				0.0±0.35	X°REF±6°						
				UNIT: mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE: DR8.08 25P 90°DIP LOCK SCREW	
				SIZE: A4	0.000±0.10	X°X° ±2°	DRAWN	Zijun_Huang	21.01.13		