

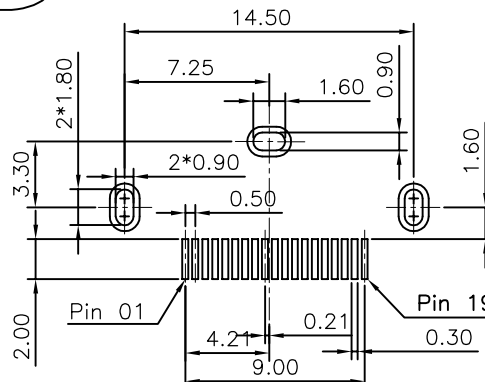
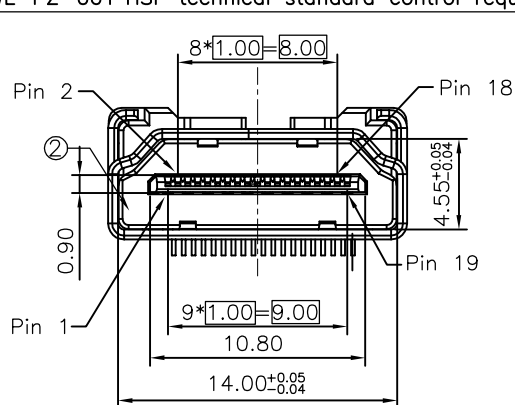
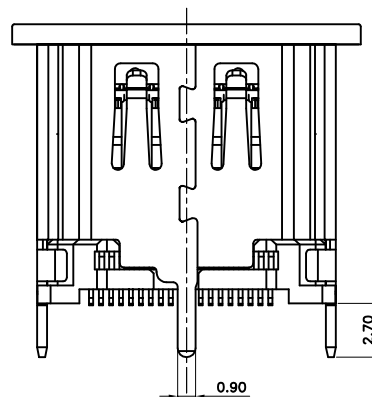


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

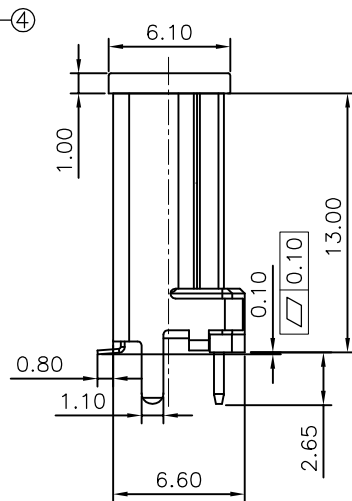

RECOMMENDED P.C.B. LAYOUT (T:1.20~1.60mm)
TOLERANCE UNSPECIFIED ±0.05mm

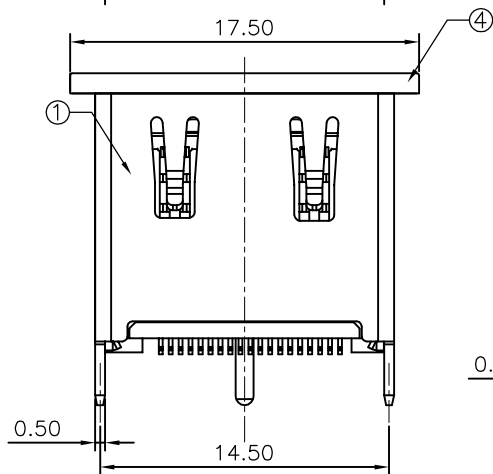

SPECIFICATIONS

- 1.OPERATING CURRENT: 0.5A MAX.
- 2.OPERATION TEMPERATURE: -25°C TO +85°C
- 3.DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADIACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADIACENT TERMINAL(MATE)
- 4.INSULATION RESISTANCE:
100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)
- 5.HDMI SPECIFICATION COMPLIANCE

PART ORDER:

WLHDF0-19 2 X X 0 017

PLATING: 1-G/F
2-Au 3u"
5-Au 15u"
6-Au 30u"
COLOUR: A-BLACK

4	DUST COVER	1	THERMOPLASTIC UL94V-0
3	CONTACTS	19	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100u" MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	SPCC,NICKEL PLATED
ITEM	NAME	Q'TY	NOTES

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13	LINEAR	1:1	Wang_jr	21.01.13	WLHDF0-192XX0017	ENDE05		
			ANGLES	APPROVED	Ding_bo	21.01.13	TITLE: HDMI A TYPE,180° SMT CONNECTOR		REV: A0	SHEET: 1/1
			0.0±0.35	DESIGNER	Ou_jian	21.01.13				
			0.00±0.25	DRAWN						
			0.000±0.10							