
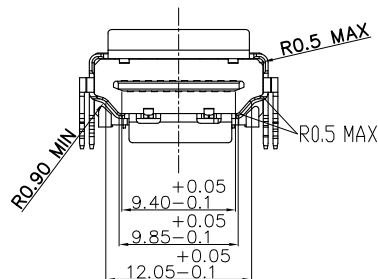
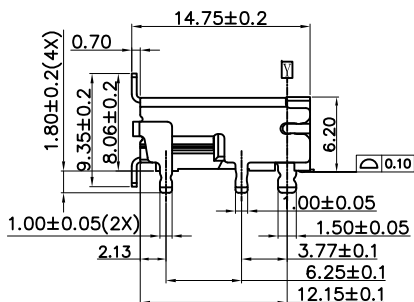
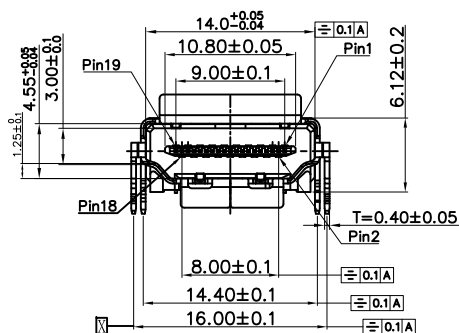
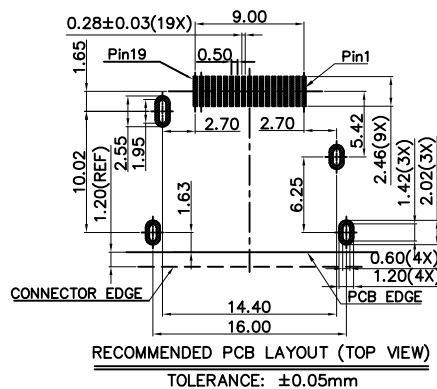


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS



NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: LCP BLACK UL94 V-0

1-2.CONTACTS: C2680

1-3.SHELL: SUS430.

2.PLATING SPECIFICATION:

2-1.CONTACTS:

Ni 50u" MIN. UNDER PLATED OVER ALL.

AU5U" PLATED ON THE FUNCTIONAL AREA OF CONTACT.

2-2. SHELL:

Ni 30u" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:

3-1.INSERTION FORCE: 4.5kgf MAX

3-2.REMOVAL FORCE: 1.0kgf MIN

3-3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE:

4-1.CURRENT RATING: 0.5A

4-2.VOLTAGE RATING: 40V MAX

4-3.Contact Resistance: 30m Ohm Max.

4-4.INSULATION RESISTANCE: 100MΩ MIN

4-5.Dielectric Withstanding Voltage: 500V AC Min

5.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -20°C~+85°C.

WLHDF9-19 2 X X 0006

PLATING:

1 C/F

2 AU 3U"

5 AU 15U"

6 AU 30U"

Colour:

A: Black

K: White

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21. 01. 13		LINEAR	ANGLES	APPROVED	Wang_jr	21. 01. 13	WLHDF9-192XX0006	ENDE05		
				0. 0±0. 35	X° REF±6°	DESIGNER	Ding_bo	21. 01. 13	TITLE:			
			UNIT: mm	0. 00±0. 25	X° ±3°		Ding_bo	21. 01. 13	HDMI A TYPE Female SMT贴板 四脚插板有边脚高1.8		REV: A0	SHEET: 1/2
			SIZE: A4	0. 000±0. 10	X° X'±2°	DRAWN	Ou_jian	21. 01. 13				

