


RoHS

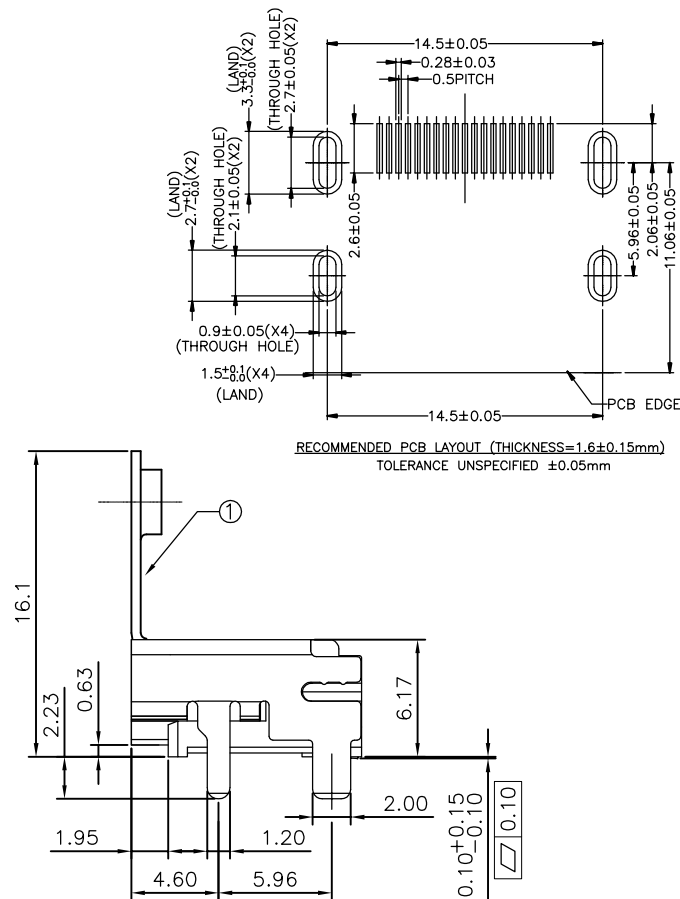

- 1.OPERATING CURRENT: 0.5A MAX.
- 2.OPERATION TEMPERATURE: -25°C TO +85°C
- 3.DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADJACENT TERMINAL(MATE)
- 4.INSULATION RESISTANCE:
100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)
- 5.HDMI SPECIFICATION COMPLIANCE

WLHDF9-19 2 X X 0 015

PLATING: COLOUR:
1-G/F A-BLACK
2-Au 3u"
5-Au 15u"
6-Au 30u"

3	CONTACTS	19	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100u" MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	COPPER ALLOY ,NICKEL PLATED
ITEM	NAME	Q.TY	NOTES

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLHDF9--192XX0015	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	REV: A0	SHEET: 1/1
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13					
				0.0±0.35	X*REF±6°								
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Ding_bo	21.01.13	TITLE: HDMI A TYPE,R/A SMT CONNECTOR			
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Ou_jian	21.01.13				

W 万连科技
WanLian Teconology Co., Ltd

REV: A0	SHEET: 1/1
---------	------------