

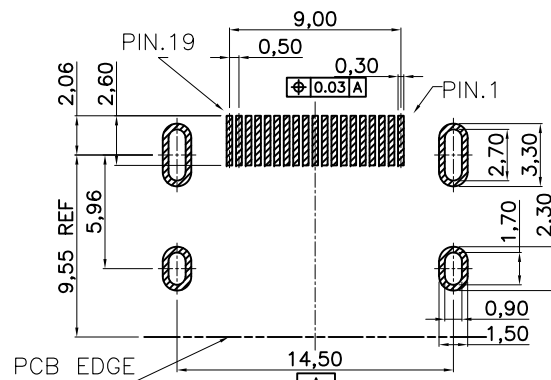
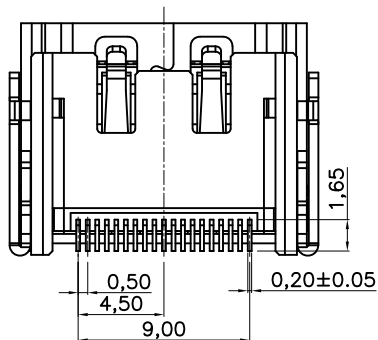
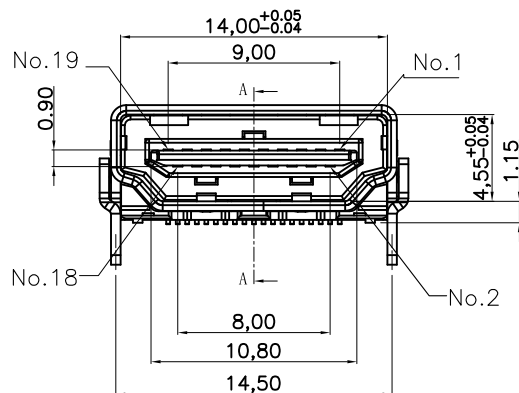


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

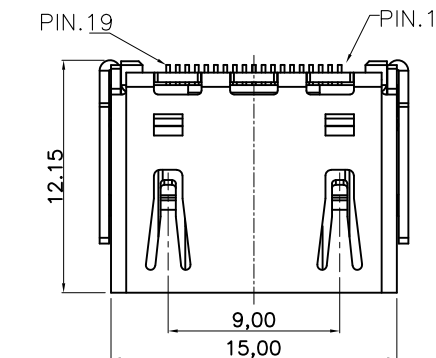

RECOMMENDED PCB LAYOUT(T=1.60mm)
TOP VIEW, TOLERANCE UNLESS OTHERWISE:±0.05

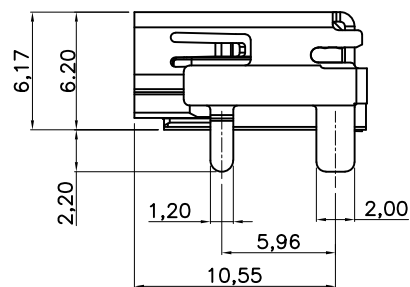

NOTE:

1.MATERIAL:

- 1.1 INSULATOR:LCP+30%GF, UL94V-0, COLOR:BLACK
- 1.2 CONTACT: C2680R/H
- 1.3 SHELL:BRASS T=0.5MM

2. PLATING:

- 2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED ON SOLDER TAIL
50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL:50u" Min. NICKEL PLATED OVERALL

3. CHARACTERISTICS:

- 3.1 ELECTRICAL CHARACTERISTICS;
CONTACT RESISTANCE:30mΩ MAXIMUM
CONTACT CURRENT RATING:0.5A
DIELECTRIC WITHSTANDING VOLTAGE:500 V AC R.M.S.
INSULATION RESISTANCE 100 MEGOHMS MIN
OPERATING TEMPERATURE:-25°C ~ +85°C
- 3.2 MECHANICAL:
MATING FORCE: 4.5Kg.Max.
UNMATING FORCE: 1.0Kg.Min.

WLHDF9-19 2 X X 0033

PLATING: 1-G/F 2-AU 3U" 5-AU 15U" 6-AU 30U"
COLOUR: A:Black

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1			WLHDF9-192XX0033	ENDE05		
				0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.01.13				
				0.00±0.25	X°±3°	DESIGNER	Ding_bo	21.01.13				
			UNIT:mm	0.000±0.10	X°X' ±2°	DRAWN	Ou_jian	21.01.13	TITLE: HDMI RECEPTACME SMT TYPE WITHOUT CAP, WITHOUT SPRING		REV: A0	SHEET: 1/1