


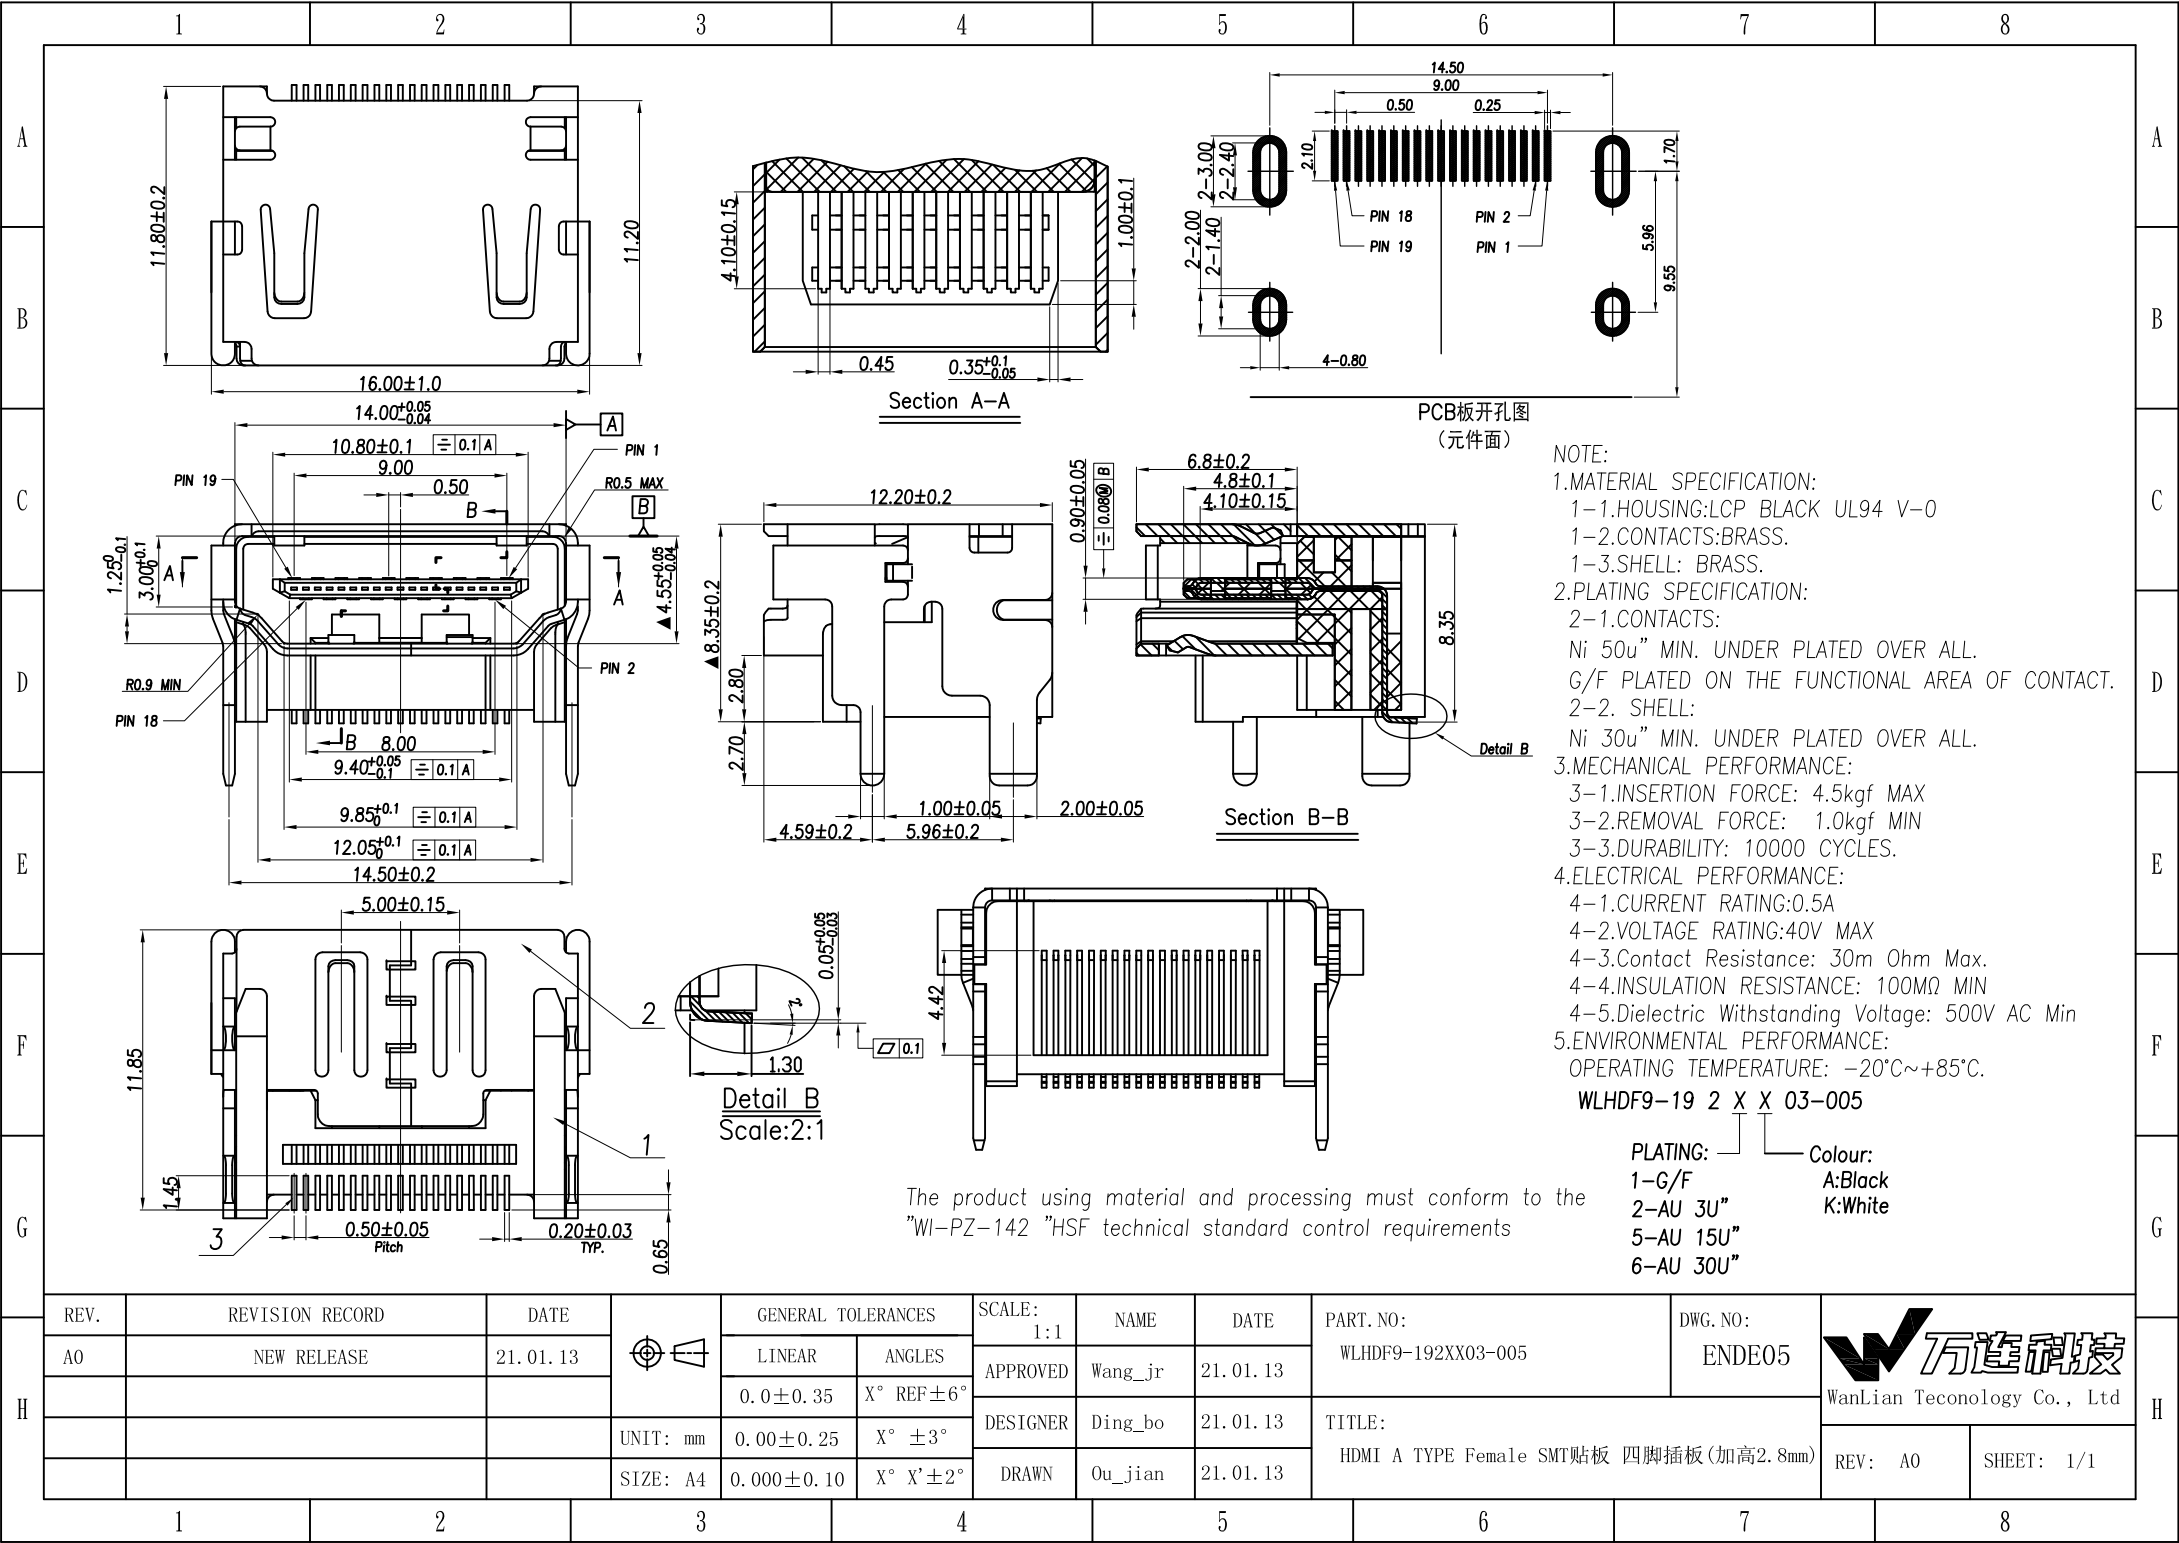

NOTE:

1.MATERIAL SPECIFICATION:
1-1.HOUSING:LCP BLACK UL94 V-0
1-2.CONTACTS:BRASS.
1-3.SHELL: BRASS.

2.PLATING SPECIFICATION:
2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
G/F PLATED ON THE FUNCTIONAL AREA OF CONTACT.

2-2. SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:
3-1.INSERTION FORCE: 4.5kgf MAX
3-2.REMOVAL FORCE: 1.0kgf MIN
3-3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING:0.5A
4-2.VOLTAGE RATING:40V MAX
4-3.Contact Resistance: 30m Ohm Max.
4-4.INSULATION RESISTANCE: 100MΩ MIN
4-5.Dielectric Withstanding Voltage: 500V AC Min

5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -20°C~+85°C.

WLHDF9-19 2 X X 03-005

PLATING: 1-G/F
2-AU 30u"
5-AU 15U"
6-AU 30U"

Colour: A:Black
K:White

The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: WLHDF9-192XX03-005	DWG. NO: ENDE05	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	21. 01. 13		LINEAR	ANGLES	APPROVED	Wang_jr	21. 01. 13				
				0. 0±0. 35	X° REF±6°							
				UNIT: mm	0. 00±0. 25	X° ±3°	DESIGNER	Ding_bo	21. 01. 13			
			SIZE: A4	0. 000±0. 10	X° X'±2°	DRAWN	Ou_jian	21. 01. 13	TITLE: HDMI A TYPE Female SMT贴板 四脚插板 (加高2. 8mm)			REV: AO

