


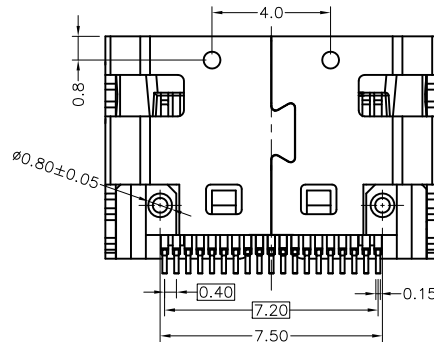
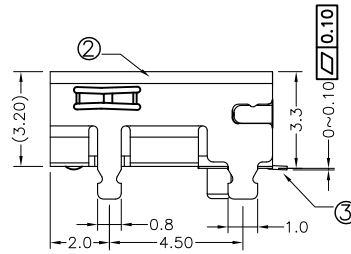
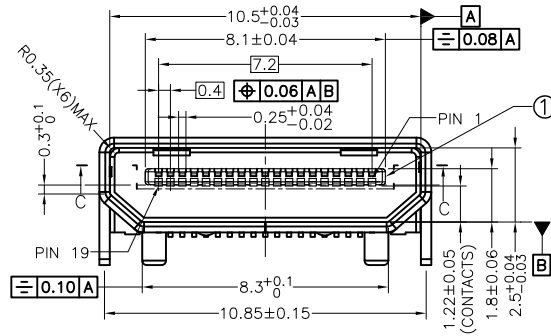
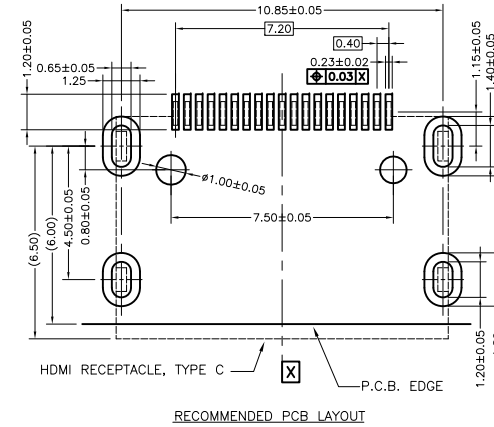
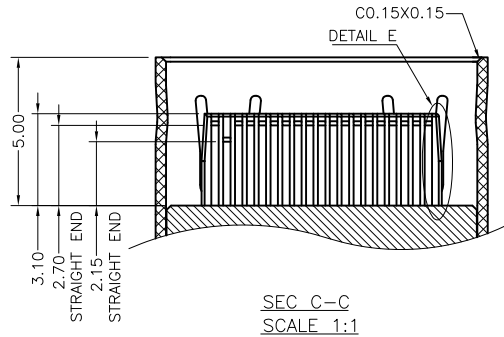


The product using material and processing must conform to the technical standard control requirements

"WI-PZ-142"HSF

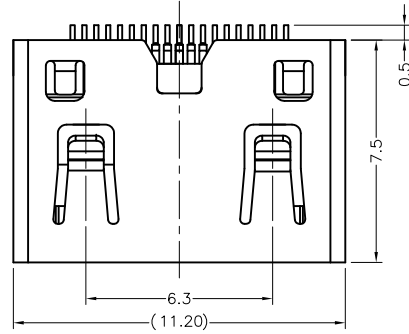

NOTE:

1. MECHANICAL:

1.1 INSERTION FORCE: 4.5Kgf MAX

1.2 WITHDRAW FORCE: 0.71Kgf~2.55Kgf

2. ELECTRICAL:

2.1 CONTACT CURRENT RATING: 0.5A MAX

2.2 VOLTAGE RATING: 40V AC (RMS)

2.3 DIELECTRIC WITHSTANDING VOLTAGE:

500 V AC FOR 1 MINUTE

2.4 INSULATION RESISTANCE : 100 MEGAOHMS MIN

2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX

3. ENVIRONMENTAL:

3.1 OPERATING TEMPERATURE : -25~+85

PART ORDER:

WLHDF9-19 2 X X 04-006

PLATING:

1-G/F

2-AU 3U"

5-AU 15U"

6-AU 30U"

COLOUR:

A: Black

3	CONTACTS	19	COPPER ALLOY, GOLD PLATED, OVER NICKEL ON CONTACT AREA AND 100u" MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	COPPER ALLOY, NICKEL PLATED
ITEM	NAME	Q'TY	NOTES

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLHDF9—192XX04—006	ENDE05		
				0.0±0.35	X°REF±6°	DESIGNER	Ding_bo	21.01.13	TITLE: HDMI C TYPE,R/A SMT CONNECTOR			
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Ou_jian			21.01.13	
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A0	SHEET: 1/1