

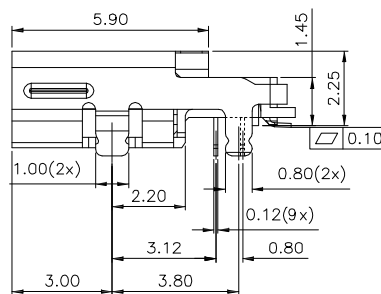
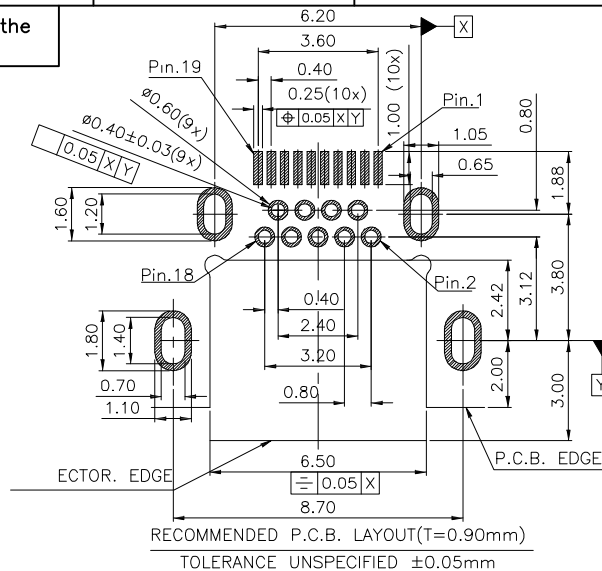

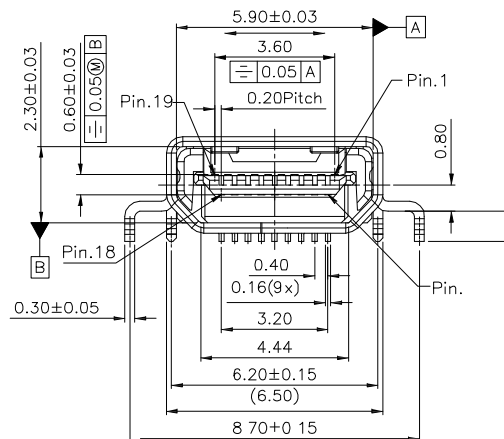


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

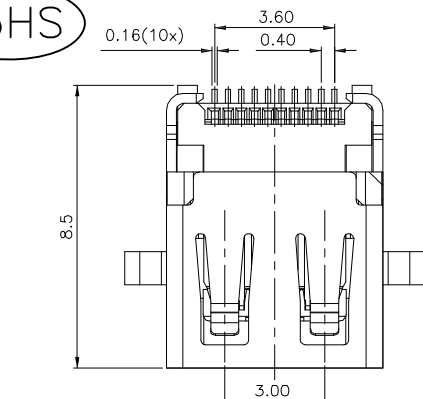

NOTE:

1.MATERIAL:

1.1 INSULATOR:THERMOPLASTIC+30%GF, UL94V-0, COLOR:BLACK

1.2 CONTACT: COPPER ALLOY

1.3 SHELL:STAINLESS STEEL

2. PLATING:

2.1 CONTACT: SELECTIVE GOLD PLATING OVER NICKEL IN CONTACT,

50u" Min. NICKEL UNDER-PLATED

80u" Min. TIN PLATED AT SOLDER TAILS.

2.2 SHELL:50u" Min. NICKEL PLATED OVERALL

3. CHARACTERISTICS:

3.1 ELECTRICAL CHARACTERISTICS;

CONTACT RESISTANCE:30mΩ MAXIMUM

CONTACT CURRENT RATING:0.3A MIN.

DIELECTRIC WITHSTANDING VOLTAGE:250V AC R.M.S.

INSULATION RESISTANCE 100 MEGOHMS MIN

OPERATING TEMPERATURE:-25°C ~ +85°C

3.2 MECHANICAL:

MATING FORCE: 4.5Kg.Max.

UNMATING FORCE: 0.51-2.55Kg.

WLHDF9-19 3 X X 0022

PLATING:

1-G/F

2-AU 3U"

5-AU 15U"

6-AU 30U"

COLOUR:

A:Black

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLHDF9—193XX0022	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	TITLE: HDMI D TYPE RECEPTACLE LOW PROFILE, HYBRID		
				0.0±0.35	X°REF±6°	DESIGNER	Ding_bo	21.01.13			
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Ou_jian	21.01.13			
			SIZE: A4	0.000±0.10	X°X' ±2°				REV: A0	SHEET: 1/1	