
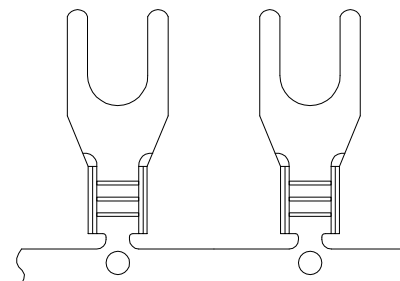
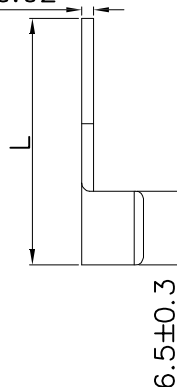



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

 $T: 1.0 \pm 0.02$ 
$$6.8 \pm 0.3$$


备注:

1. 接压线径: AWG10-12#
2. 端子材质: 紫铜
3. 表面处理: 镀锡

ItemNO.料号	螺栓规格		mm/inch 主要尺寸		
	Stud Size	d±0.2	W±0.2	F±0.5	L±1.0
WLLS20-037AD030A02	#6	3.7(.145)	7.2(.283)	7.5(.295)	18.0(.708)
WLLS20-043AD030A03	#8	4.3(.169)	8.4(.33)	7.0(.275)	19.0(.748)
WLLS20-043AD030A04	#8	4.3(.169)	9.0(.354)	7.0(.275)	19.0(.748)
WLLS20-053AD030A02	#10	5.3(.208)	9.0(.354)	7.5(.295)	19.0(.748)
WLLS20-064AD030A03	#1/4	6.4(.251)	9.0(.354)	7.5(.295)	19.0(.748)
WLLS20-064AD030A04	#1/4	6.4(.251)	12.0(.472)	12.1(.476)	25.5(1.003)
WLLS20-084AD030A02	#5/16	8.4(.33)	14.0(.551)	11.5(.452)	24.0(.968)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLLS20-XXXAD030AXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	REV: A0 SHEET: 1/1	
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17					
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: 无绝缘Y形连续端子 SNB5.5 接线4-6mm² (12-10AWG)				
				UNIT:mm	0.00±0.25	X°±3°							
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang		21.11.17			