

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT,UL94V-0
 - 1-2.CONTACTS: PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:GOLD FLASH PLATING OVER NICKEL
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 2.24kgf MAX
 - 3-2.DURABILITY: 750 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 1.5A
RATED VOLTAGE : 125V AC/DC
 - 3-2.CONTACT RESISTANCE: 40 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 500MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+85°C.
- 5.PACKAGE SPEC:TRAY

P/N:



WLR4F0-08 1 X X X 055

PLATING:

1-G/F
2-Au 3u"
3-AU 6u"
5-Au 15u"
6-Au 30u"

— HOUSING:

1-PBT
2-LCP
3-PA46
— COLOR:
A-BLACK
J-GRAY

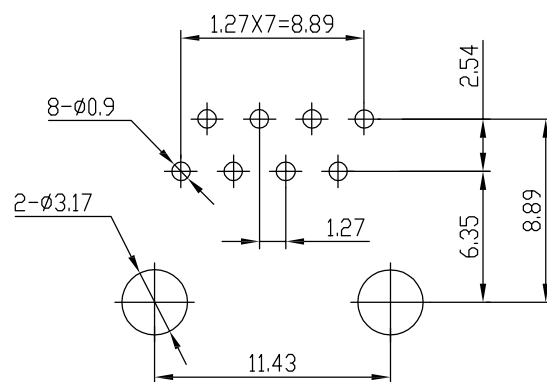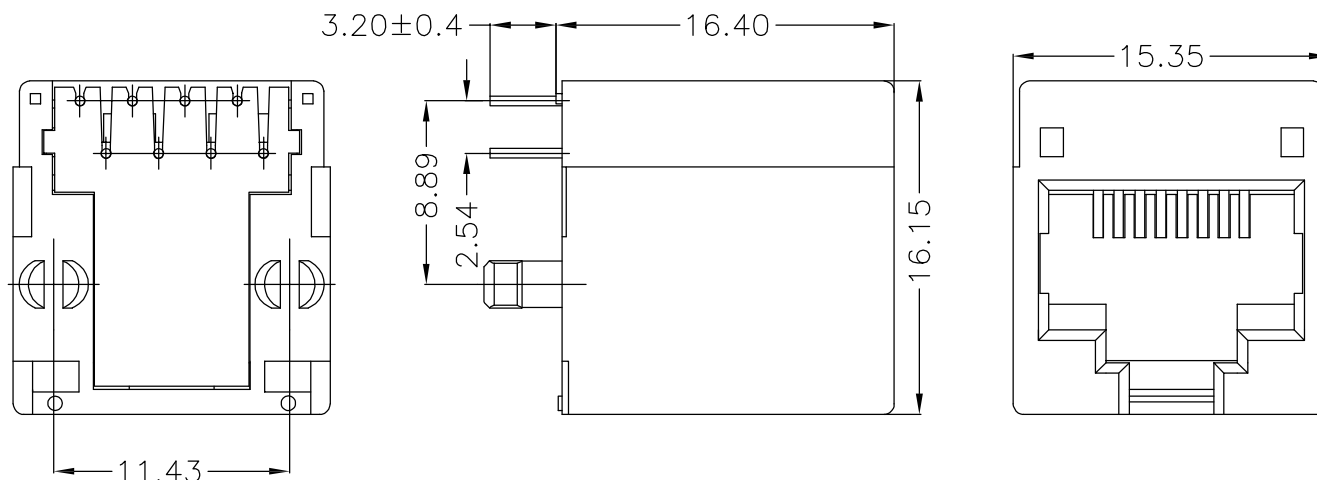

P.C.B LAYOUT
TOL:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLR4F0-081XXX055	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13			
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: RJ45 立式全塑无灯DIP		
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Longcan_Liu		21.01.13	
				SIZE: A4	0.000±0.10	X°X' ±2°					