
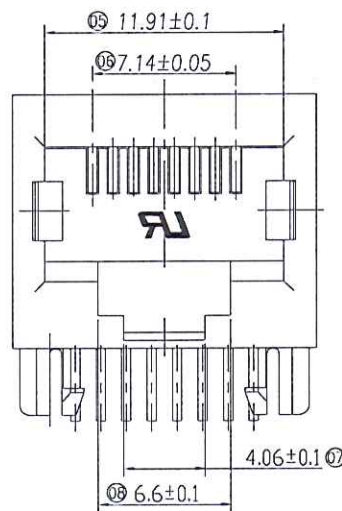


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

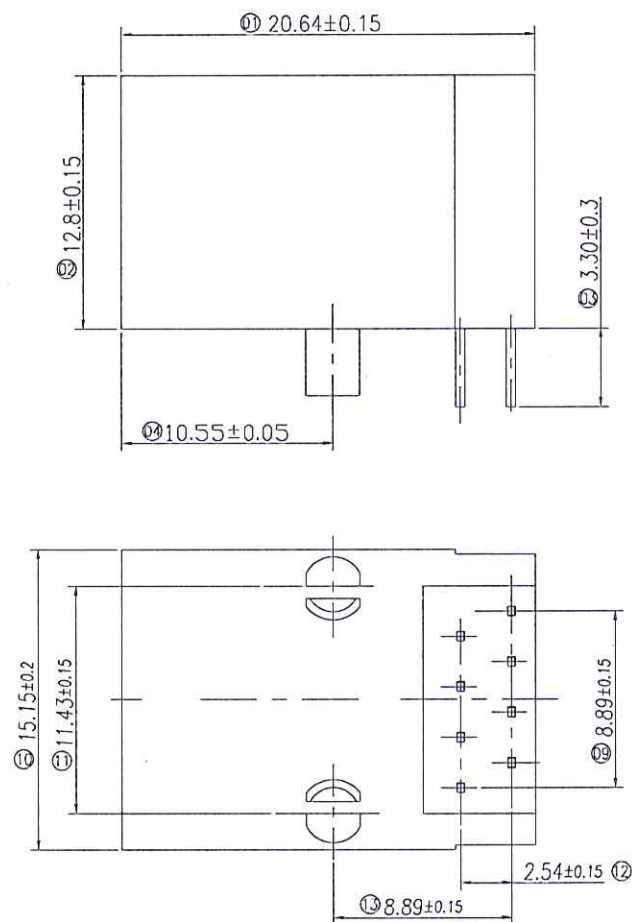

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC FOR 5S.
5. DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

MECHANICAL:

1. HOUSING&INSERT&MATERIAL:PBT
2. CONTACT PIN MATERIAL:PHOSPHOR BRONZE T=0.35MM
3. PLATING: Ni/Sn/Au (GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL).
4. OPERATING LIFE:750 CYCLES MIN.
5. MATING/UNMATING FORCE: 30N/3.06KGf MAX.
6. RETENTION STRENGTH:50N MIN.FOR 60S±5S

ENVIRONMENTAL:

1. STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
2. GUARANTEE PERIOD:12 MONTHS
3. OPERATION: -40°C TO +85°C
4. WAVE SOLDERING TEMPERATURE: 260±5°C 5~10 SECONDS.

P/N:

WLR4F9-08 1 X X 0003

PLATING:

1-G/F
2-AU 3u"
5-AU 15u"
6-AU 30u"

COLOUR:

A-BLACK



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A1	NEW RELEASE	22.06.27		LINEAR	ANGLES	1:1			WLR4F9-081XX0003	ENDE05	
				0.0±0.35	X'REF±6°	APPROVED	王利	2022.7.27			
				0.00±0.25	X'±3°	DESIGNER	陈子明	2022.7.27			
				0.000±0.10	X'X'±2°	DRAWN	侯子通	2022.7.27			
									TITLE: RJ45插座 8P8C 扁针 侧面进胶		
										REV: A1	SHEET: 1/2

1	2	3	4	5	6	7	8	
The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements								
A								A
B								B
C								C
D								D
E								E
F								F
G								G
H								H

说明:

- 产品左图所示PIN针朝上放入真空盒内,100PCS/盒;
- 把盖好上盖的真空盒用透明胶带封装好;
- 将26盒产品装入纸箱内,并封好箱;
- 装箱数量不足整箱时用环保类填充物填满.
- 在纸箱侧唛贴好外箱标签.

PIN针朝上放入真空盒内

1. 将产品按同一方向放入真空盒中, 将标签贴于真空盒上, 两头订钉;

100pcs/盘, 用订书机封好

2. 将真空盒按同一方向放入纸箱中.

3. 用透明胶纸将纸箱"工"字型封箱, 取标签贴于纸箱侧唛右上角.

合格标签位置
环保标签位置

26盒/箱, 共2600pcs
370*290*260mm
K3K 空白纸箱

广东万连科技有限公司

2022.07.27

产品中心
技术文件发行章

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
A1	NEW RELEASE	22.06.27		LINEAR	ANGLES	APPROVED	王利	2022.7.27	WLR4F9-081XX0003	ENDE05		
				0.0±0.35	X°REF±6°	DESIGNER	陈少强	2022.7.27	TITLE:			
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	侯少强	2022.7.27	RJ45插座 8P8C 扁针 侧面进胶		
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A1	SHEET: 2/2

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---