

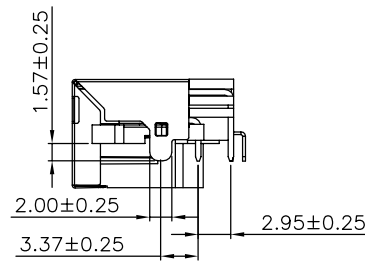



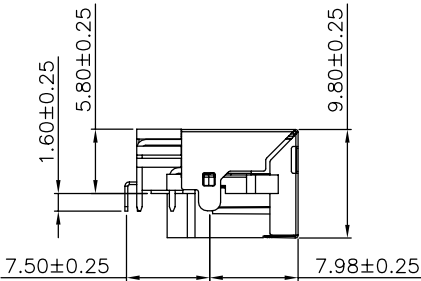


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

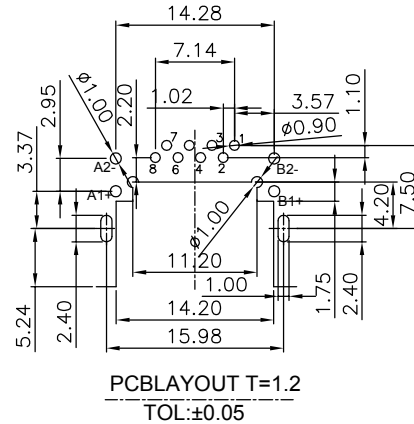

8	—
7	—
6	RX-
5	—
4	—
3	RX+
2	TX-
1	TX+
PIN序 说明	

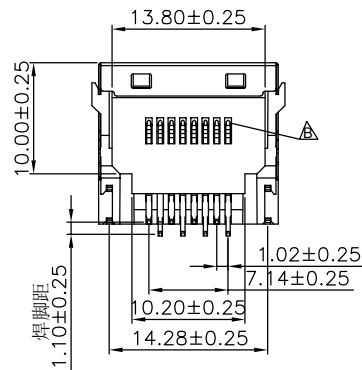

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING: LCP UL94V-0
- 1-2.SHELL: STAINLESS T=0.20mm
- 1-3.CONTACT: PHOSPHOR BRONZE T=0.25MM
- 1-4.GASKET:SPCC T=0.40mm

2.PLATING SPECIFICATION:

SELECT GOLD PLATING ON CONTACT AREA
TIN PLATING ON SOLDER AREA OVER Ni

- 2-1.SHELL:
Ni PLATING OVER ALL
- 2-2.LED:
TIN PLATING OVER ALL
- 2-3.GASKET:
Ni PLATING OVER ALL

3.MECHANICAL PERFORMANCE:

- 3-1.INSERTION FORCE: 22N MAX
- 3-2.REMOVAL FORCE: 22N MAX
- 3-2.DURABILITY: 750 CYCLES MIN.

4.ELECTRICAL PERFORMANCE:

- 4-1.CURRENT RATING:1.5A
- 4-2.VOLTAGE RATING:125V MAX
- 4-3.CONTACT RESISTANCE: 40mΩ Max.
- 4-4.INSULATION RESISTANCE: 500MΩ MIN
- 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min

5.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -40°C~+85°C.

6.PACKAGE SPEC:TRAY

P/N:

WLR4F9-08 8 X X X 034

PLATING:

- 1-G/F
- 2-AU 1U"
- 3-AU 5U"
- 5-AU 15U"
- 6-AU 30U"

COLOUR:
A-BLACK

LED:

- 1-LEFT:YELLOW
RIGHT:GREEN
- 2-LEFT:GREEN
RIGHT:YELLOW
- 3-LEFT:AMBER
RIGHT:GREEN
- 4-LEFT:GREEN
RIGHT:AMBER

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLR4F9—088XXX034	ENDE05		
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: RJ45 8P8C DIP沉板式5.8MM			
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang				
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: AO	SHEET: 1/1