

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -25°C ~85°C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
- 9.IPX7

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED  $\pm 0.05\text{mm}$


Add Ring Drawing

|     |                 |                          |                  |      |
|-----|-----------------|--------------------------|------------------|------|
| 6   | 防水圈             | 硅胶                       | BLACK            | 1PCS |
| 5   | SHELL           | STAINLESS STEEL          | NI Plated        | 1PCS |
| 4   | SHIELDING PLATE | STAINLESS STEEL          | NI Plated        | 1PCS |
| 3   | CONTACT         | COPPER ALLOY             | TIN/Au/NI Plated | 1SET |
| 2   | SHELL HOUSING   | HIGH TEMPERATURE PLASTIC | BLACK            | 1PCS |
| 1   | HOUSING         | HIGH TEMPERATURE PLASTIC | BLACK            | 1PCS |
| NO. | DESCRIPTION     | MATERIAL                 | REMARKS          | QTY  |

|      |                 |          |                                                                                     |                    |            |               |          |             |                              |                                 |                                                                                                                      |            |
|------|-----------------|----------|-------------------------------------------------------------------------------------|--------------------|------------|---------------|----------|-------------|------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------|------------|
| REV. | REVISION RECORD | DATE     |  | GENERAL TOLERANCES |            | SCALE:<br>1:1 | NAME     | DATE        | PART.NO:<br>WLT2F9-062XX0066 | DWG.NO:<br>ENDE05               | <br>WanLian Teconology Co., Ltd |            |
| A0   | NEW RELEASE     | 21.11.17 |                                                                                     | LINEAR             | ANGLES     | APPROVED      | Wang_jr  | 21.11.17    |                              |                                 |                                                                                                                      |            |
|      |                 |          |                                                                                     | 0.0±0.35           | X°REF±6°   |               |          |             |                              |                                 |                                                                                                                      |            |
|      |                 |          |                                                                                     | UNIT:mm            | 0.00±0.25  | X°±3°         | DESIGNER | Han_Gao     | 21.11.17                     | TITLE:<br>TYPE C 6P/F 四脚插板 IPX7 |                                                                                                                      |            |
|      |                 |          |                                                                                     | SIZE: A4           | 0.000±0.10 | X°X' ±2°      | DRAWN    | Zijun_Huang | 21.11.17                     |                                 |                                                                                                                      |            |
|      |                 |          |                                                                                     |                    |            |               |          |             |                              |                                 | REV: A0                                                                                                              | SHEET: 1/2 |


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

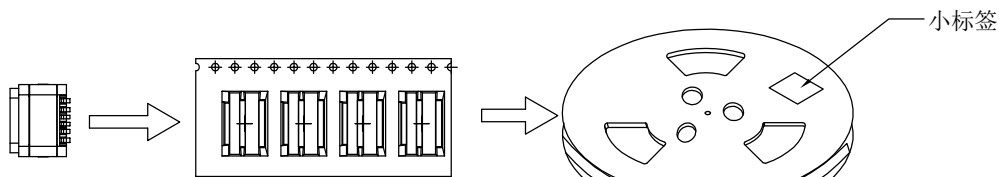


① 产品入载带示意图

② 卷盘贴标签示意图

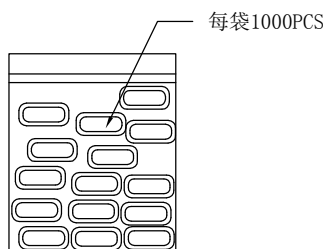

防水圈袋装示意图

③ 10盘产品叠层示意图

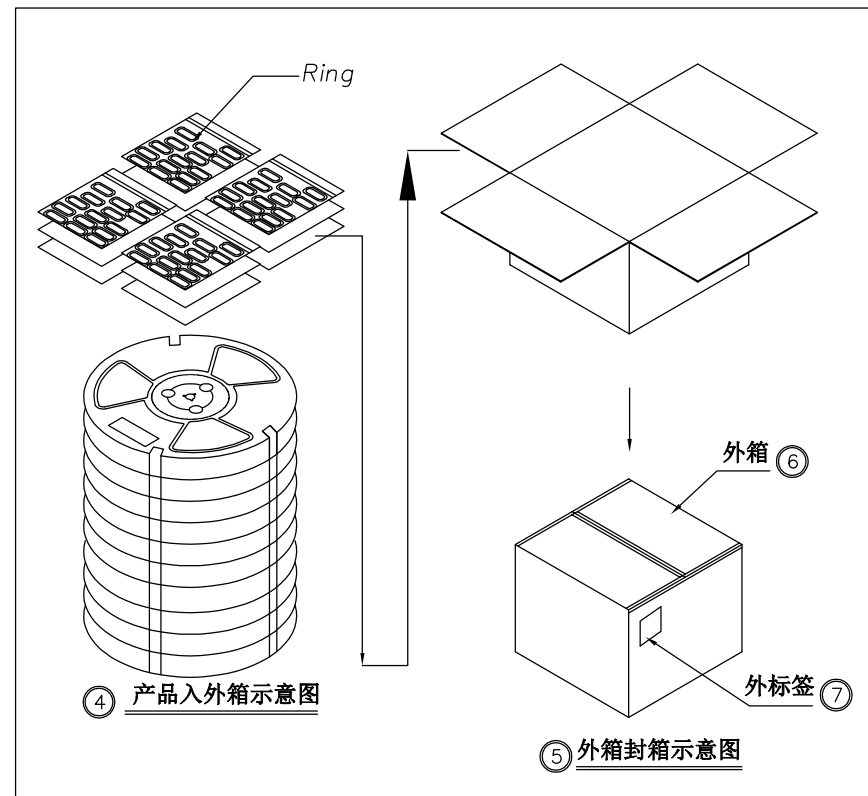

④ 产品入外箱示意图

⑤ 外箱封箱示意图

P/N:

WLT2F9-06 2 X X 0 066

Plating Contact

1-G/F

2-Au 3u"

3-AU 5u"

5-Au 15u"

6-Au 30u"

COLOR:  
A-BLACK

CONNECTOR (PCS)

REEL

700

CARTON

7000

| REV. | REVISION RECORD | DATE     |          | GENERAL TOLERANCES |          | SCALE:<br>1:1 | NAME        | DATE     |
|------|-----------------|----------|----------|--------------------|----------|---------------|-------------|----------|
| A0   | NEW RELEASE     | 21.11.17 |          | LINEAR             | ANGLES   | APPROVED      | Wang_jr     | 21.11.17 |
|      |                 |          |          | 0.0±0.35           | X°REF±6° | DESIGNER      | Han_Gao     | 21.11.17 |
|      |                 |          |          | 0.00±0.25          | X'±3°    | DRAWN         | Zijun_Huang | 21.11.17 |
|      |                 |          | UNIT:mm  | 0.00±0.10          | X°X'±2°  |               |             |          |
|      |                 |          | SIZE: A4 |                    |          |               |             |          |

|                                 |  |                   |  |         |            |
|---------------------------------|--|-------------------|--|---------|------------|
| PART.NO:<br>WLT2F9-062XX0066    |  | DWG.NO:<br>ENDE05 |  |         |            |
| TITLE:<br>TYPE C 6P/F 四脚插板 IPX7 |  |                   |  | REV: A0 | SHEET: 2/2 |
|                                 |  |                   |  |         |            |