


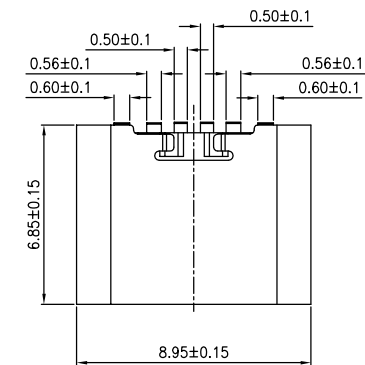




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

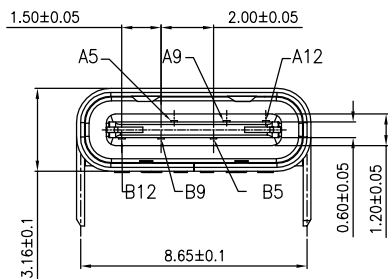

3D VIEW

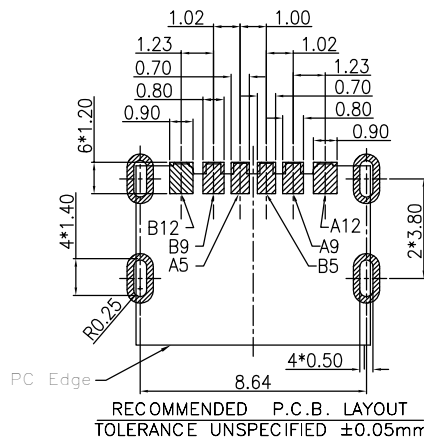

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

PART NO.:
WLT2F9-06 2 X X X 211

PLATING:
1-G/F
2-Au 3u"
5-Au 15u"
6-Au 30u"
SHELL:
9-NI
COLOUR:
A-BLACK

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: LCP, UL94 V-0.
 - CONTACTS: COPPER ALLOY (C1814)
 - FRONT SHELL: STAINLESS STEEL (SUS304)
 - PLATING SPECIFICATION:
 - CONTACTS:
Ni UNDER PLATED OVER ALL.
G/F PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - FRONT SHELL: Ni UNDER PLATED OVER ALL.
 - MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 0.5~2.0kgf.
 - REMOVAL FORCE: 0.8~2.0kgf.
 - DURABILITY: 10000 CYCLES.
 - ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 5.0A
VOLTAGE RATING: 5.0V
 - LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
 - ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
 - IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.
 - PACKAGE SPEC: REEL

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLT2F9-062XXX211	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	TITLE: TYPE C 6P/F SMT 四脚插板 脚高2.0mm L=6.8mm	REV: A0	
				0.0±0.35	X*REF±6°						
				UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	21.01.13		
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	Zijun_Huang	21.01.13			