


RoHS








Pin	Signal Name	Pin	Signal Name	Pin	Signal Name	Pin	Signal Name
A1	GND	B12	GND	A7	D-	B6	D+
A2	TX1+	B11	RX1-	A8	SBU1	B5	CC2
A3	TX1-	B10	RX1+	A9	VBUS	B4	VBUS
A4	VBUS	B9	VBUS	A10	RX2-	B3	TX2-
A5	CC1	B8	SBU2	A11	RX2+	B2	TX2-
A6	D+	B7	D-	A12	GND	B1	GND


- 1.MATERIAL SPECIFICATION:
 - 1-1.SHELL: STAINLESS STEEL
 - 1-2.MOLDING HOUSING: LCP BLACK UL94V-0
 - 1-3.CONTACT: COPPER ALLOY
 - 1-4.OUT-SHELL: STAINLESS STEEL
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACT:
Au & Ni UNDER PLATED OVER ALL.
 - 2-2.SHELL:
Ni UNDER PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 0.5~2.0kgf
 - 3-2.REMOVAL FORCE: 0.8~2.0kgf
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1. CURRENT RATING:3.0A
VOLTAGE RATING:20V MAX
 - 4-2.CONTACT RESISTANCE: 30mΩ MAX
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.WITHSTANDING VOLTAGE: 100V AC r.m.s.
- 5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+85°C.
- 6.P/N ORDER:

1-G/F
2-Au 3u"
5-Au 15u"
6-Au 30u"

—COLOUR:
A—BLACK
D—ORANGE

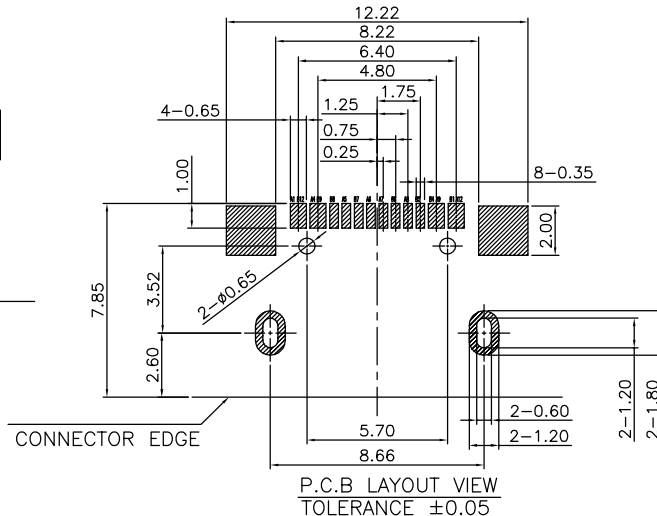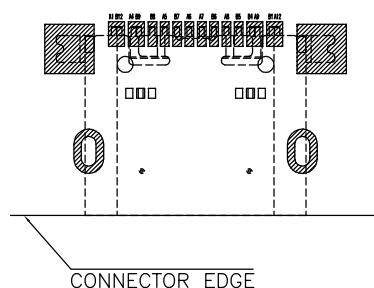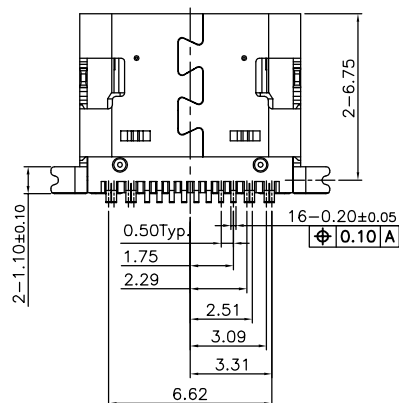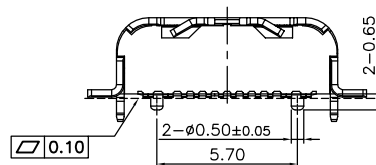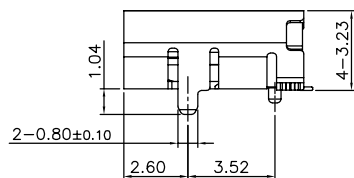

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLT2F9-162XX0135	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X*REF±6°							
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	21.01.13	TITLE: TYPE C 16P/F SMT 前插后贴 L=7.3mm			REV: A0
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	Zijun_Huang	21.01.13				

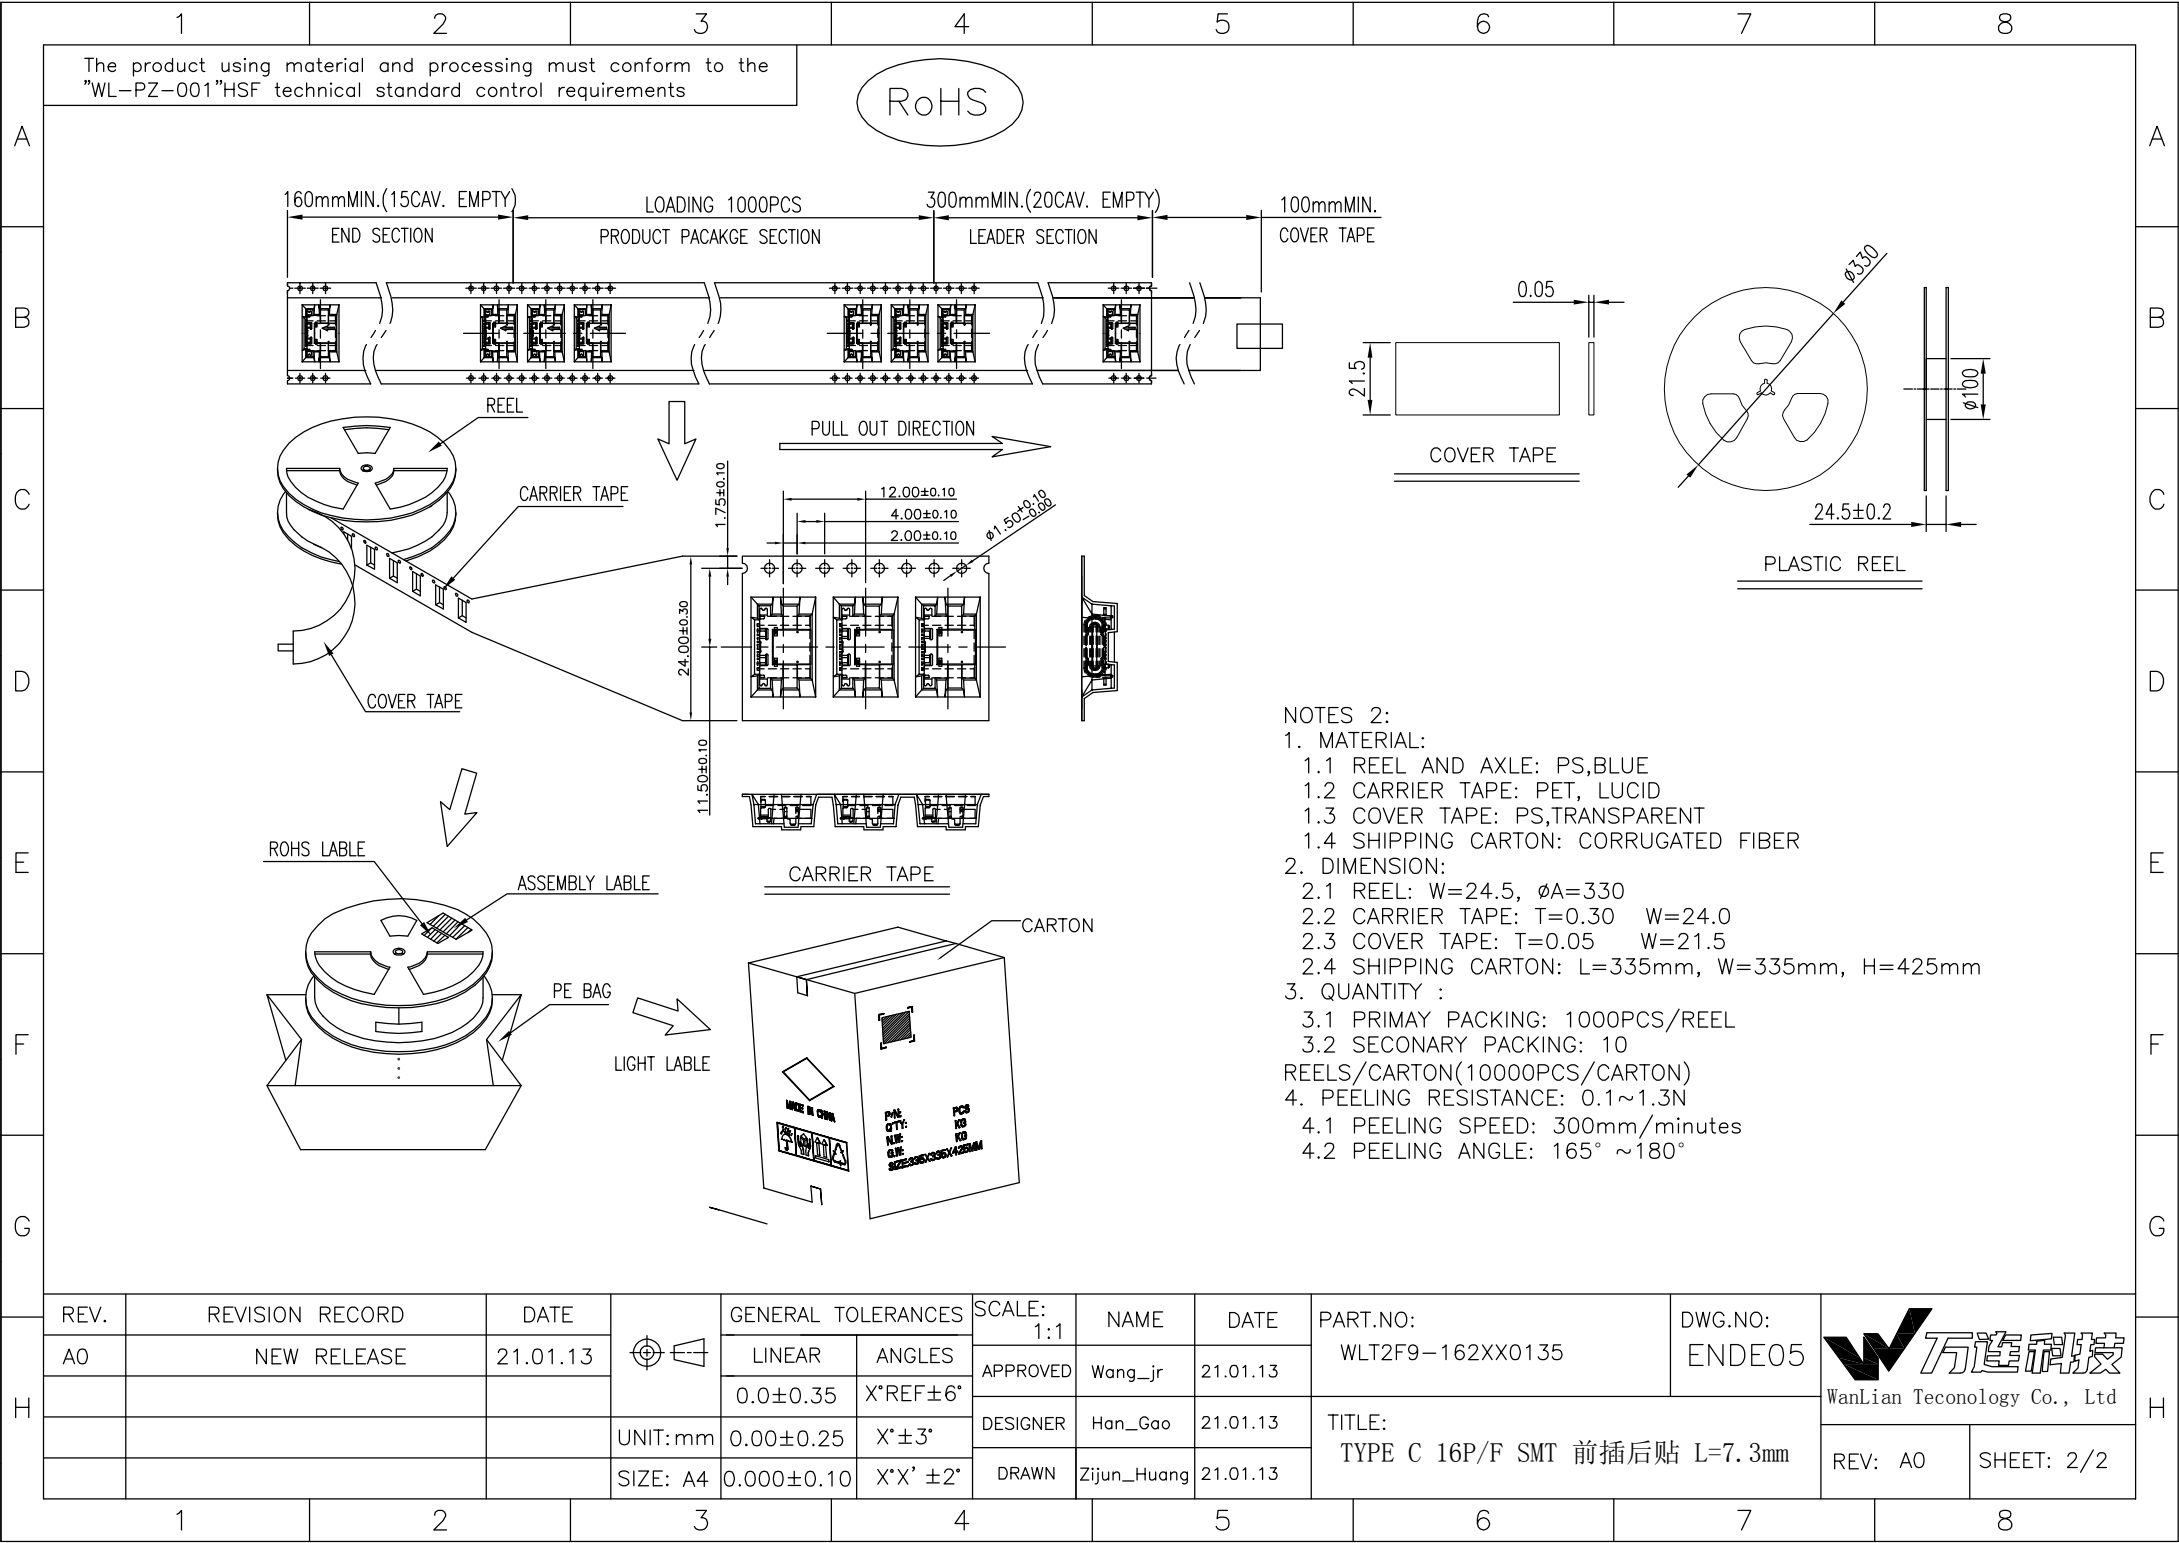

RoHS

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

- NOTES 2:
- 1. MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - 2. DIMENSION:
 - 2.1 REEL: W=24.5, ØA=330
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
 - 3. QUANTITY :
 - 3.1 PRIMAY PACKING: 1000PCS/REEL
 - 3.2 SECONARY PACKING: 10 REELS/CARTON(10000PCS/CARTON)
 - 4. PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLT2F9—162XX0135	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X°REF±6°							
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE: TYPE C 16P/F SMT 前插后贴 L=7.3mm		REV: A0	SHEET: 2/2
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang				