


1	2	3	4	5	6	7	8						
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements			RoHS+HF										
A													
B				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING:LCP BLACK UL94 V-0 1-2.CONTACTS:COPPER ALLOY 1-3.MID PLATE: STAINLESS STEEL 1-4.SHELL: STAINLESS STEEL 2.PLATING SPECIFICATION: 2-1.CONTACTS: Ni 50u" MIN. UNDER PLATED OVER ALL. Au3U" PLATED ON THE FUNCTIONAL AREA OF CONTACT. 2-2.MID PLATE: CLEAR ONLY 2-3.FRONT SHELL: Ni 30u" MIN. UNDER PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.INSERTION FORCE: 0.5~2.0kgf. 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf. 3-3.DURABILITY: 10000 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1. CURRENT RATING:3.0A VOLTAGE RATING:20V MAX 4-2. LLCR: VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX. SHIELD: 50mΩ/MAX. LLCR MAX. CHANGE OF ALL PINS: 10mΩ. 4-3.INSULATION RESISTANCE: 100MΩ MIN 4-4.WITHSTANDING VOLTAGE: 100V AC R.M.S. 5.ENVIRONMENTAL PERFORMANCE: OPERATING TEMPERATURE: -25°C~+85°C. 6.PACKAGE SPEC:TAPE&REEL									
C													
D													
E													
F				WLT2F9-16 8 X X 0007 PLATING: 1-G/F 2-AU 3U" 5-AU15U" 6-AU30U" Colour: A:Black K:White									
G													
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: WLT2F9-168XX0007	DWG. NO: ENDE05	WanLian Teconology Co., Ltd	
	A0	NEW RELEASE	21. 01. 13		LINEAR	ANGLES	APPROVED	Wang_jr	21. 01. 13				
				UNIT: mm	0.0±0.35	X° REF±6°	DESIGNER	Ding_bo	21. 01. 13	TITLE: TYPE C 2.0 16PIN Female SMT 沉板0.8			
					0.00±0.25	X° ±3°	DRAWN	Ou_jian	21. 01. 13	REV: A0	SHEET: 1/2		
				SIZE: A4	0.000±0.10	X° X'±2°							
1	2	3	4	5	6	7	8						

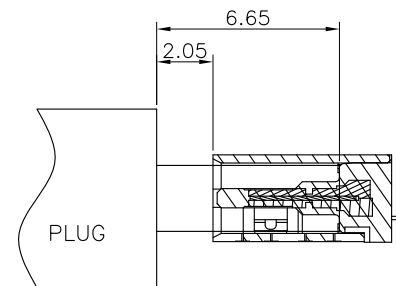

REV: A0	SHEET: 2/2
---------	------------