

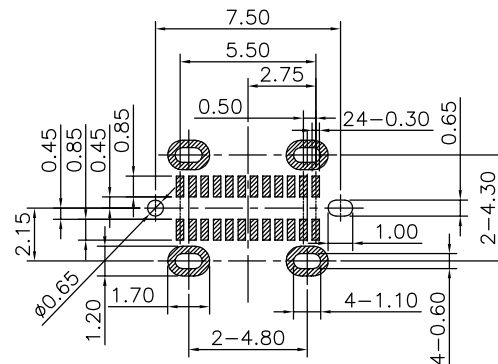



RoHS

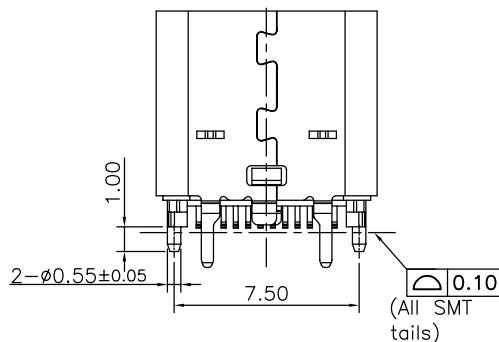

P.C.B LAYOUT VIEW

TOLERANCE ± 0.05

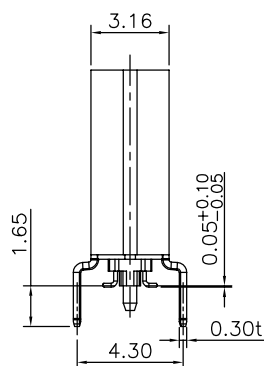

Pin	Signal Name	Pin	Signal Name	Pin	Signal Name	Pin	Signal Name
A1	GND	B12	GND	A7	D—	B6	D+
A2	TX1+	B11	RX1—	A8	SBU1	B5	CC2
A3	TX1—	B10	RX1+	A9	VBUS	B4	VBUS
A4	VBUS	B9	VBUS	A10	RX2—	B3	TX2—
A5	CC1	B8	SBU2	A11	RX2+	B2	TX2—
A6	D+	B7	D—	A12	GND	B1	GND

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLT4F0-242XX0141	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X*REF±6°							
				UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	21.01.13	TITLE: TYPE C 24P/F SMT On the vertical board 8.80H		
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.01.13				
											REV: A0	SHEET: 1/2





WanLian Teconology Co., Ltd

REV: A0

SHEET: 1/2

RoHS

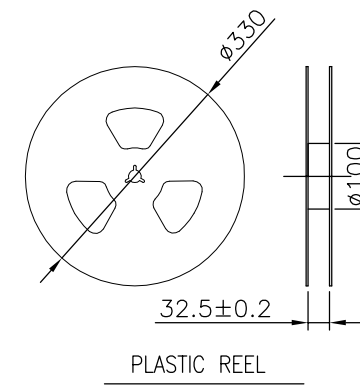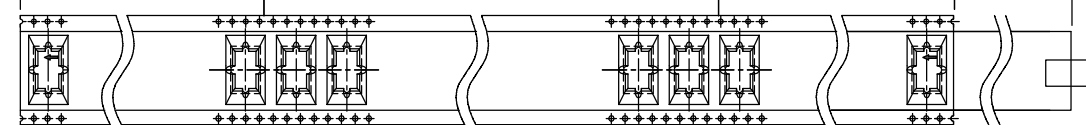

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
1.2 CARRIER TAPE: PET, LUCID
1.3 COVER TAPE: PS,TRANSPARENT
1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=32.5, $\phi A=330$
2.2 CARRIER TAPE: T=0.50 W=32.0
2.3 COVER TAPE: T=0.05 W=21.3
2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 550PCS/REEL
3.2 SECONARY PACKING: 10 REELS/CARTON(5500PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
4.2 PEELING ANGLE: 165° ~180°

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLT4F0-242XX0141	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13			
				0.0±0.35	X*REF±6°						
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE: TYPE C 24P/F SMT On the vertical board 8.80H		
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang			
									REV: AO		SHEET: 2/2

 万连科技
WanLian Teconology Co., Ltd

REV: A0	SHEET: 2/2
---------	------------