


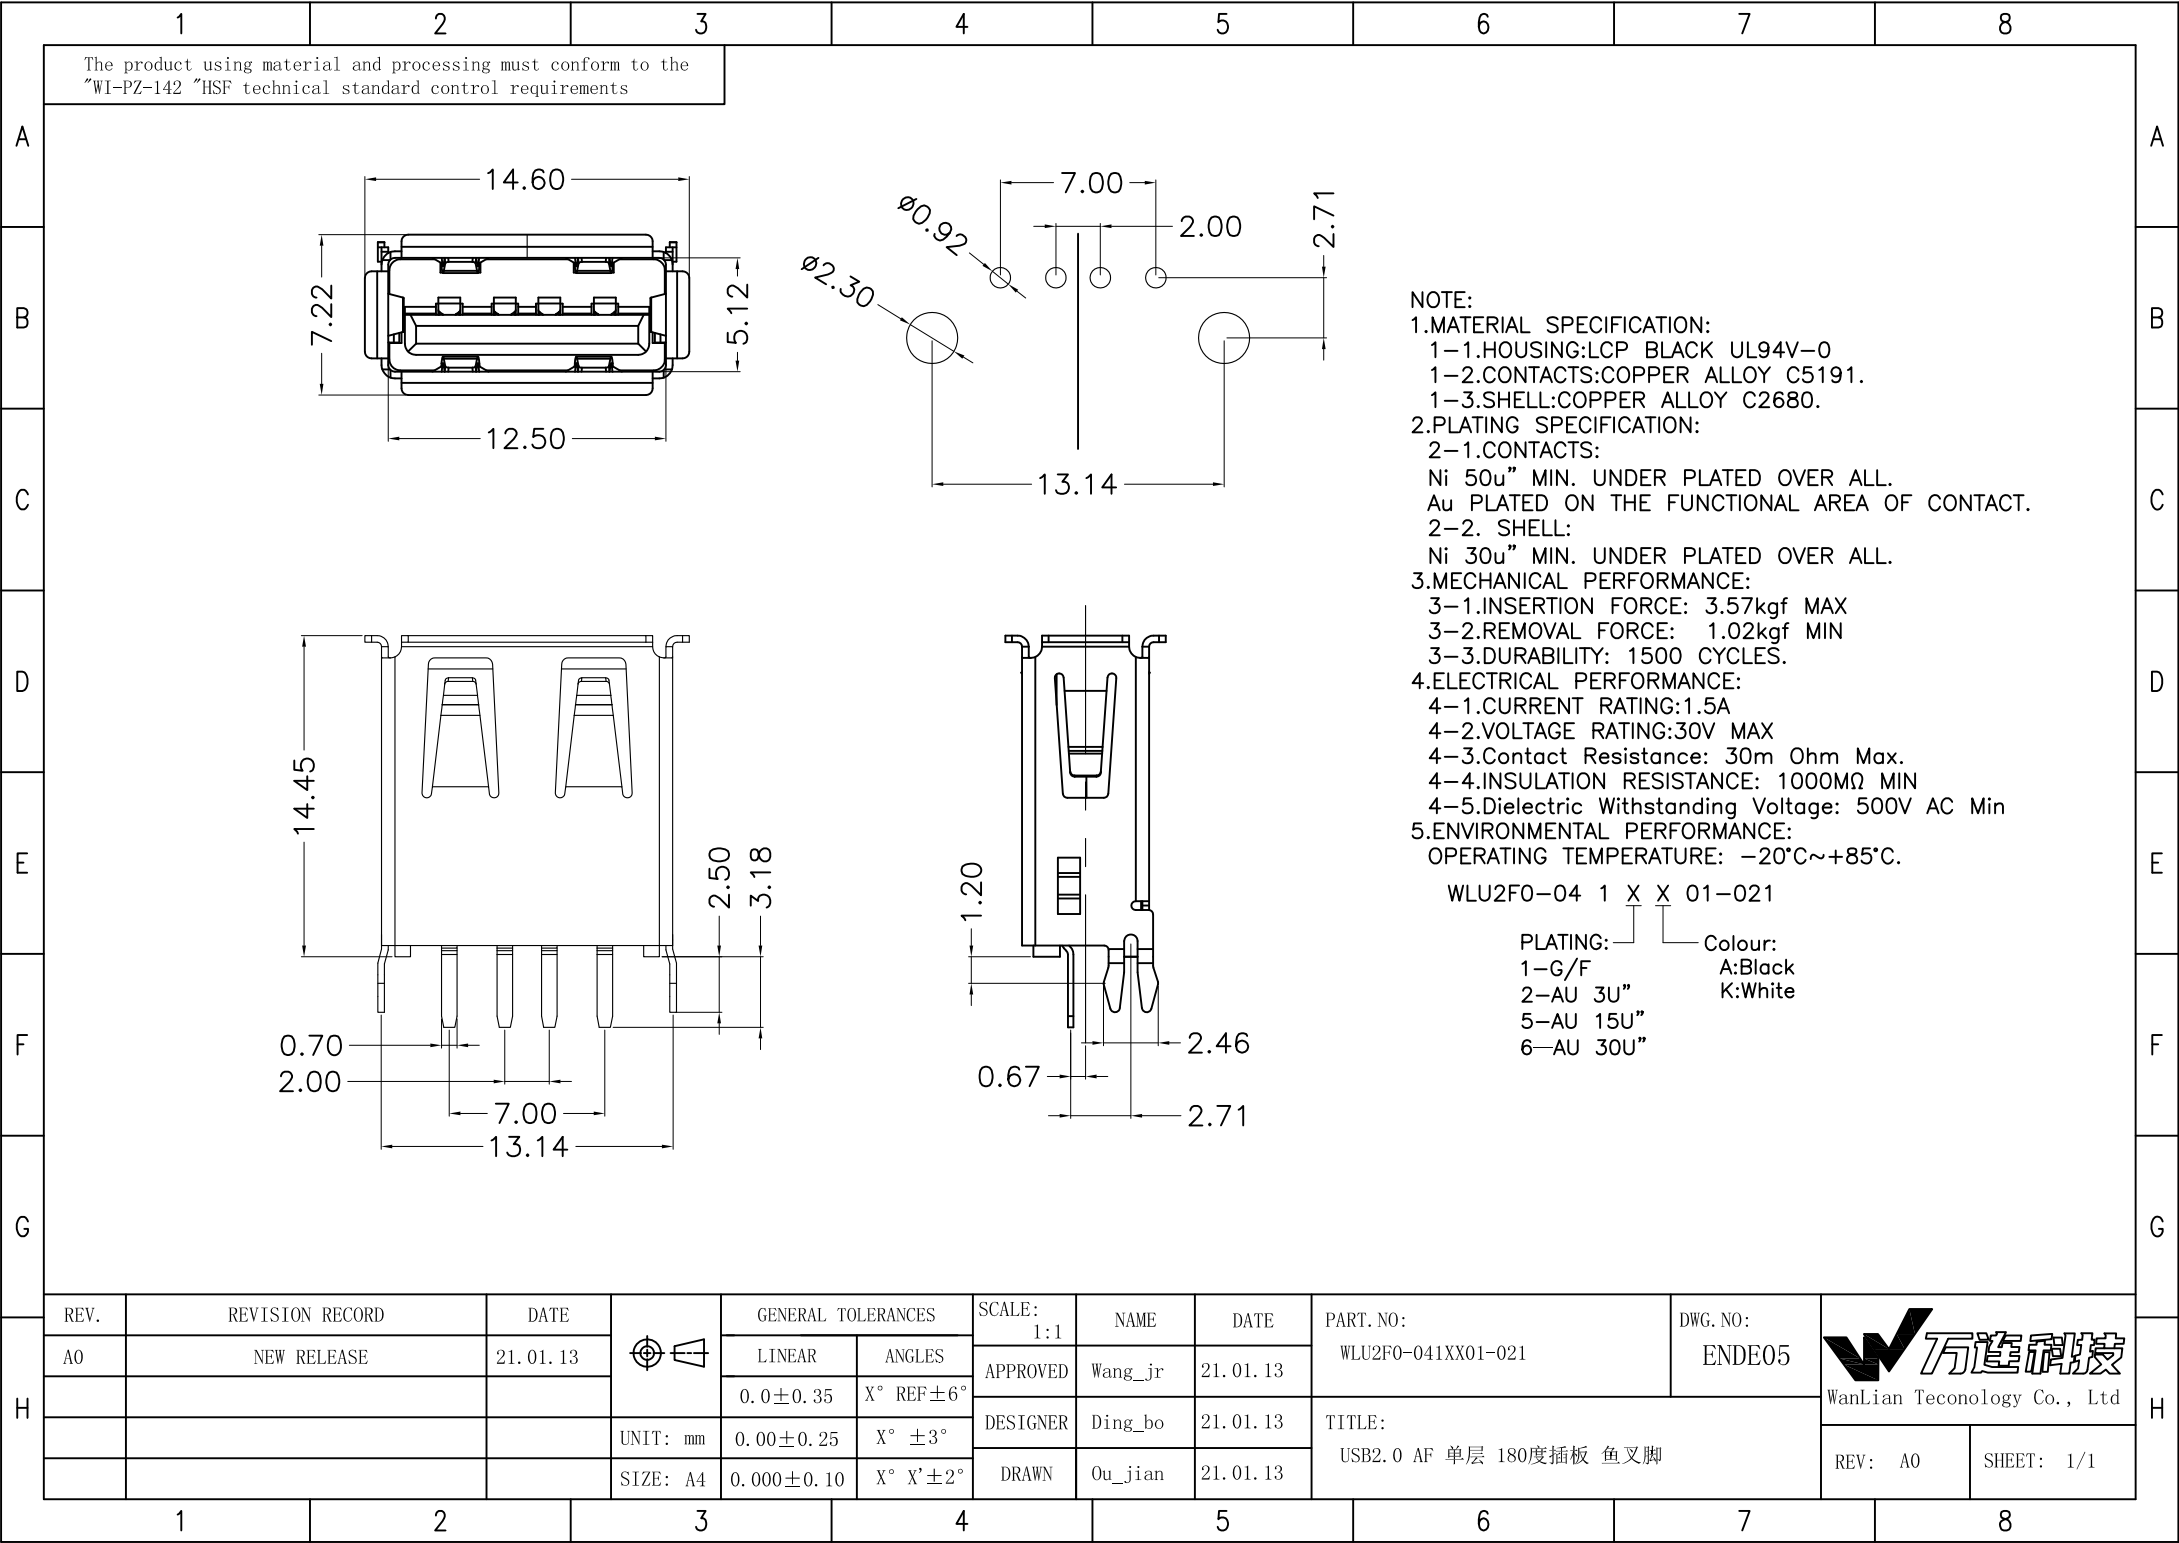

The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:LCP BLACK UL94V-0
1-2.CONTACTS:COPPER ALLOY C5191.
1-3.SHELL:COPPER ALLOY C2680.
2.PLATING SPECIFICATION:
2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
2-2. SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.INSERTION FORCE: 3.57kgf MAX
3-2.REMOVAL FORCE: 1.02kgf MIN
3-3.DURABILITY: 1500 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING:1.5A
4-2.VOLTAGE RATING:30V MAX
4-3.Contact Resistance: 30m Ohm Max.
4-4.INSULATION RESISTANCE: 1000MΩ MIN
4-5.Dielectric Withstanding Voltage: 500V AC Min
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -20°C~+85°C.

WLU2F0-04 1 X X 01-021

PLATING: 1-G/F 2-AU 3U" 5-AU 15U" 6-AU 30U"
Colour: A:Black K:White

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLU2F0-041XX01-021	ENDE05		
				0.0±0.35	X° REF±6°	DESIGNER	Ding_bo	21.01.13	TITLE: USB2.0 AF 单层 180度插板 鱼叉脚			
				UNIT: mm	0.00±0.25	X° ±3°	DRAWN	Ou_jian			21.01.13	
			SIZE: A4	0.000±0.10	X° X'±2°						REV: A0	SHEET: 1/1