

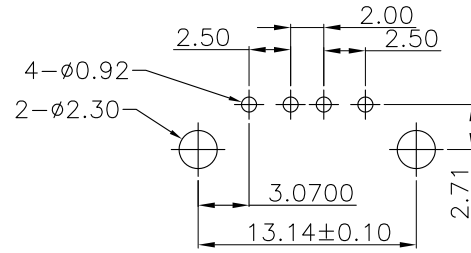

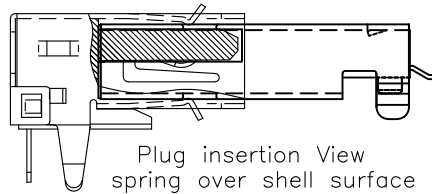



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

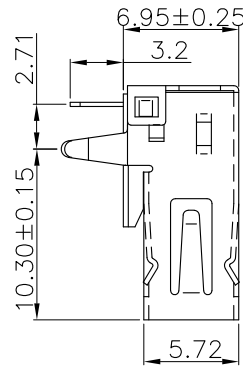

GENERAL TOLERANCES:±0.05



NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING:PBT BLACK UL94V-0

1-2.CONTACTS:COPPER ALLOY.

1-3.SHELL: COPPER ALLOY.

2.PLATING SPECIFICATION:

2-1.CONTACTS:

NI 50U" MIN. UNDER PLATED OVER ALL.

AU PLATED ON THE FUNCTIONAL AREA OF CONTACT.

2-2. SHELL:

NI 30U" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:

3-1.INSERTION FORCE: 3.57KGF MAX

3-2.REMOVAL FORCE: 1.02KGF MIN

3-3.DURABILITY: 1500 CYCLES.

4.ELECTRICAL PERFORMANCE:

4-1.CURRENT RATING:1.5A

4-2.VOLTAGE RATING:30V MAX

4-3.CONTACT RESISTANCE: 30M OHM MAX.

4-4.INSULATION RESISTANCE: 1000MΩ MIN

4-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN

5.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -20°C~+85°C.

6.PACKAGE SPEC:TRAY

WLU2F9-04 1 X X 0006

PLATING:

1-G/F

2-AU 3U"

5-AU 15U"

6-AU 30U"

COLOUR:

A:BLACK

K:WHITE

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: WLU2F9-041XX0006	DWG. NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21. 01. 13		LINEAR	ANGLES	APPROVED	Wang_jr	21. 01. 13			
				0. 0±0. 35	X° REF±6°				DESIGNER	Ding_bo	
			UNIT: mm	0. 00±0. 25	X° ±3°	TITLE: USB2. 0 AF 单层 90度插板 打K脚	REV: A0	SHEET: 1/1			
			SIZE: A4	0. 000±0. 10	X° X'±2°						