


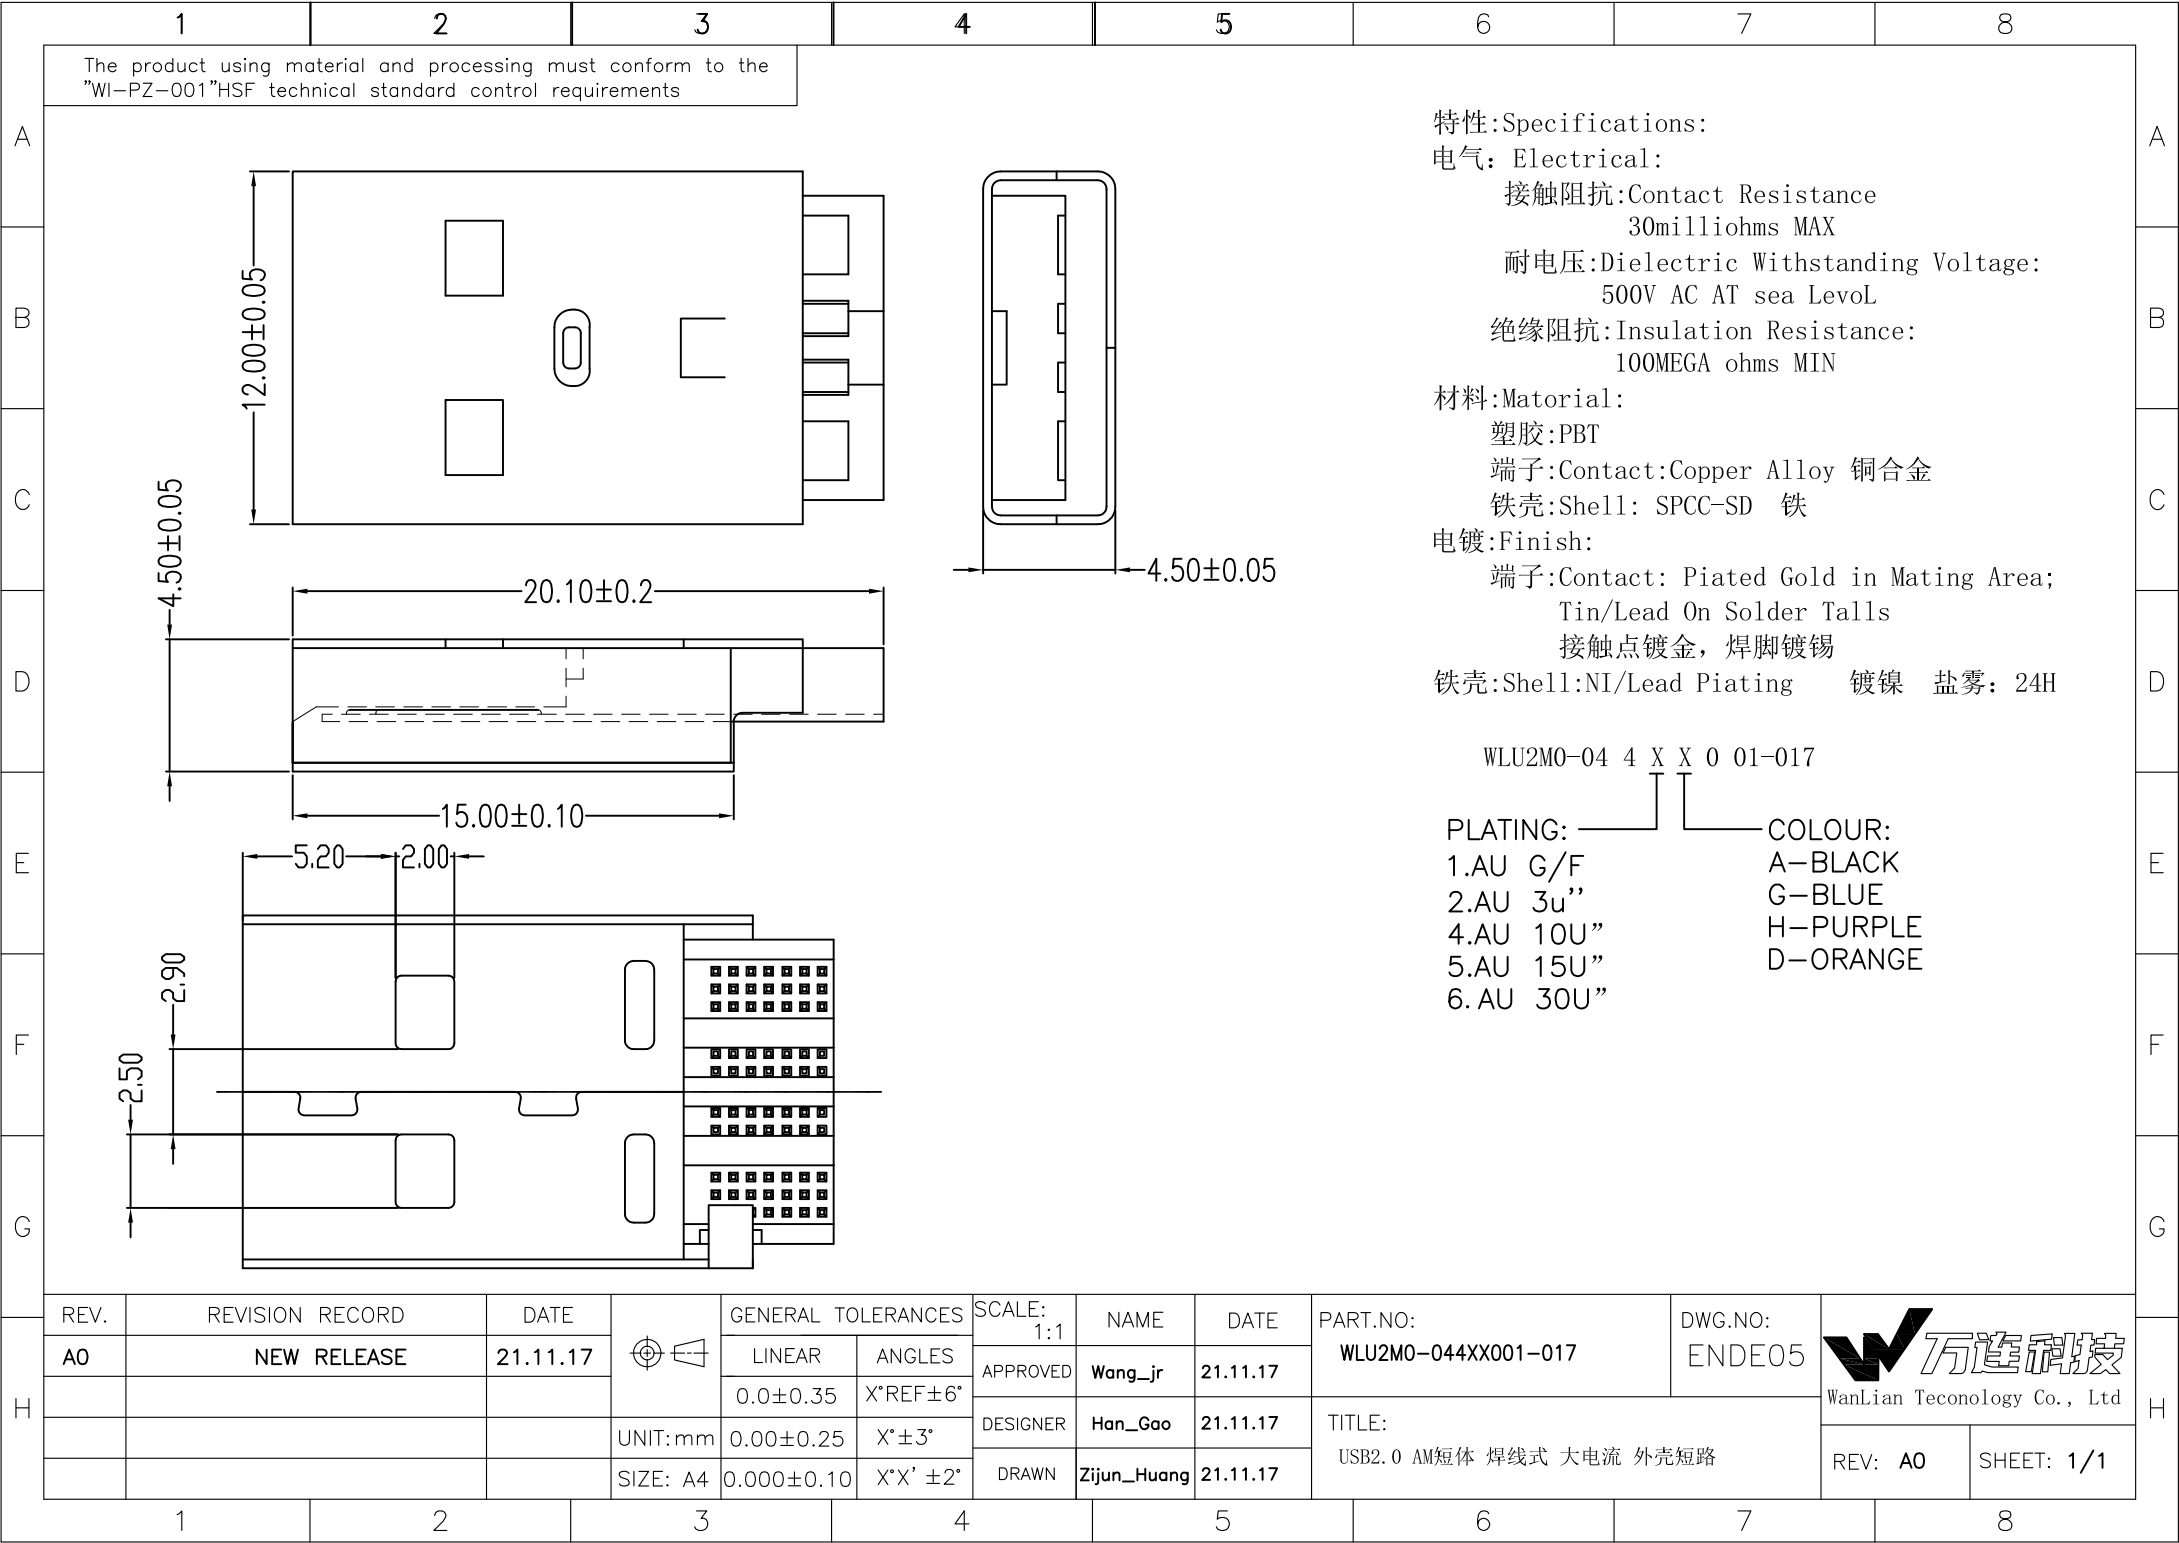

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

特性:Specifications:
电气: Electrical:
接触阻抗:Contact Resistance
30milliohms MAX
耐电压:Dielectric Withstanding Voltage:
500V AC AT sea Level
绝缘阻抗:Insulation Resistance:
100MEGA ohms MIN
材料:Material:
塑胶:PBT
端子:Contact:Copper Alloy 铜合金
铁壳:Shell: SPCC-SD 铁
电镀:Finish:
端子:Contact: Piated Gold in Mating Area;
Tin/Lead On Solder Tails
接触点镀金, 焊脚镀锡
铁壳:Shell:NI/Lead Plating 镀镍 盐雾: 24H

WLU2M0-04 4 X X 0 01-017

PLATING: 1.AU G/F
2.AU 3u''
4.AU 10U''
5.AU 15U''
6.AU 30U''
COLOUR: A-BLACK
G-BLUE
H-PURPLE
D-ORANGE

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	WLU2M0-044XX001-017	ENDE05		
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: USB2.0 AM短体 焊线式 大电流 外壳短路		REV: A0	SHEET: 1/1
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang				
			SIZE: A4	0.000±0.10	X°X' ±2°							