







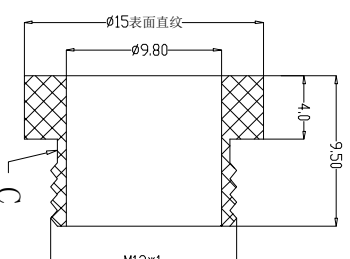
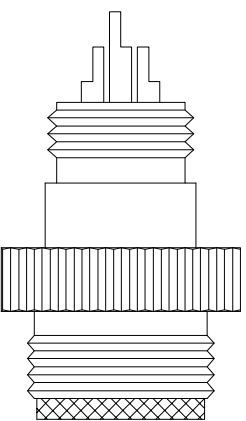



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

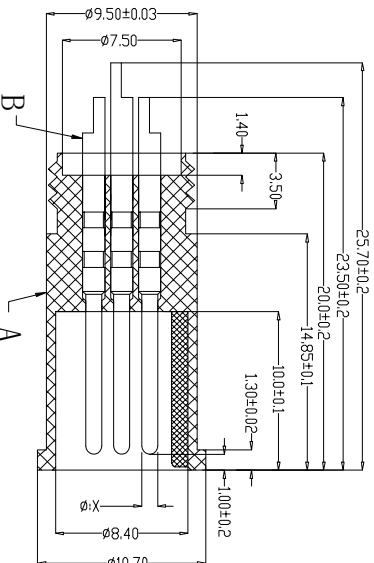

图形																		
规格	2P1N	2P1N	2P1N 4枚2	3P1N	3P1N	3P1N 4枚3	4P1N 2+2	4P1N	5P1N	5P1N 正方形2+3	5P1N 180°	5P1N 260° 2+3	5P1N 360°	6P1N 360°	6P1N 238°	6P1N 8枚6	7P1N	8P1N
X值	1.20	1.50	1.00	1.20	1.50	1.00	1.20+1.00	1.00	1.00	1.50+1.00	0.80	1.50+1.00	1.00	1.00	0.80	0.80	0.80	0.80

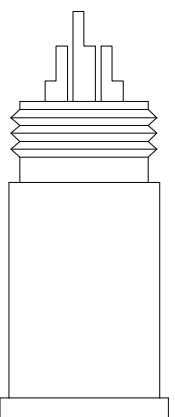

组合图

Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V	PARTS		MATERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	3
				C	NUT	ALALLOY	BLACK/SILVER	1
IP rating	IP67/IP68	Contract resistance	≤10MΩ	D				
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	E				

	TITLE	IP rating	IP60/IP68	Contact Resistance	$\leq 10m\Omega$	D			
P/N	M12防水 A-CODE 3P线端公头 B款9.5L铝螺丝4枚31.0*3	Flammability	UL94 V-0	Operation Temperature	-40° C ~ 105° C	E			
M12A03-07-083									

REV.	REVISION RECORD	DATE			SCALE:		NAME	DATE	PART. NO:	DWG. NO:	
			GENERAL TOLERANCES		1:1						
AO	NEW RELEASE		LINEAR	ANGLES	APPROVED				M12A03-07-083	ENDE05	

					TITLE:		Wanlian Technology Co., Ltd
		0.0±0.35	X ^{REF} ±6°				
	UNIT:mm	0.00±0.25	X' ±3'	DESIGNER			
	SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	M12防水 A-CODE 3P线端公头 B款9.5L铝螺丝 4改3 L-0x3	REV: A0	SHEET: 1/1