


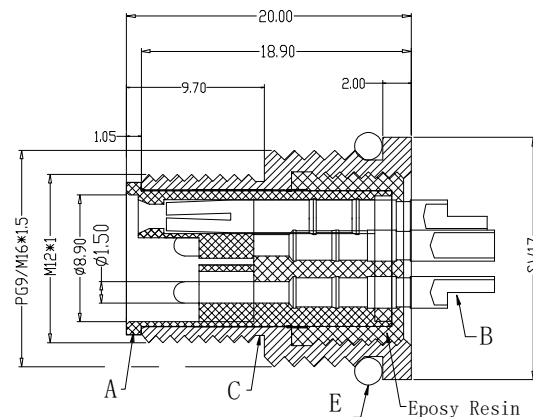
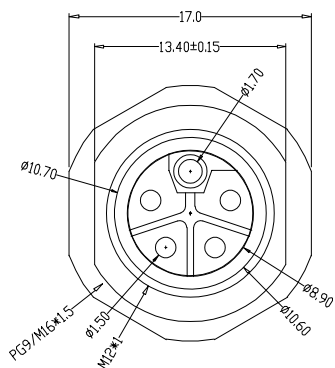
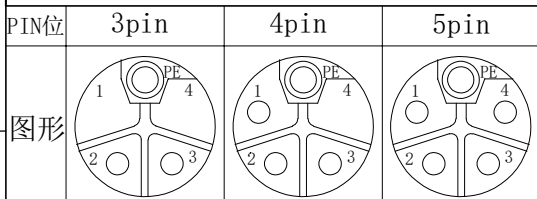
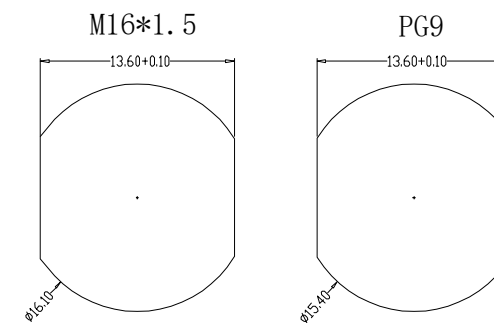


(RoHS

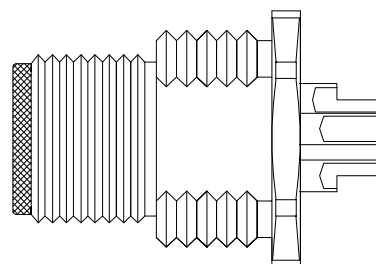

Recommended Panel Cut-out

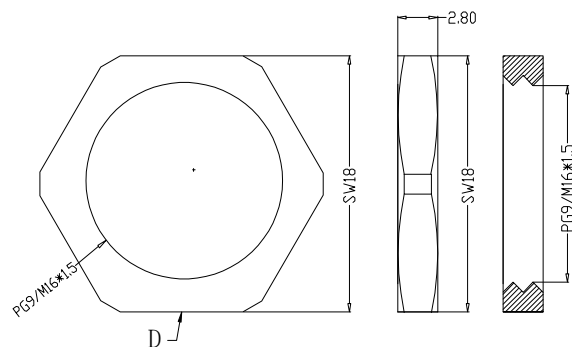

Engagemenr firce	≤50N	Rated volage	63v		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	16A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resirance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	3~5
				C	OUTER CONTACT	BRASS	NICKL PLATED	1
IP rating	IP67	Conract resistangce	≤10MΩ	D	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	E	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED			M12LXX-03-098	ENDE05	
				0.0±0.35	X°REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER			TITLE:	
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN			M12前锁面板 1编码 公头 焊线式 开孔M16. SW17T	
										REV: A0	SHEET: 1/1



Wanlian Technology Co., Ltd.

REV: A0	SHEET: 1/1
---------	------------