The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

PIN位	3pin	4pin	5pin
图形			



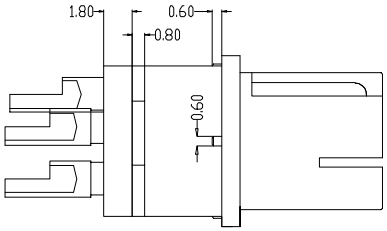

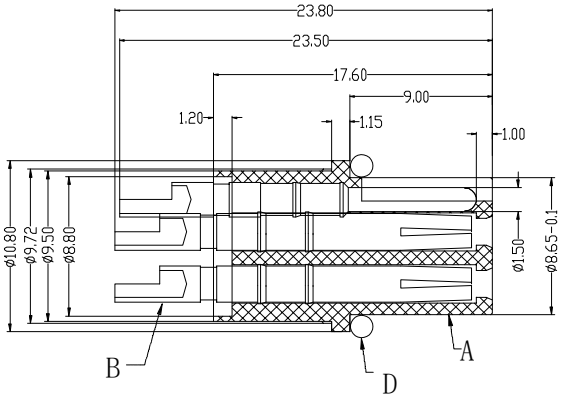



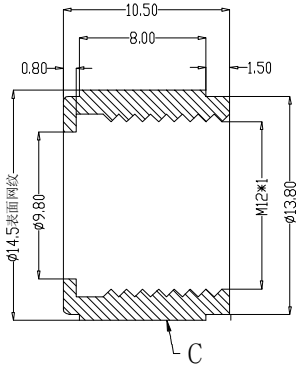



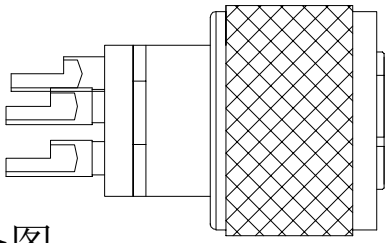

组合图

Engagemenr firce	≤50N	Rated volage	63v
Disengagement force	≥5N	Rated current	16A
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ
IP rating	IP67	Conract resistangce	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	3~5
C	NUT	BRASS	NICKL PLATED	1
D	O-RING	EPDM	BLACK	1
E				

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	21.11.17

UNIT: mm

SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED		
DESIGNER		
DRAWN		

PART.NO: M12LXX-08-105

DWG.NO: ENDE05

TITLE: MM12线端成型式 L编码 母头 焊线式 +10.5L网纹螺母

万连科技 WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1