

1

2

3

4

5

6

7

8


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


PIN位


3pin


4pin


图形




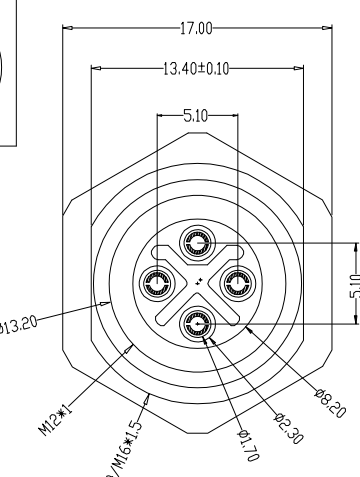


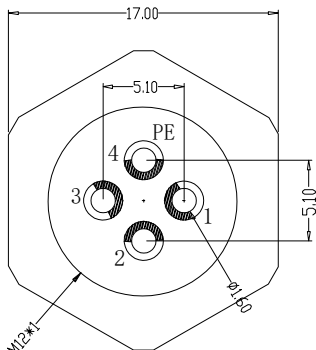


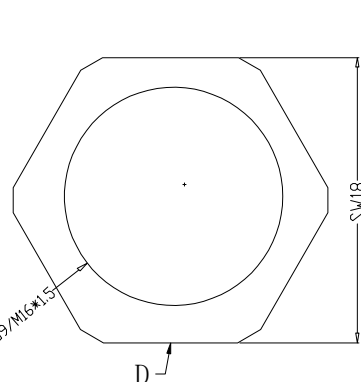



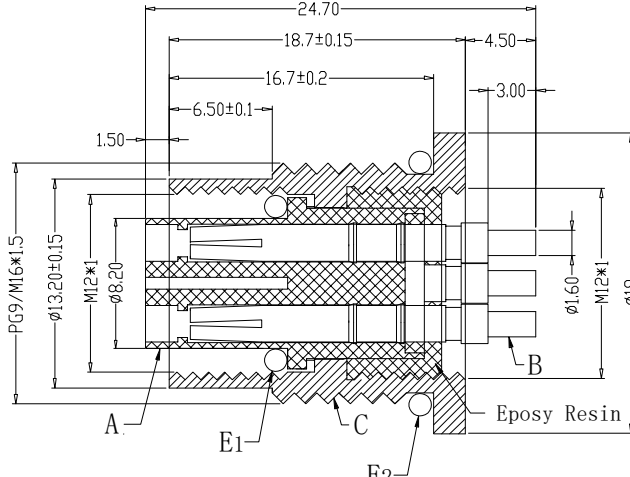

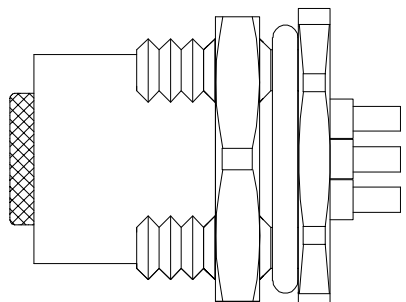


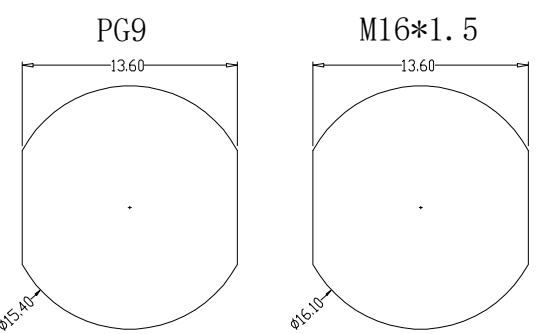

PG9

M16*1.5

Engagemnr firce	≤50N	Rated volage	630V		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	12A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resirance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	3~4
IP rating	IP67	Conract resistangce	≤10MΩ	C	OUTER CONTACT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D	NUT	BRASS	NICKL PLATED	1
				E	O-RING	EPDM	BLACK	2

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12SXX-04-086	DWG.NO: ENDE05	 WanLian Technology Co., Ltd		
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES							APPROVED	
				0.0±0.35	X°REF±6°								DESIGNER
				0.00±0.25	X°±3°								
			UNIT:mm	0.00±0.10	X°X' ±2°	TITLE: M12前锁面板 S编码 母头 焊线式开孔M16. SW17T				REV: AO	SHEET: 1/1		
			SIZE: A4	0.000±0.10	X°X' ±2°								

1

2

3

4

5

6

7

8

RoHS

Recommended Panel Cut-out

组合图

A

B

C

D

E

F

G

H

图形

图形

图形

图形

图形

图形

图形

图形

1

2

3

4

5

6

7

8

RoHS

Recommended Panel Cut-out

组合图