
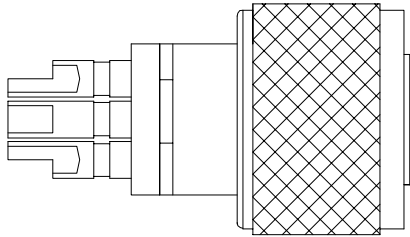
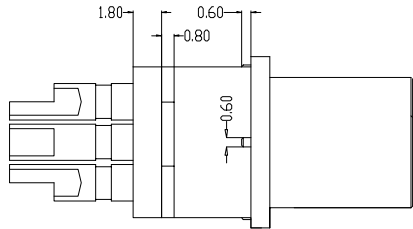

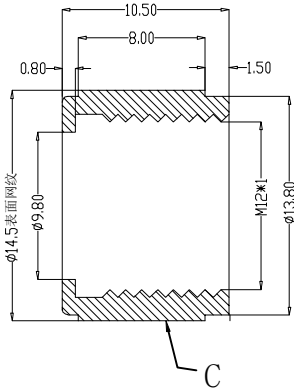

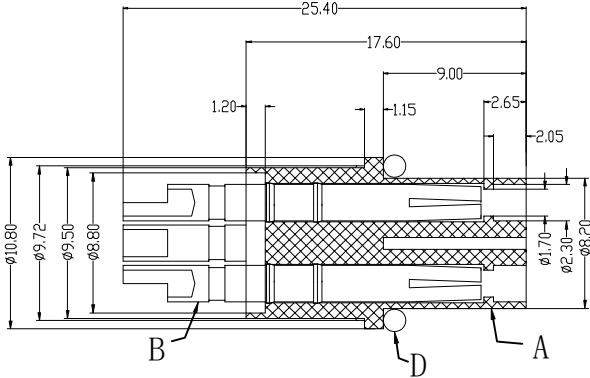



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

图形

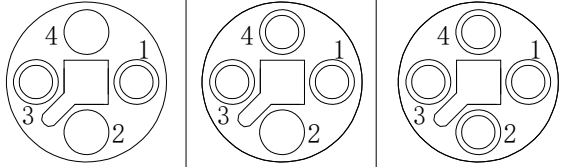

Engagemnr firce	≤50N	Rated volage	50v/63v		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	12A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resirance	≥1000MΩ	B	CONTACT	BRONZE	GOLD PLATED	2~4
IP rating	IP67	Conract resistangce	≤10MΩ	C	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D	O-RING	EPDM	BLACK	1
				E				

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.11.17	UNIT:mm	APPROVED			M12TXX-08-107	ENDE05		
			SIZE: A4	DESIGNER			TITLE:		REV: A0	SHEET: 1/1
				DRAWN			M12线端成型式 T编码 母头 焊线式 +10.5L网纹 螺母			