
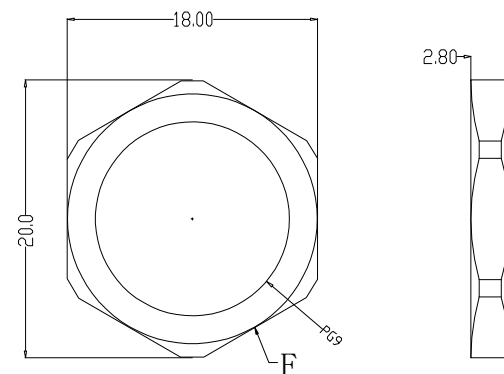
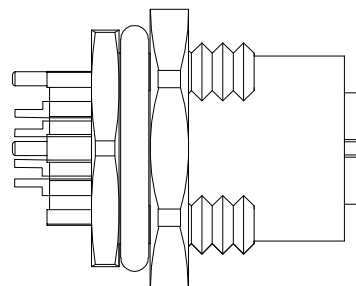
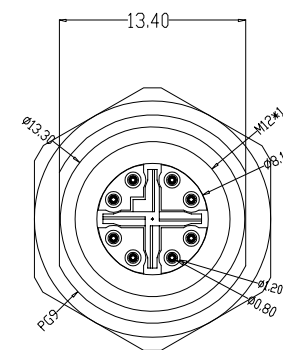


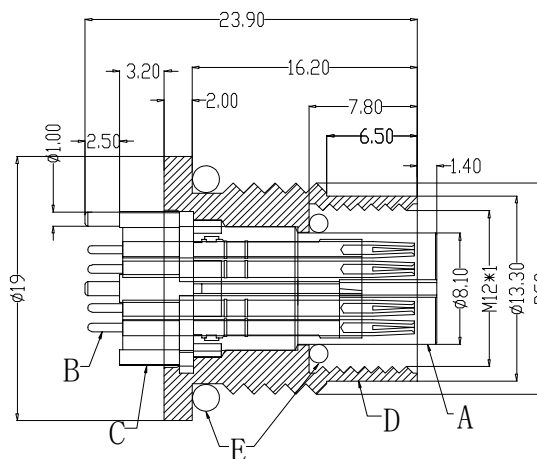

组合图

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	8
C	OUTETCONTACT	AINC ALLOY	NICKL PLATED	1
D	NUT	AINC ALLOY	NICKL PLATED	1
E	O-RING	BRASS	NICKL PLATED	1
C	F			

Engagemenr firce	≤50N	Rated volage	48v
Disengagement force	≥10N	Rated current	0. 5A
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ
IP rating	IP67	Conract resistangce	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105°

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12X08-04-110	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED					
				0.0±0.35	X°REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER			TITLE: M12前锁面板 X编码 8芯 母头 PCB式 开孔PG9 SW17T	
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN				
										REV: A0	SHEET: 1/1